


EE 446 Lab 9

Aarav Wadhwani


1. Screenshots showing both ASL gestures correctly identified by the Arduino Serial Monitor:

Hi Gesture:

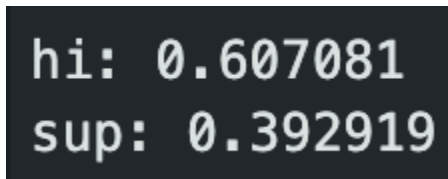

```
hi: 0.607081
sup: 0.392919
```

Sup Gesture:

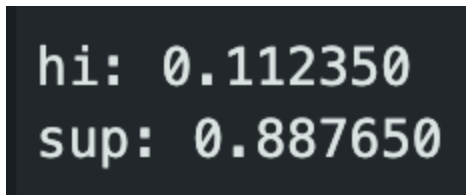

```
hi: 0.112350
sup: 0.887650
```

2. A brief explanation of the software issue(s) you fixed in the notebook:

I fixed the notebook so the model matches the task it is actually doing: gesture classification. The main issue was that it was using regression settings (mse and mae) even though the labels are one-hot class targets, so I switched it to `categorical_crossentropy` with accuracy in the training cell.

I also updated the training-progress plot to use the correct history values and labels for accuracy instead of the old metric, so the later visualization stays consistent in the plotting cell.