



# SRM INDUSTRIES INC.



*The Toughest Hose Protection Products on the Planet...Period!*

## RHINO SPIRAL GUARD™ HD

### MATERIAL

- High Density Polyethylene

### FEATURES

- Easy to install on loose or mounted hose & cables
- Strong, Flexible, Light Weight
- UV Resistant
- Beveled Edges for Safety
- Temperature Range: -40°F to +280°F (-40°C to +137°C)
- Meets California Prop 65
- Meets RoHS

### USES

- Preventing hose wear due to friction & abrasion
- Protecting hoses from external forces & harsh environments
- Bundling hoses, cables
- Colors for providing "HIGH" visibility
- Tree Sapling Hose Cover Protection


### MARKETS

- Construction
- Logging
- Welding
- Transportation
- Agriculture
- Manufacturing
- Marinas
- Mining

**Note:** We reserve the right to make any engineering or material changes at any time to our products for enhancement, performance and quality.

*Proper use of product is the sole responsibility of the user.*

Manufactured in the USA for SRM Industries Inc.

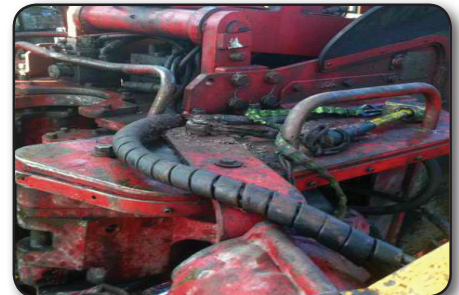



**The Toughest Hose Protection Products on the Planet...Period!**

## RHINO SPIRAL GUARD™ HD

Meets California Prop 65 & RoHS

SRM Part Number	I.D. Inches	Hose O.D. Range Opening	
		In.	Mm.
RSG-38HD	0.380	0.39 - 0.66	10 - 17
RSG-50HD	0.500	0.47 - 0.86	12 - 27
RSG-62HD	0.620	0.62 - 1.06	16 - 30
RSG-95HD	0.875	0.86 - 1.37	22 - 35
RSG-1.125HD	1.000	1.06 - 1.69	27 - 43
RSG-1.50HD	1.500	1.30 - 2.17	33 - 55
RSG-1.75HD	1.750	1.75 - 2.52	42 - 64
RSG-2.25HD	2.000	2.05 - 2.95	52 - 75
RSG-2.62HD	2.625	2.56 - 3.80	65 - 97
RSG-3.00HD	3.000	3.15 - 4.30	50 - 110
RSG-4.00HD	4.000	3.80 - 4.90	97 - 125
RSG-5.00HD	5.000	4.80 - 6.00	122 - 152
RSG-6.00HD	6.000	5.70 - 7.00+	145 - 178

See Cross Reference Chart on page 26

Add Color suffix after Part Number: Y=Yellow, R=Red, BL=Blue: i.e.: RSG-1.50HDBL is for Blue Spiral Wrap  
Manufactured in the USA for SRM Industries Inc.

### Nominal Dimensions for RHINO SPIRAL GUARD HD:

SRM Part Number	I.D.		Wall Thickness		Helix Width		Box Footage	
	In.	Mm.	In.	Mm.	In.	Mm.	Ft.	M
RSG-38HD	0.38	10	0.060	1.5	0.40	10	165	50.3
RSG-50HD	0.50	11	0.060	1.5	0.48	12	66 & 100	20.1 & 30.48
RSG-62HD	0.62	14	0.070	1.8	0.57	14.5	66 & 100	20.1 & 30.48
RSG-95HD	0.875	20	0.080	2.0	0.82	21	66 & 100	20.1 & 30.48
RSG-1.125HD	1.00	25	0.090	2.3	0.94	24	66 & 100	20.1 & 30.48
RSG-1.50HD	1.50	32	0.090	2.3	1.18	30	66 & 100	20.1 & 30.48
RSG-1.75HD	1.75	38	0.120	3.0	1.38	35	66 & 100	20.1 & 30.48
RSG-2.25HD	2.00	50	0.140	3.5	1.57	40	66 & 100	20.1 & 30.48
RSG-2.62HD	2.63	60	0.150	3.8	1.60	40	66	20.1
RSG-3.00HD	3.00	72	0.180	4.6	1.78	45	66	20.1
RSG-4.00HD	4.00	102	0.220	5.6	2.17	55	40	12.19
RSG-5.00HD	5.00	127	0.220	5.6	2.17	55	27	8.23
RSG-6.00HD	6.00	152	0.220	5.6	2.36	60	20	6.096



*The Toughest Hose Protection Products on the Planet...Period!*

## RHINO SPIRAL GUARD™ HD

Meets CA Prop 65  
↓ Meets RoHS ↓

### CROSS REFERENCE CHART

Meets CA Prop 65  
↓ Meets RoHS ↓

SRM P/N:	ID	Opening Range in Inches	Available Lengths in Feet	Aeroquip P/N:	I.D.	Dixon P/N:	I.D.	F & R P/N:	I.D.	Gates P/N:	I.D.	SRM P/N:
				900952-4	0.24							
RSG-38HD	0.38	.38-.66	165	900952-6	0.37					1174	0.38	RSG-38HD
RSG-50HD	0.50	.47-.86	66/100	900952-8	0.49	NFSGX16	0.45	93050	0.50	1175	0.50	RSG-50HD
RSG-62HD	0.63	.62-1.06	66/100	900952-10	0.63	NFSGX20	0.55	93063	0.63	1176	0.63	RSG-62HD
RSG-95HD	0.75	.86-1.37	66/100	900952-12	0.83	NFSGX25	0.80	93075	0.75	1177	0.84	RSG-95HD
RSG-1.125HD	1.13	1.06-1.69	66/100	900952-27	1.06	NFSGX32	1.00	93100	1.00	1178	1.06	RSG-1.125HD
RSG-1.50HD	1.50	1.30-2.17	66/100	900952-22	1.34	NFSGX40	1.25	93125	1.25	1179	1.34	RSG-1.50HD
RSG-1.50HD	1.50	1.30-2.17	66/100	900952-30	1.58	NFSGX50	1.50	93150	1.50			RSG-1.50HD
RSG-1.75HD	1.75	1.65-2.52	66/100			NFSGX63	2.00	93200	2.00	1180	1.73	RSG-1.75HD
RSG-2.25HD	2.25	2.05-2.95	66			NFSGX75	2.40	93250	2.50	1181	2.17	RSG-2.25HD
RSG-2.62HD	2.63	2.56-3.80	66			NFSGX90	2.83	93300	3.00	1182	2.60	RSG-2.62HD
RSG-3.00HD	3.00	3.15-4.30	66			NFSGX110	3.43	93350	3.50	1183	3.10	RSG-3.00HD
RSG-4.00HD	3.90	3.80-4.90	40					93400	4.00	1184	3.90	RSG-4.00HD
RSG-5.00HD	5.00	4.80-6.00	27					93500	5.00			RSG-5.00HD
RSG-6.00HD	6.00	5.70-7.00+	20					93600	6.00			RSG-6.00HD

Meets CA Prop 65  
↓ Meets RoHS ↓

Meets CA Prop 65  
↓ Meets RoHS ↓

SRM P/N:	ID	Opening Range in Inches	Available Lengths in Feet	Parker P/N:	ID.	Pigs Tail P/N:	I.D.	Tompkins ProWrap Plus Extreme Duty P/N:	ID	Weather Head P/N:	I.D.	SRM P/N:
RSG-38HD	0.38	.38-.66	165			R12SSG	0.40	PWP-12	0.375			RSG-38HD
RSG-50HD	0.50	.47-.86	66/100			R16SSG	0.45	PWP-16	0.500	A9900	0.492	RSG-50HD
RSG-62HD	0.63	.62-1.06	66/100	HG-075	0.75	R20SSG	0.55	PWP-20	0.625	A9901	0.668	RSG-62HD
RSG-95HD	0.75	.86-1.37	66/100	HG-100	1.00	R25SSG	0.80	PWP-25	0.830			RSG-95HD
RSG-1.125HD	1.13	1.06-1.69	66/100	HG-125	1.25	R32SSG	1.00	PWP-32	1.060	A9902	1.014	RSG-1.125HD
RSG-1.50HD	1.50	1.30-2.17	66/100	HG-150	1.50	R40SSG	1.26	PWP-40	1.340	A9903	1.600	RSG-1.50HD
RSG-1.75HD	1.75	1.65-2.52	66/100	HG-200	2.00	R50SSG	1.50	PWP-50	1.730			RSG-1.75HD
RSG-2.25HD	2.25	2.05-2.95	66			R63SSG	2.00	PWP-63	2.170			RSG-2.25HD
RSG-2.62HD	2.63	2.56-3.80	66			R75SSG	2.40	PWP-75	2.600	A9904	2.457	RSG-2.62HD
RSG-3.00HD	3.00	3.15-4.30	66	HG-350	3.50	R90SSG	2.83	PWP-90	3.110	A9905	3.065	RSG-3.00HD
RSG-4.00HD	3.90	3.80-4.90	40			R110SSG	3.43	PWP-110	3.900			RSG-4.00HD
RSG-5.00HD	5.00	4.80-6.00	27			R140SSG	5.07	PWP-140	5.070			RSG-5.00HD
RSG-6.00HD	6.00	5.70-7.00+	20			R160SSG	5.87	PWP-160	6.000			RSG-6.00HD