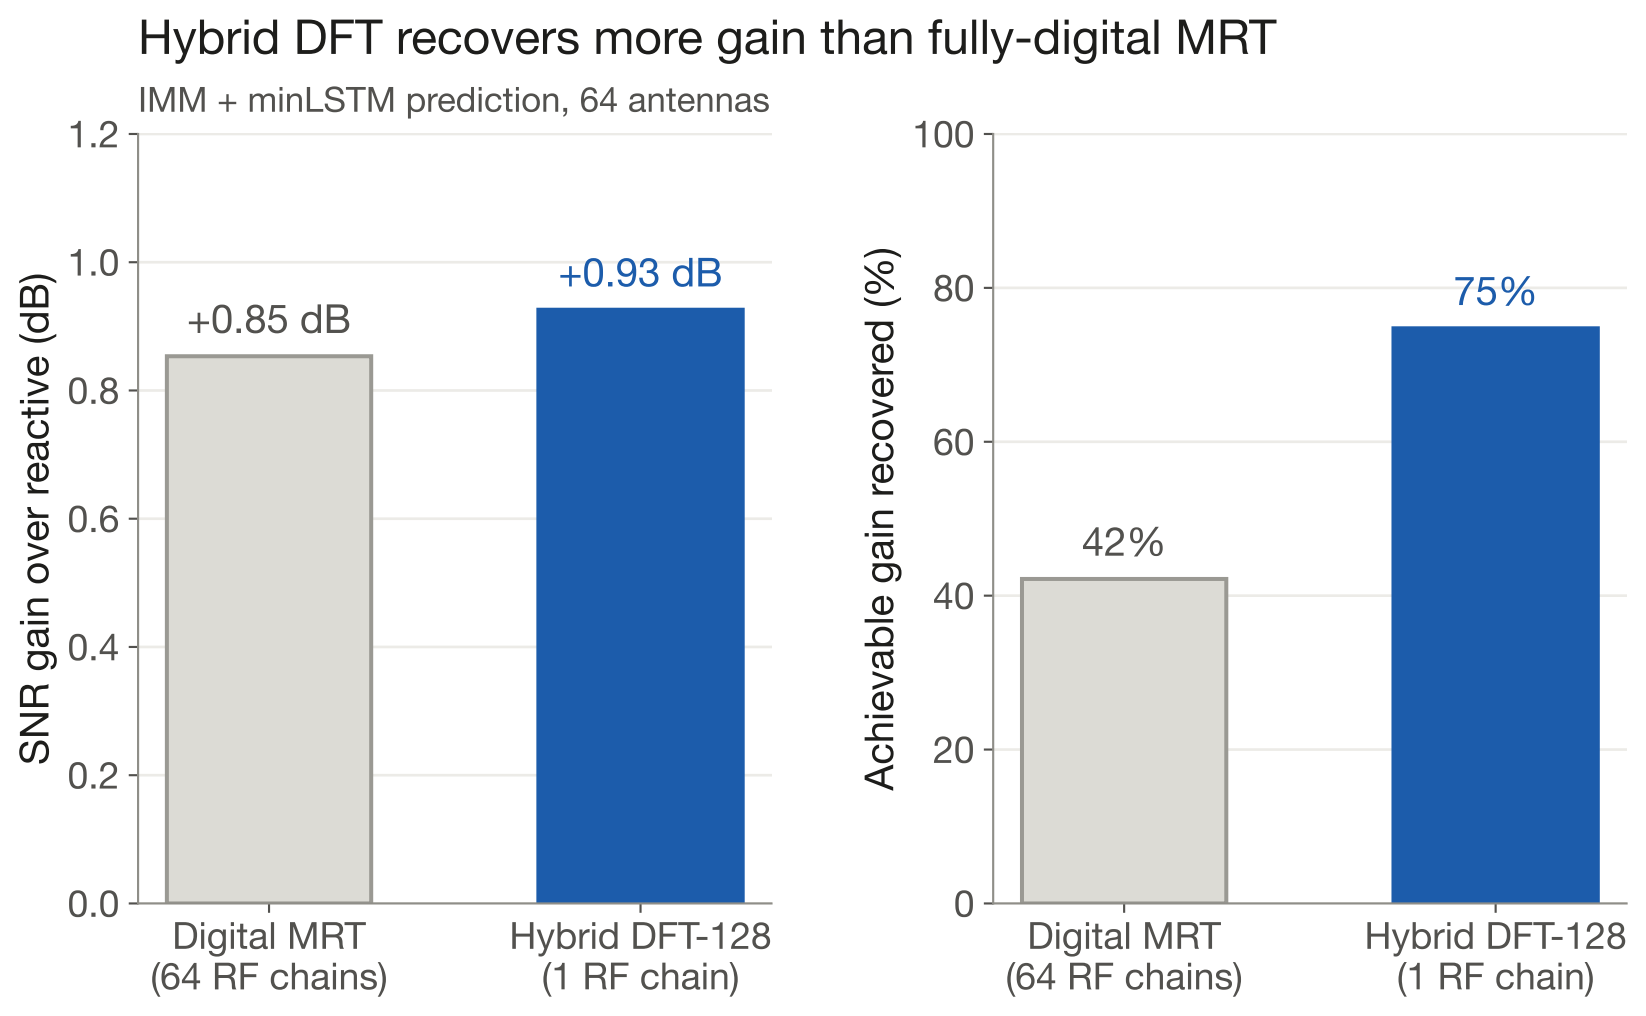
Hybrid DFT recovers more gain than fully-digital MRT
IMM + minLSTM prediction, 64 antennas
SNR gain over reactive (dB)
1.2
1.0
0.8
0.6
0.4
0.2
0.0
+0.85 dB
+0.93 dB
Digital MRT
(64 RF chains)
Hybrid DFT-128
(1 RF chain)
Achievable gain recovered (%)
100
80
60
40
20
0
42%
75%
Digital MRT
(64 RF chains)
Hybrid DFT-128
(1 RF chain)