
BROMIC
HEATING

BUILDER / INSTALLER

# How electrical contractors win more outdoor heating work

*For electrical contractors: code, controls, voltages and weather ratings for Bromic outdoor heaters, and how the Bromic Partner Program supports your projects.*

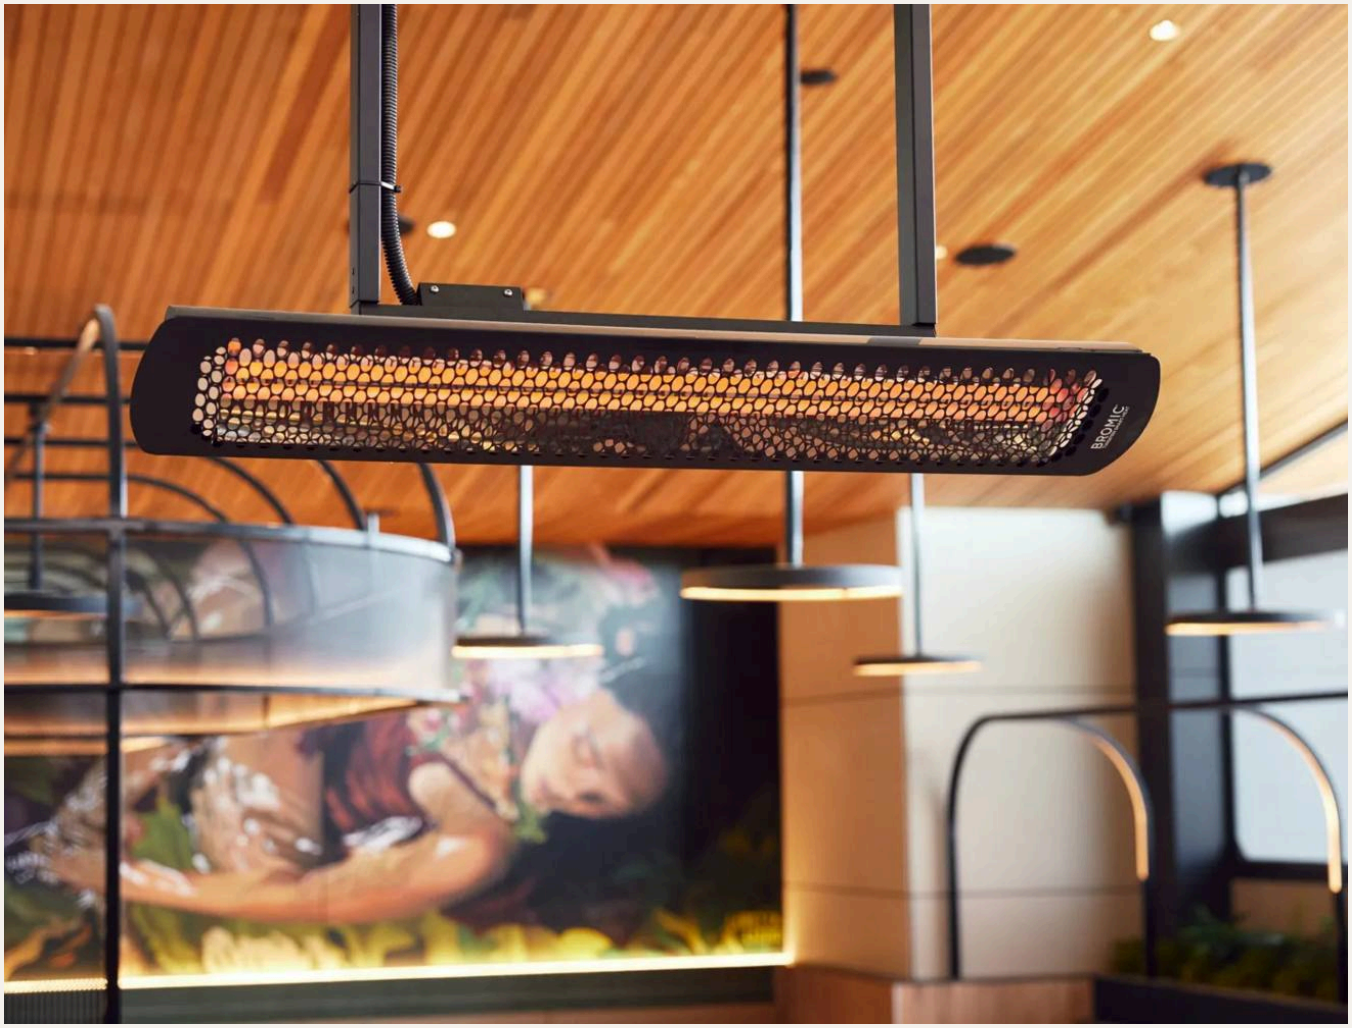



EDITION
November 2026

BROMIC HEATING
bromic.com

# How electrical contractors win more outdoor heating work

Outdoor rooms have become part of the house, and the people who live in them want to stay out after dark. Heat is what lets them. The contractor who can design the circuit, connect the controls and hand over a system that works first time becomes the person every builder, designer and homeowner calls back.

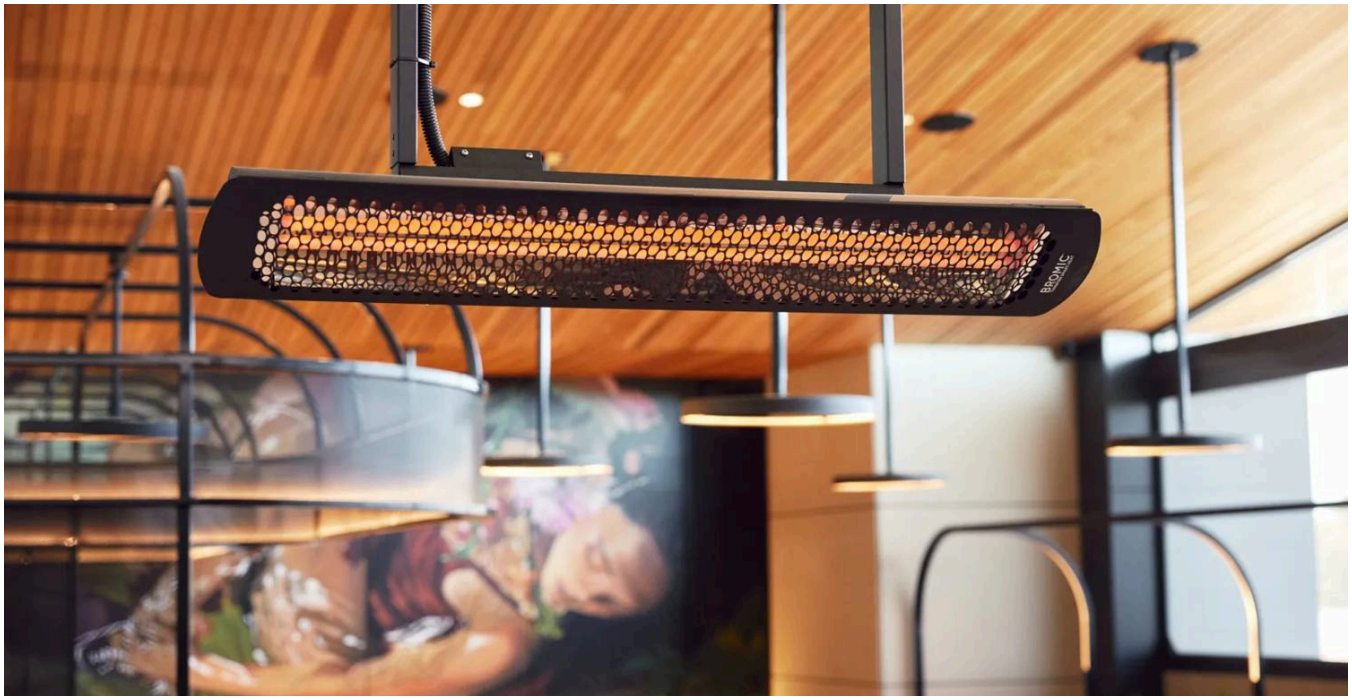


Black Tungsten heater on suspension poles over a restaurant dining room that opens to the outdoors

## The work is already on the plan

The patio is standard. 60.5% of single-family homes started in 2025 came with one.[1] Buyers want it: 86% rate a patio essential or desirable.[2] Heat is the gap: only 23% of homeowners prioritise outdoor heating when they plan the space.[3] That gap is your opening. Raise heat at the first site walk, price the pre-wire with the patio, and the job is yours before anyone else is asked.

Your part of the job is clear: design the electrical system that powers the space, install it safely, and make sure it runs efficiently for years. Bromic's part is to make that easy: the right heater for the space, the controls to run it, and people who answer the phone when you have a question on site.



Two installers fitting a recessed heater into a timber-lined ceiling

## 1. Get the code right first

Every outdoor heating job starts and ends with the code. Bromic electric heaters are installed to ANSI/NFPA 70, the National Electrical Code, as your state and city adopt it.[4][11] A job that misses it costs you twice: in red tags, stop-work orders and repeat visits, and in the referral you do not get.

**What we see go wrong on outdoor jobs**


- Heaters fed from a shared circuit instead of their own, so the breaker trips the first cold night.
- Cable runs left unprotected where a patio will be used hard.
- Heaters mounted below the minimum height. Bromic's guidance is at least 72 in above the floor for a wall mount and at least 96 in for a ceiling mount; it varies with output, so take the figure from the installation manual for the model.[4]
- Supply voltage not checked against the heater. A 240 V heater on a 208 V supply gives less heat than the client was promised.
- Controls left to the end, with no box or cable run planned for them.

**How Bromic helps you get it right**

- **A free heating design plan** for every project: heater selection and positions on the client's plan, coverage, and a parts and controls list you can price from.[7][10]
- **Installation manuals and CAD and Revit/BIM files** for every heater, from the technical resources page.[10]

- **Technical support** from people who know the products: 1-800-301-1293, Monday to Friday, 9 am to 4 pm Pacific.[7]
- **The pre-wire guide** (asset:A16): circuits, boxes, blocking, recess openings and control runs for every heater type, with a hand-off sheet.

Codes vary by location. Confirm every installation with the local building authority and the authority having jurisdiction; electrical work must be carried out by a licensed electrician. The primary source is NFPA 70 as adopted locally.[11]

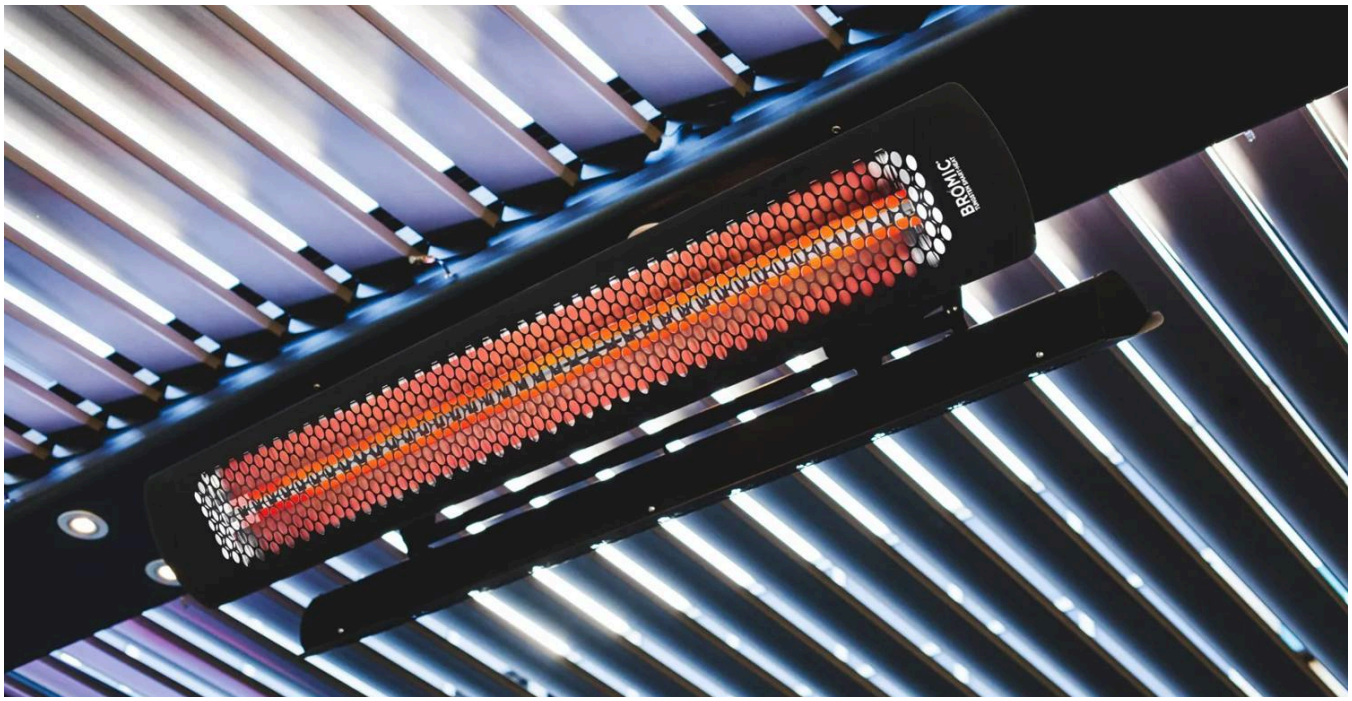


Black Tungsten heater glowing under a louvred pergola roof

## 2. Connect to any system

The hardest part of most outdoor jobs is not the heater. It is fitting new equipment into the electrical system and the smart home the client already has. Bromic heaters and Affinity Smart-Heat Controls are built to make that part simple.

**Voltage.** Tungsten Electric runs on 220–240 V and 208 V, and the 4000 W and 6000 W models also on 277 V, the commercial supply many restaurants and hotels have.[5] Commercial projects can choose 208 V, 240 V or 277 V supply.[7] Match the heater to the supply at the design stage, not on the day of install.

**Controls are part of every heater.** A Bromic heater is a complete system only with its controls. Every recommendation in this guide includes them.

| CONTROL | WHAT IT DOES | WHAT TO PLAN FOR |
|---|---|---|
| Affinity Smart-Heat On/Off controller | Switches heaters on and off by zone, by app or wall switch | 6 kW per channel at 208–277 V; IP54 enclosure[6] |
| Affinity Smart-Heat Dimmer controller | Sets heat output by zone, so owners turn it down on mild nights | 6 kW per channel at 208–277 V[6] |
| Affinity Eclipse controller | Runs Eclipse heat and rim lighting | One Eclipse heater per channel[6] |
| Manual wall switch | Local on and off, single or dual | 20 A, 120–277 V; indoor or outdoor kit[6] |
| Bromic Smart-Heat app | Zones, schedules and timers from a phone | Wi-Fi coverage at the controller[7] |
| Affinity expansion board | Ethernet and 0–10 V for a building management or home automation system | Built into the 5-channel controller; BMS mode turns off the app[6] |

Wi-Fi and app features need compatible Affinity Smart-Heat Controls, sold separately. The controls connect to Amazon Alexa and Google Assistant, and to Control4, Crestron and Lutron systems; compatibility varies by system and may need extra integration hardware or configuration.[7] The controllers are certified to UL 60730-1 and CAN/CSA E60730-1.[6]

The 4000 W and 6000 W Tungsten heaters have two elements that can be controlled separately, so one heater can run at part output on a dimmer channel without a second circuit.[5]



Heaters recessed in the roof of an open timber pavilion above a long dining table

### Your checklist before rough-in

- ☐ Supply voltage confirmed for every heater (208, 240 or 277 V).

- ☐ One dedicated circuit per heater or per controller channel, sized from the installation manual and the code.
- ☐ Controller location chosen: dry, reachable, inside Wi-Fi range if the app is used.
- ☐ Box and cable run to every wall switch.
- ☐ Recess framing or suspension pole fixing agreed with the builder.[4]
- ☐ Integration with the home or building system confirmed with the integrator.

---

## 3. Build for the weather

Outdoor equipment lives in rain, salt air, wind and the swing between summer and winter. A heater that fails in its second season costs you a callback and a client.

- **Tungsten Electric** is rated IPX4 against splashing water.[5]
- **Platinum Smart-Heat Electric Marine** is built in AISI 316 marine-grade stainless steel, rated IPX5, and carries Lloyd's Register approval for marine use: the heater to specify within reach of the coast.[8]
- **Tungsten Coastal** and **Tungsten Select** are coming soon. Ask your Bromic contact before you specify them.
- **The Affinity On/Off controller** has an IP54 enclosure.[6]

Pole-mounted Tungsten heaters over high bar tables on a rooftop at night

**Warranty you can quote.** Bromic publishes its warranty by product line:[9]

| PRODUCT | WARRANTY |
|---|---|
| Platinum Smart-Heat Electric | 3 years |
| Platinum Smart-Heat Electric Marine | 5 years land-based; 3 years on vessels |
| Eclipse Smart-Heat Electric and Freestanding | 3 years |
| Tungsten Smart-Heat Electric | 2 years heater; 7 years elements |
| Affinity Smart-Heat controllers | 1 year |

Partners receive an additional year of warranty coverage on qualifying products (see the Partner Program below).[10] One manufacturer, one warranty process and one support line, rather than a different vendor for every part of the job.

Eclipse freestanding heater arcing over a sofa on a lakeside terrace

## 4. Stand out from the next contractor

Clients compare quotes, and most quotes look alike: a heater, a price, a date. Make yours the one they remember.

- **Send a heating plan with the quote.** A Bromic design plan shows where each heater goes and the space it warms. It turns a line item into a picture of the evening.[10]
- **Quote the complete system.** Heaters, controllers, wall switch and app set-up in one price. A heater without its controls is not a finished job, and the client finds out on the first cold night.

- **Offer the pre-wire on every patio.** Rough-in at framing costs far less than opening a finished soffit later, and it lets the owner add heat after they move in.
- **Talk about safety plainly.** Dedicated circuits, the right mounting height, outdoor-rated controls. Clients trust the contractor who explains why.
- **Show it working.** A heated patio at dusk sells the next one. Ask to photograph the finished job; Bromic partners can have projects featured (below).

Two Eclipse pendant heaters over an outdoor dining table at dusk

Whether your business is new homes, remodels, commercial fit-outs, smart-home installs or service work, outdoor heat is a line you can add to every job you already do.

Tungsten freestanding gas heater beside a poolside sofa

## The Bromic Partner Program

You create great outdoor spaces. We know how to heat them. Together, your clients enjoy them all season long.

The Bromic Partner Program gives trade professionals who specify, design, build or install outdoor spaces exclusive benefits and dedicated support.[10]

| BENEFIT | WHAT IT MEANS ON YOUR PROJECTS |
|---|---|
| **Exclusive partner pricing** | Trade pricing on Bromic heaters and controls. |
| **Expert product recommendations** | The right heater, wattage, voltage and controls for each space, from people who know the range. |
| **Free custom heating design plans** | Heater positions and coverage on your client's plan, with a parts and controls list to price from. |
| **Extended warranty** | An additional year of warranty coverage on qualifying products. |
| **Dedicated point of contact** | One named Bromic contact for your projects. |
| **Project coverage and marketing spotlights** | Finished projects can be featured in Bromic case studies and marketing. |

**Installer program.*** Partners who install Bromic heaters can also join the Bromic installer program.

**How to join.** Register your project and meet your Bromic rep at bromic.com/lp-builders, or call 1-800-301-1293.[107]

* A reseller certificate is required to join the Bromic installer program.

A hand holding a tablet to control the heat at an outdoor table

Join the Bromic Partner Program, register your next project, and we will send you a heating design plan for it.

NEXT STEP

Join the Bromic Partner Program



## Sources


1. **National Association of Home Builders (Eye on Housing)**, Share of new homes with patios dips to a six-year low (2026). https://eyeonhousing.org/2026/09/share-of-new-homes-with-patios-dips-to-a-six-year-low/

2. **National Association of Home Builders (Eye on Housing)**, Outdoor features, a laundry room among most wanted features (What Home Buyers Really Want, 2024 edition) (2024). https://eyeonhousing.org/2024/04/outdoor-features-a-laundry-room-among-most-wanted-features/
3. **Bromic Heating / Atomik Research**, Outdoor Living Trends 2026 (US Homeowner Survey) (2026)
4. **Bromic Heating**, The Official Outdoor Heating Planning Guide, US v1.2 (2021)
5. **Bromic Heating**, Tungsten Smart-Heat Electric product page (2026). https://www.bromic.com/product/tungsten-smart-heat-electric/
6. **Bromic Heating**, Affinity Smart-Heat controllers, manual wall switch and expansion board product pages (2026). https://www.bromic.com/product/affinity-smart-heat-on-off-controllers/
7. **Bromic Heating**, Lookbook 2026 (2026)
8. **Bromic Heating**, Platinum Smart-Heat Electric Marine product page (2026). https://www.bromic.com/product/platinum-smart-heat-electric-marine/
9. **Bromic Heating**, Warranty (2026). https://www.bromic.com/warranty/
10. **Bromic Heating**, The Bromic Partner Program (trade landing page) (2026). https://www.bromic.com/lp-builders/
11. **National Fire Protection Association**, NFPA 70, National Electrical Code (2026). https://www.nfpa.org/codes-and-standards/nfpa-70-standard-development/70

---

Confirm every installation with your local building authority and a licensed electrician or gas fitter. Wi-Fi and app features need compatible Affinity Smart-Heat controls, sold separately. © 2026 Bromic Heating · bromic.com