

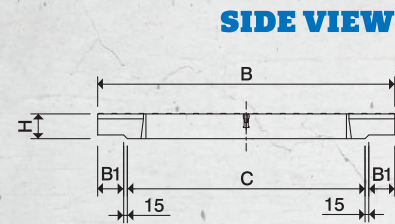
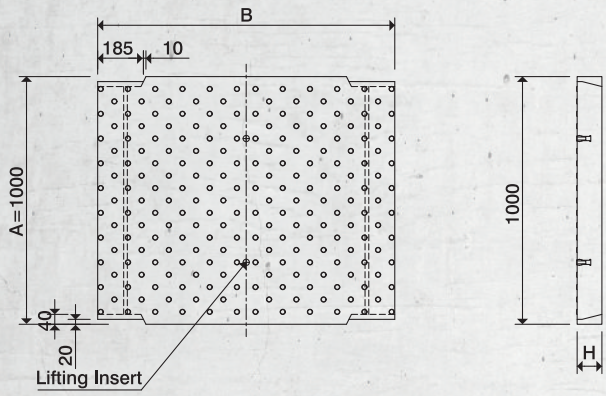


**TOP VIEW**  
Std. Lid for SWD

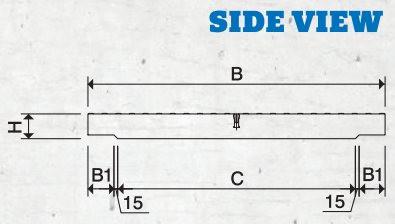

**TOP VIEW**  
No Hole Lid for Cable Duct

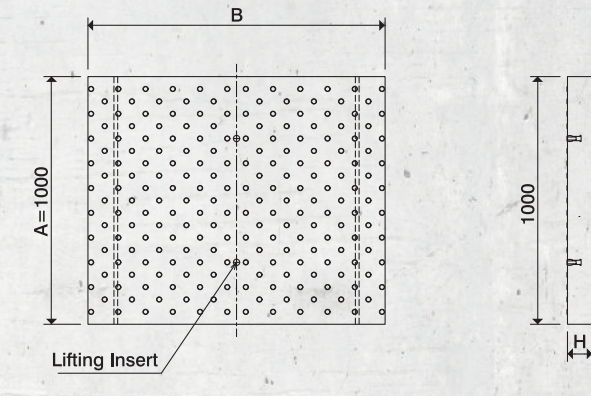

**LID FOR FT-FLUME**

H: 800 ~ 1600 (A: 1000)

FT-Flume Width (mm)	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
B	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200
C	560	660	760	860	960	1060	1160	1260	1360	1460	1560	1660	1760	1860	1960
H	100	100	100	100	100	100	100	100	130	130	130	130	130	130	130
B1	105	105	105	105	105	105	105	105	105	105	105	105	105	105	105

**LID FOR FT-FLUME**

H: 1800 (A: 1000)

FT-Flume Width (mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
B	1270	1370	1470	1570	1670	1770	1870	1970	2070	2170	2270
C	960	1060	1160	1260	1360	1460	1560	1660	1760	1860	1960
H	100	100	100	100	130	130	130	130	130	130	130
B1	140	140	140	140	140	140	140	140	140	140	140



**Head office:**  
FUJI Silvertch Concrete Pvt. Ltd.  
4th Floor, House No. 5  
Magnet Corporate Park  
Near Zydus Hospital, S. G. Highway  
Thaltej, Ahmedabad 380 054.  
Phone: +91 79 4021 0000  
Email: info@fujisilvertch.com  
Web: www.fujisilvertch.com

**Regional offices:**  
**Delhi-NCR, India**  
Level 18, One Horizon Center, Golf Course Road  
DLF Phase-5, Sector 43, Gurgaon 122 002.  
**Mumbai, India**  
309, H-2, Western Express Highway  
Nav Prabhat Society, Navpada, Vile Parle (E)  
Mumbai 400 057.  
**Vadodara, India**  
518, K-10 Grand, B/h Atlantis  
Sarabhai Campus, Alkapuri Road  
Vadodara, Gujarat 390 007.



Please scan the  
QR code on your  
smartphone to save  
the contact details

FS-IMS | SM | FM-02 Version 1.1

# PRECAST FT-FLUME






FT-FLUME




PRECAST FT-FLUME

High-strength precast reinforced cement concrete large size drains, manufactured with high-performance self-compacting concrete, as per Japanese Industrial Standards (JIS). Conforming to Indian standards, and capable of a wheel load of 1.8 kN/m² for pedestrian movement. Useful for applications such as storm water drains, canals and power and telecommunication cable ducts.


TYPICAL SECTION OF FT-FLUME AS OPEN STORM WATER DRAIN

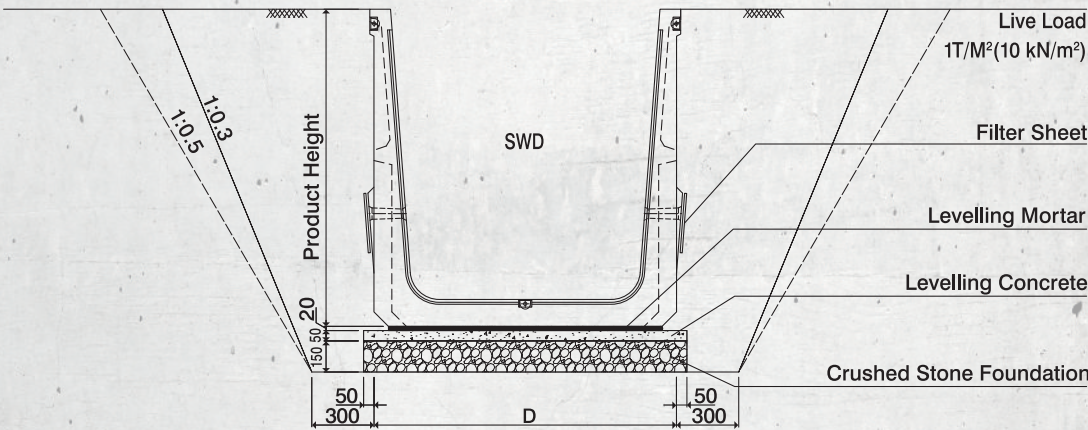


TYPICAL SECTION OF FT-FLUME AS CLOSED STORM WATER DRAIN / CABLE DUCT

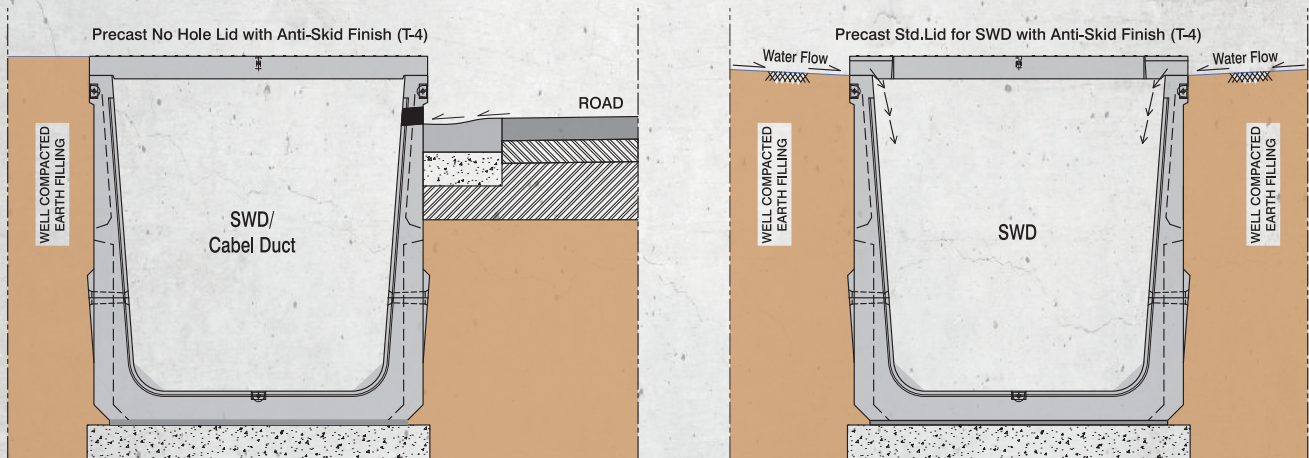

SECTION

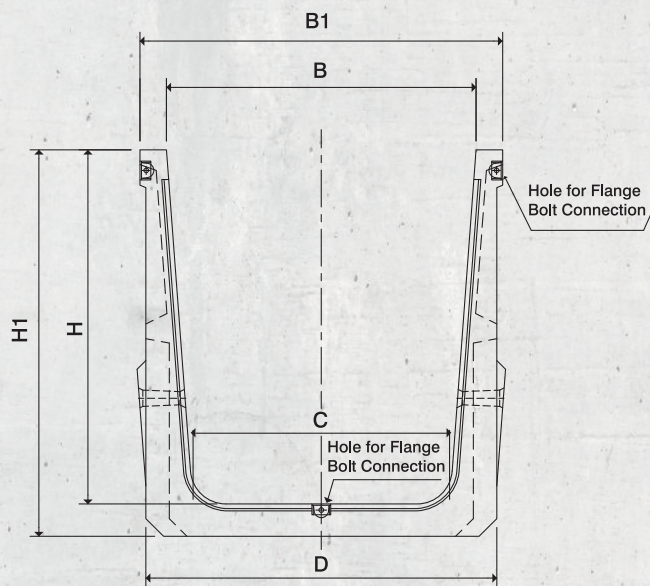

SIDE VIEW

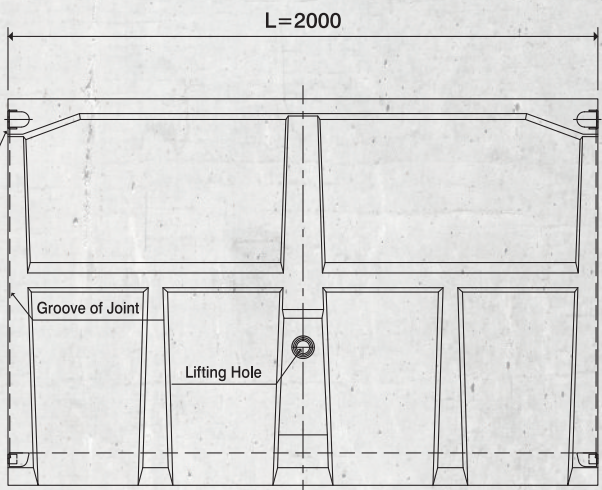

H: 800 (H1: 885)

Width: B	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
B1	960	1060	1160	1260	1360	1460	1560	1660	1760	1860	1960	2060	2160
C	680	780	880	980	1080	1180	1280	1380	1480	1580	1680	1780	1880
D	920	1020	1120	1220	1320	1420	1520	1620	1720	1820	1920	2020	2120

H: 900 (H1: 995)

Width: B	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800
B1	780	880	980	1080	1180	1280	1380	1480	1580	1680	1780	1880	1980
C	465	565	665	765	865	965	1065	1165	1265	1365	1465	1565	1665
D	740	840	940	1040	1140	1240	1340	1440	1540	1640	1740	1840	1940


H: 1000 (H1: 1105)

Width: B	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
B1	980	1080	1180	1280	1380	1480	1580	1680	1780	1880	1980	2080	2180
C	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850
D	940	1040	1140	1240	1340	1440	1540	1640	1740	1840	1940	2040	2140

H: 1200 (H1: 1310)


Width: B	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
B1	980	1080	1180	1280	1380	1480	1580	1680	1780	1880	1980	2080	2180
C	620	720	820	920	1020	1120	1220	1320	1420	1520	1620	1720	1820
D	940	1040	1140	1240	1340	1440	1540	1640	1740	1840	1940	2040	2140

TYPICAL CROSS SECTION OF SLOPE

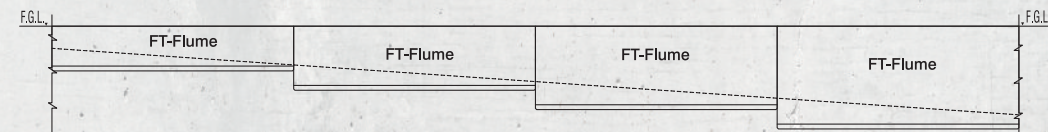

\*High depth FT-Flume can be used as silt chamber.

JOINT DETAILS



H: 1300 (H1: 1420)

Width: B	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
B1	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200
C	605	705	805	905	1005	1105	1205	1305	1405	1505	1605	1705	1805
D	960	1060	1160	1260	1360	1460	1560	1660	1760	1860	1960	2060	2160

H: 1400 (H1: 1530)

Width: B	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
B1	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200
C	590	690	790	890	990	1090	1190	1290	1390	1490	1590	1690	1790
D	960	1060	1160	1260	1360	1460	1560	1660	1760	1860	1960	2060	2160

H: 1500 (H1: 1640)

Width: B	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
B1	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200
C	575	675	775	875	975	1075	1175	1275	1375	1475	1575	1675	1775
D	960	1060	1160	1260	1360	1460	1560	1660	1760	1860	1960	2060	2160

H: 1600 (H1: 1740)

Width: B	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
B1	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200
C	560	660	760	860	960	1060	1160	1260	1360	1460	1560	1660	1760
D	960	1060	1160	1260	1360	1460	1560	1660	1760	1860	1960	2060	2160

H: 1800 (H1: 1970)

Width: B	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2500
B1	1170	1270	1370	1470	1570	1670	1770	1870	1970	2070	2170	2270	2770
C	630	730	830	930	1030	1130	1230	1330	1430	1530	1630	1730	2230
D	1090	1190	1290	1390	1490	1590	1690	1790	1890	1990	2090	2190	2690

All dimensions are in mm.