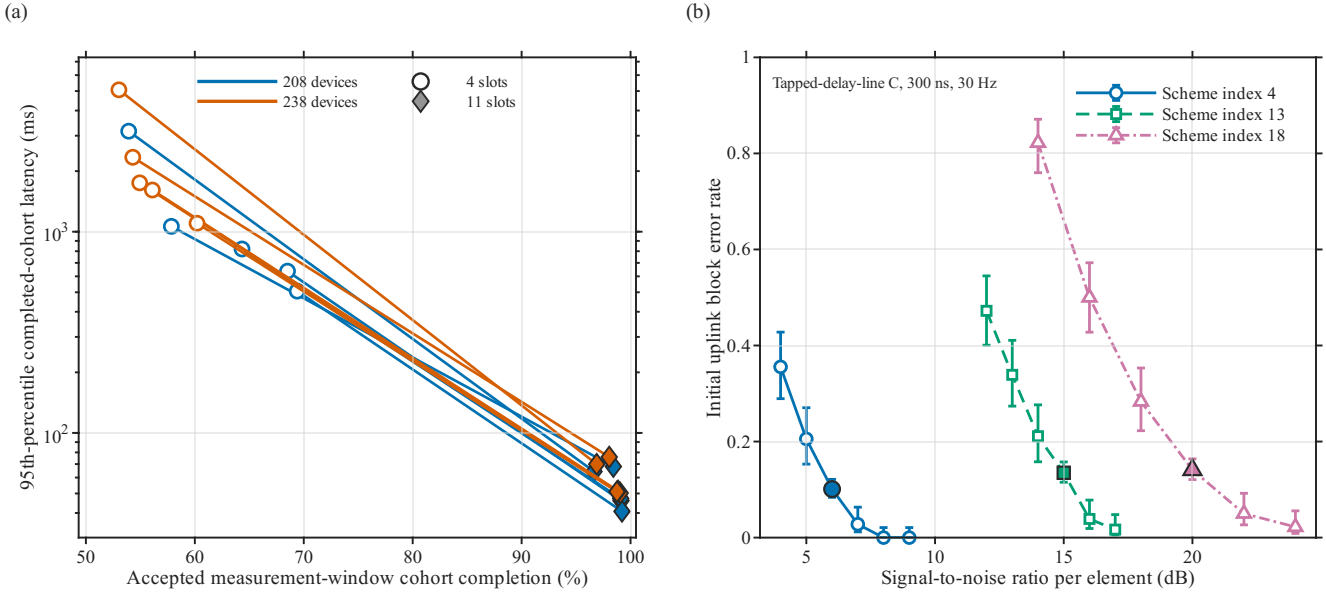
(a)
208 devices
238 devices
4 slots
11 slots
95th-percentile completed-cohort latency (ms)
10^3
10^2
50
60
70
80
90
100
Accepted measurement-window cohort completion (%)
(b)
Tapped-delay-line C, 300 ns, 30 Hz
Scheme index 4
Scheme index 13
Scheme index 18
Initial uplink block error rate
0
0.2
0.4
0.6
0.8
1
5
10
15
20
Signal-to-noise ratio per element (dB)