1. Magma simulation framework. Initialize with a random distribution of a pair of average concentration and internal energy $(\bar{c}, \bar{E})$.

2. A coupled partial melting Stokes-Darcy system. Strong form

$$
\begin{aligned}
\tilde{\mathbf{v}}_r + \frac{k_0 \phi_f^{1+\Theta}}{\mu_f} \nabla(\phi_f^{-1/2} \tilde{q}_f) &= 0 \\
\mu_s \phi_f^{-1/2} \nabla \cdot (\phi_f^{1+\Theta} \tilde{\mathbf{v}}_r) + \frac{1}{1-\phi_f}(\tilde{q}_f - \phi_f^{1/2} q) &= 0 \\
\nabla q - \nabla \cdot \hat{\sigma}(\mathbf{v}_s) &= -(1-\phi_f)\rho_r \mathbf{g} \\
\mu_s \nabla \cdot \mathbf{v}_s - \frac{\phi_f^{1/2}}{1-\phi_f}(\tilde{q}_f - \phi_f^{1/2} q) &= 0
\end{aligned}
\tag{2.1}
$$

List SI units
q = pascal.
$\mathbf{v}$ = m/s
Non dimensionalization choice

- $\check{\mathbf{v}} = \frac{\tilde{\mathbf{v}}_r}{k_0 \rho_r g_y / \mu_f}$
- $\check{q} = \frac{q}{\rho_r g_y l_0}$
- $\check{x} = \frac{x}{l_0}$
- $l_0 = (\frac{k_0 \mu_s}{\mu_f})^{1/2}$

The resulting non dimensionalized form is therefore

$$
\begin{aligned}
\check{\mathbf{v}}_r + \phi_f^{1+\Theta} \nabla(\phi_f^{-1/2} \check{q}_f) &= 0 \\
\phi_f^{-1/2} \nabla \cdot (\phi_f^{1+\Theta} \check{\mathbf{v}}_r) + \frac{1}{1-\phi_f}(\check{q}_f - \phi_f^{1/2} \check{q}) &= 0 \\
\nabla \check{q} - \nabla \cdot \hat{\sigma}(\check{\mathbf{v}}_s) &= -(1-\phi_f)\rho_r \hat{\mathbf{g}} \\
\nabla \cdot \check{\mathbf{v}}_s - \frac{\phi_f^{1/2}}{1-\phi_f}(\check{q}_f - \phi_f^{1/2} \check{q}) &= 0
\end{aligned}
\tag{2.2}
$$

scaled nondimensionalized weak form let $\check{\sigma} = \mathscr{D}\mathbf{v} - \frac{1}{3}\nabla \cdot \mathbf{v}\mathbf{I}$

$$
\begin{aligned}
(2\phi_s \check{\sigma}(\mathbf{v}_{s,h}), \nabla \Psi_s) - (\check{q}_h, \nabla \cdot \Psi_s) &= -(\phi_s \check{\mathbf{f}}, \Psi_s) \\
(\nabla \cdot \check{\mathbf{v}}_{s,h}, \omega) + \Big(\frac{\hat{\phi}_f}{\phi_s} \check{q}_h, \omega\Big) - \Big(\frac{\hat{\phi}_f^{1/2}}{\phi_s} \check{q}_{f,h}, \omega\Big) &= 0 \\
(\check{\mathbf{v}}_{r,h}, \Psi_r) - (\check{q}_{f,h}, \hat{\phi}_f^{-1/2} \nabla \cdot (\phi_f^{1+\Theta} \check{\mathbf{v}}_r)) &= 0 \\
(\hat{\phi}_f^{-1/2} \nabla \cdot (\phi_f^{1+\Theta} \check{\mathbf{v}}_r), \omega_f) + \Big(\frac{1}{\phi_s} \check{q}_{f,h}, \omega_f\Big) - \Big(\frac{\hat{\phi}_f^{1/2}}{\phi_s} \check{q}_h, \omega_f\Big) &= 0
\end{aligned}
\tag{2.3}
$$

2.1. Variational form and discretization.

2.1.1. Stokes and variational formulation.

$$
\begin{aligned}
-\Delta \mathbf{u} + \nabla p &= \mathbf{f} \\
\nabla \cdot \mathbf{u} &= 0
\end{aligned} \tag{2.4}
$$

weak form

$$
\begin{aligned}
(\nabla \mathbf{u}, \nabla \mathbf{v})_\Omega - (p, \nabla \cdot \mathbf{v})_\Omega &= (\mathbf{f}, \mathbf{v})_\Omega + < \tau^T \nabla \mathbf{u} \nu, \mathbf{v} \cdot \tau >_{\Gamma_i} \\
&\quad + < \nu^T \nabla \mathbf{u} \nu - p_0, \mathbf{v} \cdot \nu >_{\Gamma_i} - < \nabla \mathbf{u}_0, \nabla \mathbf{v} >_{\Gamma_u} \\
(\nabla \cdot \mathbf{u}, \omega) &= 0
\end{aligned} \tag{2.5}
$$

let stress $\mathbf{s} \cdot \tau = \tau^T \nabla \mathbf{u} \nu$ and $\mathbf{s} \cdot \nu = \nu^T \nabla \mathbf{u} \nu - p_0$, we have traction boundary condition term defined on Γ_i which is $< \mathbf{s}, \mathbf{v} >_{\Gamma_i}$. Traditionally a test space $\{\mathbf{v} \in H^1(\Omega) : \mathbf{v} = 0 \text{ on } \Gamma_u\}$ is employed here.

$$
\begin{aligned}
(\nabla \mathbf{u}_h, \nabla \mathbf{v}_h)_{\Omega_h} - (p_h, \nabla \cdot \mathbf{v}_h)_{\Omega_h} &= (\mathbf{f}, \mathbf{v}_h)_{\Omega_h} + < \mathbf{s}, \mathbf{v}_h >_{\Gamma_{i,h}} - < \nabla \mathbf{u}_{0,h}, \nabla \mathbf{v}_h >_{\Gamma_{u,h}} \\
(\nabla \cdot \mathbf{u}, \omega) &= 0
\end{aligned} \tag{2.6}
$$

We can separate normal and tangent part of stress on the boundary easily when physical boundary align with x-y axis. In the situation when a rectangular computational domain is used, we can mix stress and dirichlet boundary condition even further.

2.2. Darcy.

$$
\begin{aligned}
\mathbf{u} + \nabla p &= \mathbf{g} \\
\nabla \cdot \mathbf{u} &= 0
\end{aligned} \tag{2.7}
$$

weak form

$$
\begin{aligned}
(\mathbf{u}, \mathbf{v})_\Omega - (p, \nabla \cdot \mathbf{v})_\Omega &= (\mathbf{g}, \mathbf{v})_\Omega - < p_0, v_n >_{\Gamma_i} - < \mathbf{u}_0, \mathbf{v} >_{\Gamma_u} \\
(\nabla \cdot \mathbf{u}, \omega) &= 0
\end{aligned} \tag{2.8}
$$

Test space $\{\mathbf{v} \in H(\text{div}, \Omega) : v_n = 0 \text{ on } \Gamma_u\}$.

2.2.1. A degenerate Darcy test problem.

$$
\begin{aligned}
\mathbf{v} + \phi \nabla (\hat{\phi}^{-1/2} p) &= f \\
\hat{\phi}^{-1/2} \nabla \cdot (\phi \mathbf{v}) &= g
\end{aligned} \tag{2.9}
$$

We manufacture a solution with degenerate porosity in the target physical domain $x, y \in [-1, 1]$.

$$
\phi = \begin{cases} \cos^m(n(x^2+y^2)) & x^2+y^2 < \pi/2n \\ 0 & \text{otherwise} \end{cases} \tag{2.10}
$$

where m is an even number, and $\pi/2n < 1$ another choice of test case is shown as follows:

$$
\phi = \begin{cases} 0 & x \leq 0 \\ \phi_+ x^4 & x > 0 \end{cases} \tag{2.11}
$$

Define an arbitrary velocity and pressure

$$\begin{aligned}\mathbf{v} &= [\frac{x}{5}, -y]^T \\ p &= \hat{\phi}^{1/2}\end{aligned} \tag{2.12}$$

The source term is calculated as follows:

$$f = \mathbf{v} \tag{2.13}$$

and the divergence term is:

$$\begin{aligned}g &= \phi^{-1/2}\phi_+ \nabla \cdot [\frac{x^5}{5}, -x^4 y]^T \\ &= \phi^{-1/2}\phi_+ (x^4 - x^4) = 0\end{aligned} \tag{2.14}$$

a divergence free test case

2.2.2. Modified BR element. The Bernardi-Raugel element has been researched extensively in previous literature [2]. The error estimate is well known established by[4].

$$\|\mathbf{u}-\mathbf{u}\|_{1,\Omega}+\|p-p_h\|_{0,\Omega}\leq Ch^m(\|\mathbf{u}\|_{m+1,\Omega}+\|p\|_{m,\Omega}) \tag{2.15}$$

We state that our new function space satisfies the following hypotheses such that the error estimate holds:

- For any q in $H^m(\Omega)\cap L_0^2(\Omega)$, one has

$$\inf_{q_h\in\mathbf{M}_h}\|q-q_h\|_{0,\Omega}\leq Ch^m\|q\|_{m,\Omega}$$

- there exists a linear operator Π_h from $H^{m+1}(\Omega)^d\cap H_0^1(\Omega)^d$ into X_h such that

$$\forall\mathbf{v}\in H^{m+1}(\Omega)^d\cap H_0^1(\Omega)^d,\begin{cases}\forall q_h\in M_h,(q_h,\mathrm{div}(\mathbf{v}-\Pi_h\mathbf{v}))=0,\\ \qquad\qquad\|\mathbf{v}-\Pi_h\mathbf{v}\|\leq Ch^m\|\mathbf{v}\|_{m+1,\Omega}\end{cases}$$

- for each q_h in M_h, there exists a function $\mathbf{v}_h$ in X_h such that

$$(\mathrm{div}\mathbf{v}_h,q_h)\geq\beta\|q_h\|_{0,\Omega}\|\mathbf{v}\|_{1,\Omega}$$

  , where $\beta>0$ is a constant independent of h.

We introduce a family of quadrilateral mesh of domain Ω, bounded by h.

3. Linear system and Uzawa type algorithm. Boundary conditions are already included in the linear system formulation. Original linear system:

$$
\begin{bmatrix} \mathbf{A}_s & -\mathbf{B}_s & \mathbf{0} & \mathbf{0} \\ \mathbf{B}_s^T & \mathbf{C}_s & \mathbf{0} & \mathbf{K} \\ \mathbf{0} & \mathbf{0} & \mathbf{A}_d & -\mathbf{B}_d \\ \mathbf{0} & \mathbf{K} & \mathbf{B}_d^T & \mathbf{C}_d \end{bmatrix} \begin{bmatrix} \mathbf{x}_s \\ \mathbf{y}_s \\ \mathbf{x}_d \\ \mathbf{y}_d \end{bmatrix} = \begin{bmatrix} \mathbf{f}_s \\ \mathbf{g}_s \\ \mathbf{f}_d \\ \mathbf{g}_d \end{bmatrix} \tag{3.1}
$$

This is a double saddle point system. Symmetrically permutate original linear system and form a enlarged saddle point system.

$$
\begin{bmatrix} \mathbf{A}_s & \mathbf{0} & -\mathbf{B}_s & \mathbf{0} \\ \mathbf{0} & \mathbf{A}_d & \mathbf{0} & -\mathbf{B}_d \\ \mathbf{B}_s^T & \mathbf{0} & \mathbf{C}_s & \mathbf{K} \\ \mathbf{0} & \mathbf{B}_d^T & \mathbf{K} & \mathbf{C}_d \end{bmatrix} \begin{bmatrix} \mathbf{x}_s \\ \mathbf{x}_d \\ \mathbf{y}_s \\ \mathbf{y}_d \end{bmatrix} = \begin{bmatrix} \mathbf{f}_s \\ \mathbf{f}_d \\ \mathbf{g}_s \\ \mathbf{g}_d \end{bmatrix} \tag{3.2}
$$

(3.3)

$$
\mathbf{A} = \begin{bmatrix} \mathbf{A}_s & \mathbf{0} \\ \mathbf{0} & \mathbf{A}_d \end{bmatrix} \quad \mathbf{B} = \begin{bmatrix} -\mathbf{B}_s & \mathbf{0} \\ \mathbf{0} & -\mathbf{B}_d \end{bmatrix} \quad \mathbf{C} = \begin{bmatrix} -\mathbf{C}_s & -\mathbf{K} \\ -\mathbf{K} & -\mathbf{C}_d \end{bmatrix} \quad \mathbf{F} = \begin{bmatrix} \mathbf{f}_s \\ \mathbf{f}_d \end{bmatrix} \qquad \mathbf{G} = \begin{bmatrix} -\mathbf{g}_s \\ -\mathbf{g}_d \end{bmatrix}
$$

In this newly formed system, the $\mathbf{A}$ matrix maintains as a positive definite matrix. we solve this typical saddle point system with uzawa iteration. Uzawa algorithm has been discussed extensively at [3], [6].

Consider the linear system of equation:

$$
\begin{bmatrix} \mathbf{A} & \mathbf{B} \\ \mathbf{B}^T & \mathbf{C} \end{bmatrix} \begin{bmatrix} \mathbf{x} \\ \mathbf{y} \end{bmatrix} = \begin{bmatrix} \mathbf{F} \\ \mathbf{G} \end{bmatrix} \tag{3.4}
$$

Algorithm 3.1 Preconditioned Inexact Uzawa Iteration

1: Initialize $\mathbf{x}_0 = \mathbf{0}$ and $\mathbf{y}_0 = \mathbf{0}$
2: Update $\mathbf{x}_{i+1} = \mathbf{x}_i + \mathbf{A}^{-1}(\mathbf{F} - (\mathbf{A}\mathbf{x}_i + \mathbf{B}\mathbf{y}_i))$
3: Update $\mathbf{y}_{i+1} = \mathbf{y}_i + \mathbf{Q}^{-1}(\mathbf{B}^T\mathbf{x}_{i+1} + \mathbf{C}\mathbf{y}_i - \mathbf{G})$

In the previous literature [6], $\mathbf{Q}$ is approximated with $\tau\mathbf{I}$, which works well with the stokes part. However, it converges very slow with the same approximation when applied to the Darcy part. We need a better preconditioner approximating inverse of the corresponding schur complement. We use MINRES algorithm [1] due to schur complement being symmtetric and indefinite.

Algorithm 3.2 Preconditioned Inexact Uzawa Iteration

1: Initialize $\mathbf{x}_0 = \mathbf{0}$ and $\mathbf{y}_0 = \mathbf{0}$
2: Update $\mathbf{x}_{i+1} = \mathbf{x}_i + \mathbf{A}^{-1}(\mathbf{F} - (\mathbf{A}\mathbf{x}_i + \mathbf{B}\mathbf{y}_i))$
3: Obtain $\mathbf{r} = \mathbf{B}^T\mathbf{x}_{i+1} + \mathbf{C}\mathbf{y}_i - \mathbf{G}$
4: Obtain $\tilde{\mathbf{y}} = \text{argmin}_{\mathbf{x}\in V} ||(\mathbf{B}^T\mathbf{A}^{-1}\mathbf{B} - \mathbf{C})^{-1}\tilde{\mathbf{y}} - \mathbf{r}||$
5: Update $\mathbf{y}_{i+1} = \mathbf{y}_i + \tilde{\mathbf{y}}$

Based on the above algorithm, we proposed a new block preconditioner for our coupled linear system.

$$
\mathbf{Q}^{-1} = \begin{bmatrix} \mathbf{S}_s^{-1} & \mathbf{0} \\ \mathbf{0} & \mathbf{S}_d^{-1} \end{bmatrix} \tag{3.5}
$$

where the schur complement matrices are approximated with MINRES method.

3.1. Convergence and stability analysis. Uzawa iteration is in fact a fixed point iteration procedure. Usually, uzawa iteration convergences slowly.

3.1.1. Anderson acceleration. Accelerating uzawa iteration has been discussed in the previously literatures. Anderson acceleration (Anderson mixing) [8]

4. Test cases. We test the linear system a little bit different from the linear system above.

4.1. Constant porosity and balanced pressure (divergence free velocity field).

4.2. Const porosity and unbalanced pressure.

$$\check{q} = 0 \qquad \check{q}_f = 2(x+y) \qquad \check{\mathbf{v}}_r = -\frac{\phi_f^{-1/2}}{1-\phi_f}\begin{pmatrix} x^2 \\ y^2 \end{pmatrix} \qquad \check{\mathbf{v}}_s = \frac{\phi_f^{1/2}}{1-\phi_f}\begin{pmatrix} x^2 \\ y^2 \end{pmatrix} \tag{4.1}$$

$$\nabla \cdot \check{\mathbf{v}}_r = \frac{-2\phi_f^{-1/2}}{1-\phi_f}(x+y) \tag{4.2}$$

$$\mathscr{D}\check{\mathbf{v}}_s = \frac{2\phi_f^{1/2}}{1-\phi_f}\begin{bmatrix} x & 0 \\ 0 & y \end{bmatrix} \qquad (\nabla \cdot \check{\mathbf{v}}_s)\mathrm{I} = \frac{2\phi_f^{1/2}}{1-\phi_f}\begin{bmatrix} x+y & 0 \\ 0 & x+y \end{bmatrix} \tag{4.3}$$

$$\begin{aligned} \tilde{\mathbf{v}}_r + \phi_f^{1/2}\nabla\check{q}_f &= -\frac{\phi_f^{-1/2}}{1-\phi_f}\begin{pmatrix} x^2 \\ y^2 \end{pmatrix} + \phi_f^{1/2}\begin{pmatrix} 2 \\ 2 \end{pmatrix} \\ \phi_f^{1/2}\nabla \cdot (\check{\mathbf{v}}_r) + \frac{1}{1-\phi_f}\check{q}_f &= \frac{-2}{1-\phi_f}(x+y) + \frac{1}{1-\phi_f}2(x+y) = 0 \\ \nabla \cdot \check{\mathbf{v}}_s - \frac{\phi_f^{1/2}}{1-\phi_f}\check{q}_f &= \frac{2\phi_f^{1/2}}{1-\phi_f}(x+y) - \frac{2\phi_f^{1/2}}{1-\phi_f}(x+y) = 0 \\ -2(1-\phi_f)\nabla \cdot \sigma(\check{\mathbf{v}}_s) &= -2(1-\phi_f)\nabla \cdot (\mathscr{D}\check{\mathbf{v}}_s - \frac{1}{3}(\nabla \cdot \check{\mathbf{v}}_s)\mathrm{I}) = -\frac{8\phi_f^{1/2}}{3}\begin{pmatrix} 1 \\ 1 \end{pmatrix} \end{aligned} \tag{4.4}$$

5. Retrieve of physical variables. Eventually, we need to retrieve actual physicla values from nondimensionalized scaled variables. We need original velocity and pressure.

As stated above, the nondimensionalized scaled pressure potential $\check{q} = \frac{q}{\rho_r g_y l_0}$, hence $q = \rho_r g_y l_0 \check{q}$. The pressure potentials eliminated the effect of gravity, where $q_f = p_f - \rho_f g z$ and $q_s = p_s - \rho_f g z$. We can retrieve of original velocity with the similar manner $\tilde{\mathbf{v}} = \phi_f^{-\Theta}\mathbf{v}_r$. In the situation of $\Theta = 0$, the porosity scaled variable is the same as original variable.

6. Hyperbolic Equation System. In the simulatin of partial melting system, there arises multidimensional hyperbolic equations systems.

$$\mathbf{U}_t + \nabla\cdot[F(\mathbf{U}) - A(\mathbf{U}\nabla\mathbf{U})] = 0$$

$\mathbf{U}$ consists of two variables, average concentration of one species $\bar{c}_1$ and average total internal energy $\bar{E}$.

$$\bar{c}_t + \nabla\cdot(\mathbf{v}_e\bar{c} - \kappa D\nabla\bar{c}) = 0$$

The finite volume discretization can be written as:

$$empty$$

where $\kappa = \frac{\phi_f c_f}{\bar{c}}$ need definition on edge shared between two cells.



There are two κ values defined on both sides of the shared edge.

$$\kappa^{\pm} = \frac{\phi_f c_f^{\pm}}{\bar{c}^{\pm}}$$

where ϕ_f has definition on the edge.

Difficulties in solving transport system involving melting:

- Partial melting creates irregular porosity distribution. Need small stencils accounting for complex situation.

7. Problem setting. A scalar advection-diffusion problem without reaction.

$$u_t + \nabla\cdot(F(u) - D(u)\nabla u) = 0,\ \mathbf{x}\in\mathbb{R}^d \tag{7.1}$$

The variable $D(u)$ will be treated with Kirchhoff transformation. The diffusion coefficient D is treated as a constant here. This will not affect the following discussion on numerical scheme.

$$u_t + \nabla\cdot F(u) - D\triangle u = 0,\ \mathbf{x}\in\mathbb{R}^d \tag{7.2}$$

7.1. Finite volume scheme. Replace scalar u with cell averaged value

$$\bar{u} = \frac{1}{|E|}\int_E u(\mathbf{x},t)d\mathbf{x} \tag{7.3}$$

and Lax-Friedrichs numerical flux

$$f(u) = \frac{1}{2}[F(u^+) + F(u^-)\cdot\nu_E - \alpha(u^+ - u^-)] \tag{7.4}$$

The finite volume scheme of advection-diffusion problem is:

$$\bar{u}_t + \frac{1}{|E|}\int_{\partial E}(\hat{f}(\bar{u}) - \nabla\bar{u}\cdot\nu_E)d\sigma(\mathbf{x}) = 0 \tag{7.5}$$

In 2D quadrilateral logically rectangular mesh, we apply gaussian quadrature every edge as the approximation of integral of flux. I use Multi-level WENO reconstruction scheme to reconstruct the point value in advection numerical flux.

$$\hat{f}(u) = \frac{1}{2}[F(\mathscr{R}^+(\{\bar{u}\}_+)) + F(\mathscr{R}^-(\{\bar{u}\}_-)) \cdot \nu_E - \alpha(\mathscr{R}^+(\{\bar{u}\}_+) - \mathscr{R}^-(\{\bar{u}\}_-))] \tag{7.6}$$

Let $\{\bar{u}\}_+ = \{\bar{u}_i \mid i \in \text{WENO stencil} \quad I_+\}$. Diffusion flux is different from its advection counterpart. I reconstruct derivative across the edge by sampling along the normal direction.

8. Computation of Jacobian. Implicit method contains solving a non linear system and a linear subproblem. I write the general non linear system as:

$$\bar{u}_t + \mathscr{F}(\bar{u}) - \mathscr{G}(\bar{u}) = 0 \tag{8.1}$$

where $\mathscr{F}(\bar{u})$ represents advection part, and $\mathscr{G}(\bar{u})$ represents diffusion part. The semi discretized form is

$$\bar{u}^{n+1} - \bar{u}^n + \Delta t[\mathscr{F}(\bar{u}^{n+1}) - \mathscr{G}(\bar{u}^{n+1})] = 0 \tag{8.2}$$

There are many well-researched numerical methods that can be used to solve such non linear system.

8.1. ML-WENO reconstruction and derivatives. I use ML-WENO reconstruction scheme to reconstruct point values from cell-averaged value... I use two stage non linear weighting. The first stage is calculated as

$$\breve{\omega}_l = \frac{\omega_l}{(\sigma_l + \varepsilon h_0^2)^{\eta_l}} \quad \eta_l = \begin{cases} 1, & \text{if } r = 1 \\ 3, & \text{if } r = 2 \\ 4, & \text{if } r \geq 3 \end{cases} \tag{8.3}$$

$$\bar{\omega}_l = \frac{\breve{\omega}_l}{\sum_k \breve{\omega}_k} \tag{8.4}$$

The the second stage is calculated based on first stage:

$$\hat{\omega}_l = \frac{\bar{\omega}_l}{(\sigma_l + \varepsilon h_0^2)^{sr_l}} \tag{8.5}$$

$$\tilde{\omega}_l = \frac{\hat{\omega}_l}{\sum_k \hat{\omega}_k} \tag{8.6}$$

The reconstruction is expressed as the weighted linear combination of stencil polynomials.

$$\mathscr{R}(\mathbf{x}) = \sum_{l \in L} P_l(\mathbf{x}) \tilde{\omega}_l(\bar{u}) \tag{8.7}$$

Suppose the reconstruction happens in a given stencil I. The cell averaged values $\bar{u}$ in this stencil is represented as $\{\bar{u}_s\}_{s \in S}$. The derivative of this reconstruction with respect to $\bar{u}_s$ is:

$$\frac{\partial \mathscr{R}}{\partial \bar{u}_s} = \sum_{l \in L} \left(\frac{\partial P_l}{\partial \bar{u}_s} \tilde{\omega}_l + P_l \frac{\partial \tilde{\omega}_l}{\partial \bar{u}_s} \right) \tag{8.8}$$

It consists of two parts, derivative of stencil polynomials $\frac{\partial P_l}{\partial \bar{u}_s}$ and derivative of non linear weights $\frac{\partial \tilde{\omega}_l}{\partial \bar{u}_s}$. The stencil polynomial is a combination of single polynomials satisfying

$$\frac{1}{|E_k|}\int_{E_k} p_s(\mathbf{x})d\mathbf{x} = \begin{cases} 1 & s = k \\ 0 & s \neq k \end{cases} \tag{8.9}$$

I use tensorproduct polynomials for logically rectangular mesh. The tensorporduct polynomial is written in the following form. Coefficients c_α are determined by solving a linear system satisfying (8.9).

$$p_s = \sum_{i<I} a_i^s (\frac{x - x_S}{h_S})^i \sum_{j<J} b_j^s (\frac{y - y_S}{h_S})^j = \sum_{|\alpha| \leq (I-1)\times(J-1)} \tilde{c}_\alpha^s \Big(\frac{\mathbf{x} - \mathbf{x}_S}{h_S}\Big)^\alpha \tag{8.10}$$

The stencil polynomial is expressed in terms of a combination of all these polynomials.

$$P_l(\mathbf{x}) = \sum_{s\in S} p_s^l(\mathbf{x})\bar{u}_s \tag{8.11}$$

Combining cell averaged values $\bar{u}_s$ with coefficients

$$c_\alpha = \sum_{s\in S} \tilde{c}_\alpha^s \bar{u}_s \tag{8.12}$$

The derivative of polynomial is straightforward. The derivative of non linear weight is a little more complicated. Equation 8.8 can be rewritten as:

$$\frac{\partial \mathscr{R}}{\partial \bar{u}_s} = \sum_{l\in L} p_s^l(\mathbf{x})\tilde{\omega}_l + \sum_{l\in L} P_l \frac{\partial \tilde{\omega}_l}{\partial \bar{u}_s} \tag{8.13}$$

The derivatives of non linear weights are:

$$\begin{aligned}
\frac{\partial \tilde{\omega}_l}{\partial \bar{u}_s} &= \frac{\hat{\omega}_{l,s}}{\sum_k \hat{\omega}_k} - \frac{\hat{\omega}_l \sum_k \hat{\omega}_{k,s}}{(\sum_k \hat{\omega}_k)^2} \\
\frac{\partial \hat{\omega}_l}{\partial \bar{u}_s} &= \frac{\bar{\omega}_{l,s}}{(\sigma_l + \varepsilon h_0^2)^{sr_l}} - sr_l \frac{\bar{\omega}_l \sigma_{l,s}}{(\sigma_l + \varepsilon h_0^2)^{sr_l+1}} \\
\frac{\partial \bar{\omega}_l}{\partial \bar{u}_s} &= \frac{\hat{\omega}_{l,s}}{\sum_k \hat{\omega}_k} - \frac{\check{\omega}_l \sum_k \check{\omega}_{k,s}}{(\sum_k \check{\omega}_k)^2} \\
\frac{\partial \check{\omega}_l}{\partial \bar{u}_s} &= -\eta_l \sigma_{l,s} \frac{\omega_l}{(\sigma_l + \varepsilon h_0^2)^{\eta_l+1}}
\end{aligned} \tag{8.14}$$

We calculate the derivatives of non linear weights with chain rule. We also need the derivative of smoothness indicator. The Jiang-Shu smoothness indicator is:

$$\sigma_{JS} = \sum_{0<|\beta|<r} \frac{h_0^{2|\beta|}}{|E_0|} \int_{E_0} \Big(\sum_{|\alpha|<r} c_\alpha \mathscr{D}^\beta \Big(\frac{\mathbf{x} - \mathbf{x}_S}{h_S}\Big)^\alpha\Big)^2 d\mathbf{x} \tag{8.15}$$

where order $r = (I-1)\times(J-1)$, a constant determined by the size of stencil. We present an approximation of the Jiang-Shu smoothness indicator (cite ....) by omitting all corss product terms.

$$\begin{aligned}
\tilde{\sigma}_P &= \sum_{0<|\alpha|<r} \sum_{0<\beta\leq\alpha} \Big(\frac{h_0}{h_S}\Big)^{2|\beta|} c_\alpha^2 \Big(\frac{\alpha!}{(\alpha-\beta)!}\Big)^2 \frac{1}{E_0} \int_{E_0} \Big(\frac{\mathbf{x} - \mathbf{x}_S}{h_S}\Big)^{2(\alpha-\beta)} d\mathbf{x} \\
&= \sum_{0<|\alpha|<r} \sum_{0<\beta\leq\alpha} \mathscr{C}(\alpha,\beta) c_\alpha^2
\end{aligned} \tag{8.16}$$

the derivative of $\tilde{\sigma}_P$ can be written as:

$$
\begin{aligned}
\frac{\partial \tilde{\sigma}_P}{\partial \bar{u}_s} &= \sum_{0<|\alpha|<r}\sum_{0<\beta\leq\alpha} \mathscr{C}(\alpha,\beta) 2c_\alpha \frac{\partial c_\alpha}{\partial \bar{u}_s} \\
\frac{\partial c_\alpha}{\partial \bar{u}_s} &= \tilde{c}^s_\alpha
\end{aligned} \tag{8.17}
$$

8.2. Derivative of flux. Implicit method requires calculation of derivatives of both advection and diffusion flux.

8.2.1. Derivative of advection flux. Differentiate equation 7.6 is straight forward.

$$
\begin{aligned}
\frac{\partial \hat{f}(u)}{\partial \bar{u}_s} &= \frac{1}{2}\Big[\Big(\frac{\partial \mathscr{R}^+}{\partial \bar{u}_s} + \frac{\partial \mathscr{R}^-}{\partial \bar{u}_s}\Big)\frac{\partial F}{\partial \bar{u}_s}\cdot \nu_E - \alpha\Big(\frac{\partial \mathscr{R}^+}{\partial \bar{u}_s} - \frac{\partial \mathscr{R}^-}{\partial \bar{u}_s}\Big)\Big] \\
&= \frac{1}{2}\Big[\frac{\partial \mathscr{R}^+}{\partial \bar{u}_s}\Big(\frac{\partial F}{\partial \bar{u}_s}\cdot \nu_E - \alpha\Big) + \frac{\partial \mathscr{R}^-}{\partial \bar{u}_s}\Big(\frac{\partial F}{\partial \bar{u}_s}\cdot \nu_E + \alpha\Big)\Big]
\end{aligned} \tag{8.18}
$$

8.2.2. Derivative of diffusion flux.

9. Implicit time stepping.

9.1. Backward Euler.

9.2. Implicit SSP time stepping.

10. Parallelism. Parallel solver is inevitable in large scale computation. We talk about mesh partitioning strategy acorss different processors in the following sections.

10.1. Logically rectangular mesh and stencils. Cells in logically rectangular mesh maintains logical order. Logically rectangular mesh shows more flexibility in some computation scenerios than cartesian mesh. Figure 10.1 shows a full view of a logically rectangular (quadrilateral) mesh. Counting all stencils without repeating is convenient in the logically rectangular mesh setting. We use the index of bottom left cell as the index of the corresponding stencil. A $\mathrm{M}\times\mathrm{N}$ mesh will then contain $(\mathrm{M}-\mathrm{I}+1)\times(\mathrm{N}-\mathrm{J}+1)$ stencils of size $\mathrm{I}\times\mathrm{J}$.



Fig. 10.1. Logically rectangular mesh displayed in full. The index of a stencil (colored cells) is the same as the index of the red cell.



Fig. 10.2. Two sample stencils used by cell $E_{i,j}$. The index of these two stencils are $S_{i-2,j}$ and $S_{i,j-2}$. Consistent with the index of bottom left cell.

10.2. Mesh partition. I examine the following partition of mesh without lossing generality. The dashed line indicates ghost cells distributed by MPI communication. The size of ghost layer is determined by the largest stencil size required for cells in the ghost layer.



Fig. 10.3. Illustration of mesh partition. Ghost cells are drawn with dashed lines. The size of ghost layer is determined by the number of cells need in the time stepping computation.

Increasing the order of reconstruction (increasing the size of corresponding stencil) will thus increase the communication cost. However, the distribution of mesh only occur once in the beginning of the computation. Mesh will not change during the process of compuation. Figure 10.3 shows a stencil covers ghost layer.

10.3. Sparsity pattern of Jacobian matrix.

10.4. Optimal preconditioner.

- 1. Incomplete LU decomposition
- 2. Additive schwarz

10.5. Scalability.

11. Eutectic phase behavior. Mid-ocean ridge forms at the place where temperature is generally lower. The binary eutectic phase behavior describes the chemical behavior of two immiscible crystals from a completely miscible solution.

On a typical eutectic phase behavior diagram, we can locate any phase situation using temperature and composition information. We follows phase behaviors details described in [7]. We made some reasonable adjustments for our mantle system.

There are few key elements that allow practical calculation of phase region and corresponding volumetric fractions.

- Fluid formed by eutectic melting has a constant composition of opx denoted as X_e. The eutectic composition can be related to pressure and denoted as $X_e(P)$.
- Melting temperature relates to pressure. Decompression melting is accounted for in our model by relating eutectic melting temperature with pressure change.
- Eutectic melting is of the most insterest. The temperature where eutectic melting happens has much lower temperature then actual melting temperature.

We define following dimensionless bulk variables following [7]. We denote volumetric fraction of three phases as olivine ϕ_1, opx ϕ_2 and melt ϕ_f. We are tracking opx in the mixture for simulation. Stefan number is defined as the ratio of the sensible heat to latent heat, Ste $= \frac{c_p \Delta T}{L}$. We define dimensionless temperature with eutectic temperature as $\mathcal{T} = \frac{T-T_e}{T_{\text{MAX}-T_e}}$, and dimensionless pressure as $\mathcal{P} = \frac{P-P_0}{P_0}$, where P_0 represents standard atmospheric pressure. We use melting temperature of olivine at standard atmospheric pressure as 2053 K, and 1753 K for orthopyroxene (opx). Olivine has density range of 3.2 to 4.3 g/cm^3 and orthopyroxene has similiar density ranging from 3.2 to 4 g/cm^3. We define a dimensionless composition $\chi_i = \frac{X}{X_e}$ where $i \in \{1,2,f\}$ and bulk composition defined as $\chi = \sum \phi_i \chi_i$. The eutectic melting composition is now normalized as $\chi_e = X_e/X_e = 1$.

$$
\begin{aligned}
C &= \phi_2 \rho_2 + \phi_f \rho_f \chi_f(\mathcal{T},\mathcal{P}) \\
H &= \phi_1 \rho_1 c_{p,1} \mathcal{T} + \phi_2 \rho_2 c_{p,2} \mathcal{T} + \phi_f \rho_f \left(L_f + c_{p,f} \mathcal{T}\right)
\end{aligned} \tag{11.1}
$$

Where the melting latent heat can be affected by multiple things. We can approximate the latent heat of the mixture as

$$L_f = L_1(1-\chi_f(\mathcal{T},\mathcal{P})) + L_2 \chi_f(\mathcal{T},\mathcal{P})$$

. We can nondimensionalize bulk composition and dimensionless bulk enthalpy as:

$$
\begin{aligned}
\mathcal{C} &= C/\rho_1 \\
\mathcal{H} &= H/(c_{p,1}\rho_1)
\end{aligned} \tag{11.2}
$$

We denote nondimensionalized density and specific heat as $\rho_{i,j}$ and $c_{p,i,j}$.

The eutectic phase diagram can be simplified as:



11.1. Primary phase split. In mantle, we mostly have olivine and orthopyroxene (opx) mixture in the rock. Like eutectic melting system e.g. salt and ice, the presence of one phase would largely lower the melting temperature of another phase to the eutectic melting point. We now decompose different phase regions in details We are tracking bulk concentration of orthopyroxene (opx) in our calculation. We identify following 6 regions with different phase assemblages:

I Single-phase sub-solidus : olivine
II Two-phase sub-solidus: olivine + opx
III Three-phase eutectic: olivine + opx + melt
IV Two-phase super-eutectic : olivine + melt
V Two-phase super-eutectic : opx + melt
VI Single-phase super-liquidus : melt

11.1.1. Region I. Pure olivine. The conditions to be in region I are

$$\mathscr{C} = 0 \quad \mathscr{H} \le 1 \tag{11.3}$$

Hence, the volumetric fraction and temperature can be calculated simply as:

$$\phi_1 = 1, \quad \phi_2 = \phi_f = 0 \quad \text{and} \quad \mathscr{T} = \mathscr{H} \tag{11.4}$$

11.1.2. Region II. Two-phase sub-solidus: olivine + opx. In this phase region, temperature hasn't reached eutectic melting temperature.

$$\phi_2 = \frac{\mathscr{C}}{\rho_{2,1}} \quad \phi_1 = 1 - \phi_2 \quad \phi_f = 0 \quad \text{and} \quad \mathscr{T} = \frac{\mathscr{H}}{\phi_1 + \phi_2 \rho_{2,1} c_{p,2,1}} < 0 \tag{11.5}$$

11.1.3. Region III. In this three-phase eutectic region, all three phases are present. The temperature is fixed at the eutectic point. This is the exact eutectic point where solid phase opx hasn't been exausted. In this phase region, temperature is exactly at the eutectic temperature,

$$\phi_f = \frac{\mathscr{H}}{L\rho_{f,1}} \quad \phi_2 = \frac{\mathscr{C} - \phi_f \rho_{f,1} \chi_e}{\rho_{2,1}} \quad \phi_1 = 1 - \phi_f - \phi_2 \quad \text{and} \quad \mathscr{T} = 0 \tag{11.6}$$

In this region, density of melt is fixed as eutectic density $\rho_f = \rho_e$.

11.1.4. Region IV. In this region, melting starts at the point left to the eutectic melting point. This is the melting happening in upper mantle. In this phase region, opx has exausted in solid matrix and temperature keeps rising. As more olivine melting, the density of melting changes.

$$\phi_2 = 0 \tag{11.7}$$

11.1.5. Region V. In this region, melting starts at the point right to the eutectic melting point. We are not investigate too much in this type of melting.

11.1.6. Region VI. In this region, only melting is present. Hence the volume fraction is given:

$$\phi_1 = \phi_2 = 0, \quad \phi_f = 1 \tag{11.8}$$

11.2. Further approximation and simplified phase split. To further simplify my calculation of phase diagram, I propose following approximations:

- We approximate both olivine and orthopyroxene with one uniform constant density.

- Heat capacity has a complex dependency on temperature, pressure and mixture. We assume the same specific heat capacity under circumstance of mantle melting.
- Ignore both thermal expansion and density change upon phase transition.
- Assume olivine and orthopyroxene share one same constant latent heat $L_1 = L_2 = L$.
- liquid and solid density ....

Under such assumption, we can get a much simplified concentration and bulk enthalpy:

$$
\begin{aligned}
\mathscr{C} &= \phi_2 + \phi_f \chi_f(\mathscr{T}, \mathscr{P}) \\
\mathscr{H} &= (\phi_1 + \phi_2 + \phi_f)\mathscr{T} + \phi_f L_f \\
&= \mathscr{T} + \phi_f L
\end{aligned}
\tag{11.9}
$$

11.2.1. Phase diagrams. In practical, we are focusing on eutectic melting happening when mass fraction of opx is left to eutectic point. We notice that upper mantle consists of more than 80% of olivine according to[9]. Hence, we only need to restrict our calculation to the left side of eutectic point.

We can also plot a $\mathscr{H} - \chi$ diagram based on the $\mathscr{T} - \chi$ plot above.





More importantly, we need $\mathscr{H} - \mathscr{C}$ phase diagram. Now we calculate the line b separate region III (eutectic melting) and region IV (super-eutectic melting). Along line b, all opx has been exhausted and eutectic melting has stopped, hence $\phi_2 = 0$. The resulting $\mathscr{C} = \phi_f \chi_f$. According to our assumption of homogenous density, at the solidus region, we have the following relationship: $\chi = \frac{\phi_2}{\phi_2 + \phi_1} = \frac{M_2}{M_1 + M_2}$. Therefore, when all opx exhausted $\phi_2 = 0$, $\phi_f = X/X_e = \chi$. Along this line b, $\chi_f = \chi_e = 1$ is a constant for the fact that all the melting are eutectic melting. Hence along line b, we have

$$
\mathscr{C} = \chi \tag{11.10}
$$

Now let's turn to another line c separating region IV (super-eutectic melting) and region VI (super-liquidius region). On this line c, all solid has molten $\phi_f = 1$. The resulting $\mathscr{C} = \chi_f = \chi$. Hence the final $\mathscr{H} - \mathscr{C}$ diagram is:



11.2.2. Region II. Two-phase sub-solidus: olivine + opx. The conditions to be in region II are:

$$\mathscr{H} < 0 \tag{11.11}$$

In this phase region, temperature hasn't reached eutectic melting temperature.

$$\phi_2 = \mathscr{C} \quad \phi_1 = 1 - \phi_2 \quad \phi_f = 0 \quad \text{and} \quad \mathscr{T} = \frac{\mathscr{H}}{\phi_1 + \phi_2} = \mathscr{H} < 0 \tag{11.12}$$

11.2.3. Region III. In this three-phase eutectic region, all three phases are present. In this phase region, temperature is exactly at the eutectic temperature,

$$\phi_f = \frac{\mathscr{H}}{L} \quad \phi_2 = \mathscr{C} - \phi_f \chi_f(\mathscr{T}, \mathscr{P}) \quad \phi_1 = 1 - \phi_f - \phi_2 \quad \text{and} \quad \mathscr{T} = 0 \tag{11.13}$$

Where $\chi_f(\mathscr{T}, \mathscr{P}) = \chi_e(\mathscr{P})$, all melting is eutectic melting. Mass fraction is fixed as eutectic mass fraction.

11.2.4. Region IV. In this super-eutectic two-phase region, opx has been exhausted in eutectic melting. The volumetric fractions can be determined as:

$$\phi_2 = 0 \quad \phi_f = \frac{\mathscr{C}}{\chi_f(\mathscr{T}, \mathscr{P})} \tag{11.14}$$

The corresponding temperature should be determined by solving the following equation.

$$F(\mathscr{T}) = \mathscr{H} - \mathscr{T} - \frac{\mathscr{C}}{\chi_f(\mathscr{T}, \mathscr{P})} L = 0 \tag{11.15}$$

Simple Newton method can be applied to solve this equation if we apply nonlinear $\chi_f - \mathscr{T}$ relationship. If we use simple linear relationship between mass fraction and temperature as $\chi_f = \chi_e(1 - \mathscr{T})$, we can obtain a simple quadratic equation:

$$\begin{aligned} &(\mathscr{T}_m - \mathscr{T})\mathscr{H} - (\mathscr{T}_m - \mathscr{T})\mathscr{T} - \mathscr{C}L/\chi_e(\mathscr{P}) = 0 \\ &\mathscr{T}^2 - (\mathscr{H} + \mathscr{T}_m)\mathscr{T} + \mathscr{T}_m\mathscr{H} - \mathscr{C}L/\chi_e(\mathscr{P}) = 0 \end{aligned} \tag{11.16}$$

11.2.5. Region VI. In this single phase super-liquidus region, we can get volume fractions and temperature easily as:

$$\phi_1 = \phi_2 = 0 \quad \phi_f = 1 \quad \text{and} \quad \mathscr{T} = \mathscr{H} - L \tag{11.17}$$

11.3. Pressure and melting point. Now I take pressure change into account. In general, the higher the pressure, the higher the eutectic melting point. With Clapeyron constant of the value $\gamma = 10^{-7}\text{KPa}^{-1}$ We assume a simple linear relationship between pressure and eutectic melting point.

$$T_e(p) = T_e + \gamma p = T_e + \gamma p$$

If pressure is replaced with lithostatic pressure, we can relate eutectic melting point with depth.

$$T_e(p) = T_e + \gamma p = T_e + \gamma \rho g z$$

An nondimensionlized version can be derived directly by substituting T with $\mathscr{T}(T_1 - T_e) + T_e$.

$$\mathscr{T}_e(z) = \frac{\gamma \rho g}{T_1 - T_e} z \tag{11.18}$$

We can plot volumetric fraction and temperature distribution against dimensionless enthalpy and composition as following:





And the phase diagram taking pressure effect into account is displayed as following:



11.4. Modified phase behavior. Boussinesq approximation approximates phase density with constant densities but buoyancy terms are left alone. The density difference is essential in compaction. This time we keep the difference in liquid and solid density, stating $\rho_s \neq \rho_f$. We still nondimensionalize in the similar way:

$$
\begin{aligned}
\mathscr{C} &= \phi_2 + \frac{\rho_f}{\rho_s}\phi_f \chi_f \\
\mathscr{H} &= (\phi_1+\phi_2)\mathscr{T} + \phi_f \mathscr{T} + \phi_f L_f \\
&= (1-\phi_f)\mathscr{T} + \frac{\rho_f}{\rho_s}\phi_f(\frac{L}{c_p}+\mathscr{T}) \\
&= [1-(1-\frac{\rho_f}{\rho_s})\phi_f]\mathscr{T} + \frac{\rho_f}{\rho_s}\phi_f \mathscr{L}
\end{aligned}
\tag{11.19}
$$

We then separate phase regions similarly.

11.4.1. Region I. Single phase solidus region: olivine. This condition was not affected since no liquid presents.

11.4.2. Region II. Two-phase sub-solidus: olivine + opx. This region was not affected by differentiate liquid and solid densities since no liquid presents in this region.

11.4.3. Region III. This is three phase eutectic region, all three phases are present. In this phase region, temperature is fixed at the eutectic temperature, where the dimensionless temperature is 0.

$$
\phi_f = \frac{\rho_s}{\rho_f}\frac{\mathscr{H}}{L} \quad \phi_2 = \mathscr{C} - \frac{\rho_f}{\rho_s}\phi_f \chi_f(\mathscr{T},\mathscr{P}) = \mathscr{C} - \frac{\mathscr{H}}{L} \quad \phi_1 = 1-\phi_f-\phi_2 \quad \text{and} \quad \mathscr{T}=0
\tag{11.20}
$$

Where $\chi_f(\mathscr{T},\mathscr{P}) = \chi_e(\mathscr{P})$, all melting is eutectic melting. Mass fraction is fixed as eutectic mass fraction.

11.4.4. Region IV. In this super-eutectic two-phase region, opx has been exhausted in eutectic melting. The volumetric fractions can be determined as:

$$
\phi_2 = 0 \quad \phi_f = \frac{\rho_s}{\rho_f}\frac{\mathscr{C}}{\chi_f(\mathscr{T},\mathscr{P})}
\tag{11.21}
$$

The original quadratic equation has now been altered as:

$$
F(\mathscr{T}) = \mathscr{H} - [1-(1-\frac{\rho_f}{\rho_s})\frac{\rho_s}{\rho_f}\frac{\mathscr{C}}{\chi_f}]\mathscr{T} - \frac{\mathscr{C}}{\chi_f(\mathscr{T},\mathscr{P})}L = 0
\tag{11.22}
$$

We use simple linear relationship between mass fraction and temperature as $\chi_f = \chi_e(\mathscr{T}_m - \mathscr{T})$.

$$
\mathscr{T}^2 - (\mathscr{H} + \mathscr{T}_m - (1-\frac{\rho_f}{\rho_s})\frac{\rho_s}{\rho_f}\frac{\mathscr{C}}{\chi_e})\mathscr{T} + \mathscr{T}_m\mathscr{H} - \frac{\mathscr{C}L}{\chi_e} = 0
\tag{11.23}
$$

11.4.5. Region VI. In this single phase super-liquidus region, we can get volume fractions and temperature as usual:

$$
\phi_1 = \phi_2 = 0 \quad \phi_f = 1 \quad \text{and} \quad \mathscr{T} = \frac{\rho_s}{\rho_f}\mathscr{H} - L
\tag{11.24}
$$

12. Magma migration. For our very first simulation, we would like to simulate the production of magma in a simplified controlled scenerio. I was inspired by the setup described previously in[5]. The simulation will be setup in a chunk of rock ascending with constant upwelling velocity. A linear adiabatic temperature profile is applied here. A linear intial rock composition is also applied here.

12.1. Mathematical model. We are going to show our coupled darcy-stokes semi-degenerate model can solve this problem well. In[5], matrix creeping (Stokes equation) did not directly involved in the simulation due to the fact that boundary condition restricts a constant background upwelling ascending velocity. The solid matrix pressure is therefore strictly lithostatic pressure relating only to depth. In[5], only energy transports while concentration does not participate in transport phenomenon.

$$
\begin{aligned}
\check{\mathbf{v}}_r + \phi_f^{1+\Theta}\nabla(\phi_f^{-1/2}\check{q}_f) &= 0 \\
\phi_f^{-1/2}\nabla\cdot(\phi_f^{1+\Theta}\check{\mathbf{v}}_r) + \frac{1}{1-\phi_f}(\check{q}_f - \phi_f^{1/2}\check{q}) &= 0 \\
\nabla\check{q} - \nabla\cdot\hat{\sigma}(\check{\mathbf{v}}_s) &= -(1-\phi_f)\hat{\mathbf{g}} \\
\nabla\cdot\check{\mathbf{v}}_s - \frac{\phi_f^{1/2}}{1-\phi_f}(\check{q}_f - \phi_f^{1/2}\check{q}) &= 0
\end{aligned}
\tag{12.1}
$$

For simplification, we won't include diffusion into our transport model. We drop the diffusion term here for the fact that diffusion coefficient is relatively small compared to convective phenomenon. On the other hand, eutectic melting has a constant concentration such that gradient of concentration is of zero value. Hence the transport of component 2 (opx) can be expressed in terms of mixture theory as:

$$
\begin{aligned}
\bar{C}_t + \nabla\cdot(\overline{C\mathbf{v}}) &= 0 \\
\bar{C}_t + \nabla\cdot(\mathbf{v}_e^*\bar{C}) &= 0
\end{aligned}
\tag{12.2}
$$

where $\mathbf{v}_e^*$ denotes effective veclocity $\mathbf{v}_e^* = \kappa\mathbf{v}_f + (1-\kappa)\mathbf{v}_s$ and $\kappa = \frac{\phi_f C_f}{\bar{C}}$ where C_f and $\bar{C}$ using values from previous time step. Enthalpy is transported in a similar manner.

$$
\bar{\mathscr{H}}_t + \nabla\cdot(\overline{\mathscr{H}\mathbf{v}} - \bar{K}\nabla\mathscr{T}) = 0
\tag{12.3}
$$

12.1.1. Boundary conditions. In order to solve the proposed darcy-stokes coupled equation, we need appropriate boundary condtions defined around the computational domain. A detailed description is presented as following:

- Prescribe essential boundary condition of constant upwelling ascending velocity all around the computational domain. $\mathbf{v}_s = \mathbf{W}$ at no melting region.
- Prescribe natural boundary conditon at the place where melting happens.
- Prescribe essential (dirichlet) boundary condition of zero normal velocity on bottom , left and right sides.
- Prescribe natural boundary condition on top. A free outlet

12.1.2. Initial conditions. At the same time, we need an initial conditions for our transport equations. In[5], temperature and composition are distributed linearly along against the depth. Unlike [5], we implement eutectic melting model into our simulation. In our situation, temperature and total composition won't be deterministic. Here I make some modification on the setup. Initially, the entire domain was burried under the partial melting region, where temperature was under the sub-solidus region. Melting starts when the entire chunck ascending adiabatically. As pressure continuously lowering, the eutectic point is lowering at the same time. Hence, melting flux supplies from top.

In eutectic melting situation, we cannot impose simple linear temperature directly due to the existence of the eutectic point. Therefore, an appropriate initial condition should be assigned with careful selection.

Linear Enthalpy distribution (Near constant).

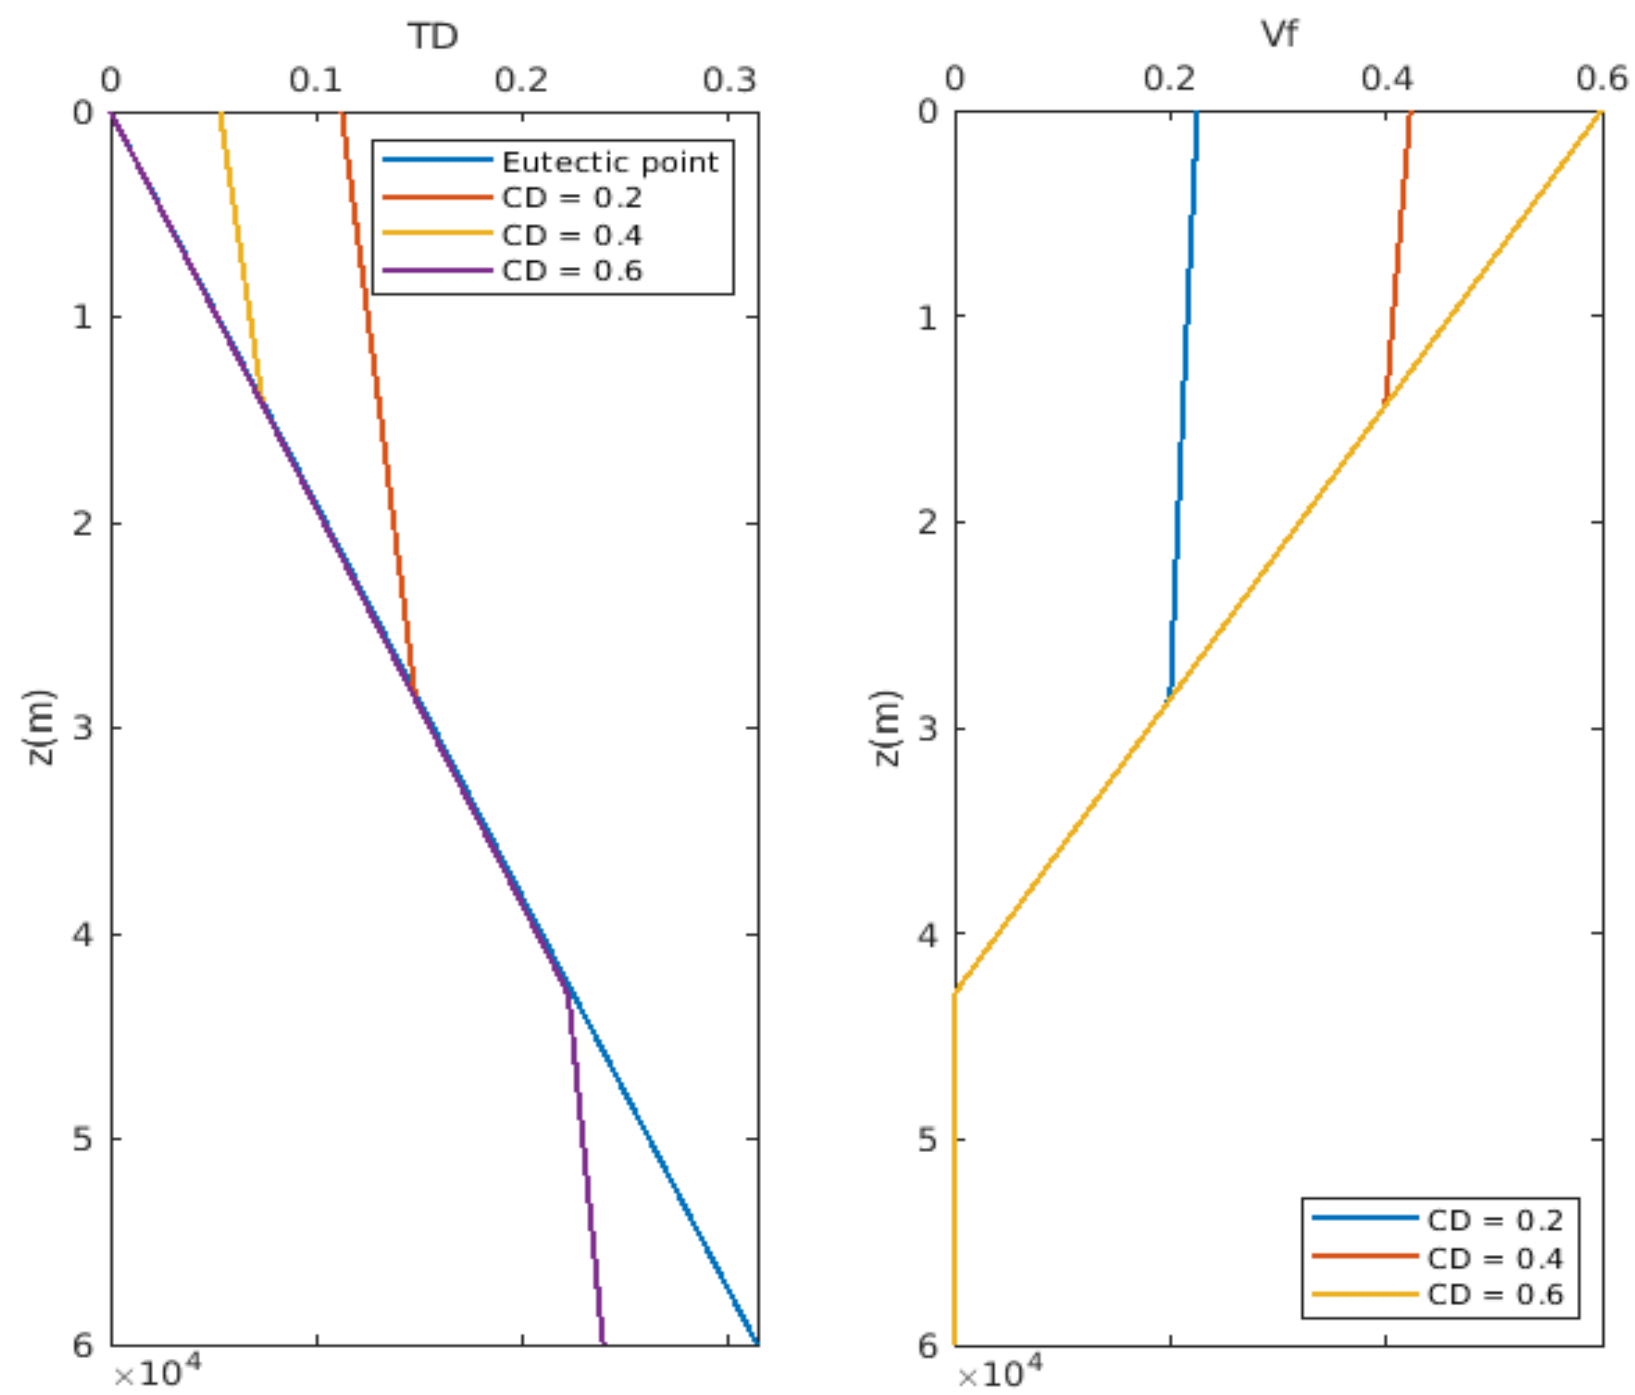

Using enthalpy and composition distribution calculated above, we can generate corresponding initial velocity distribution:

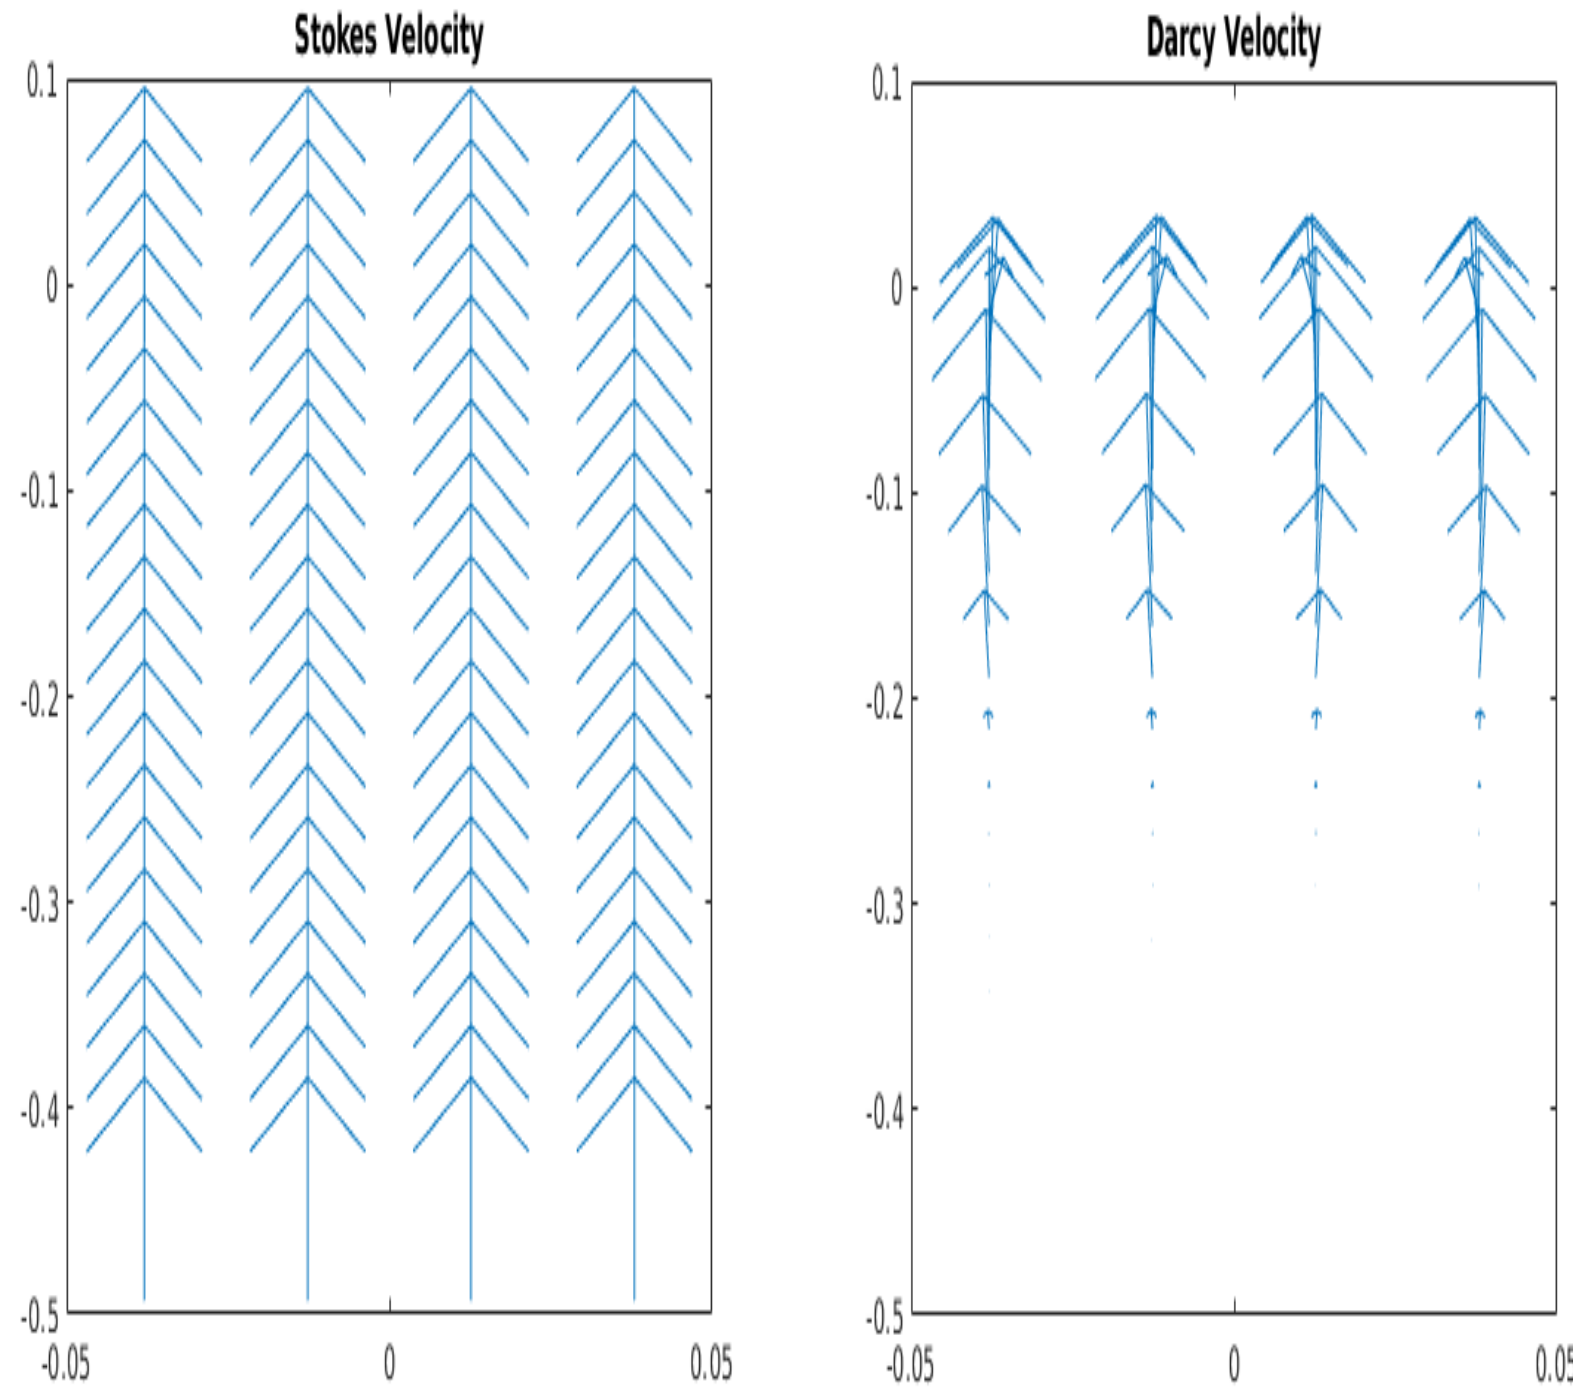

!!!Corrected version

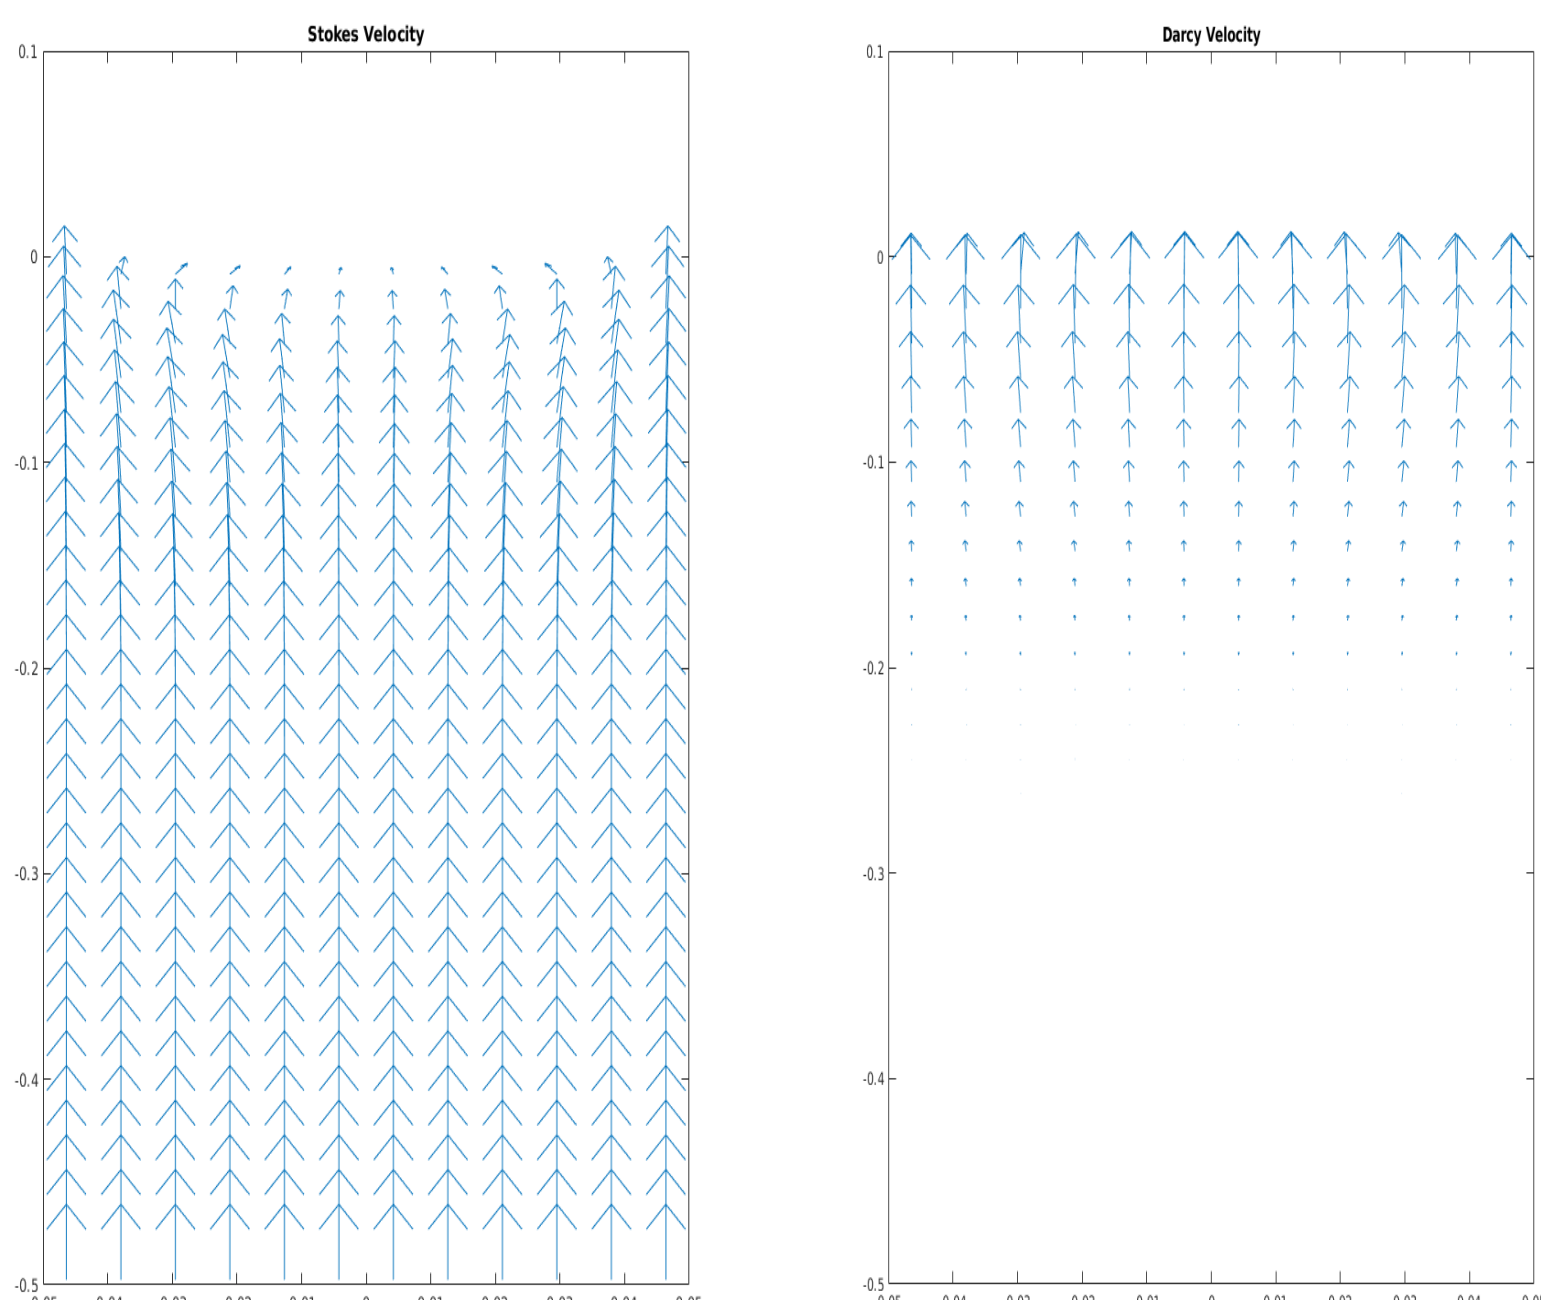

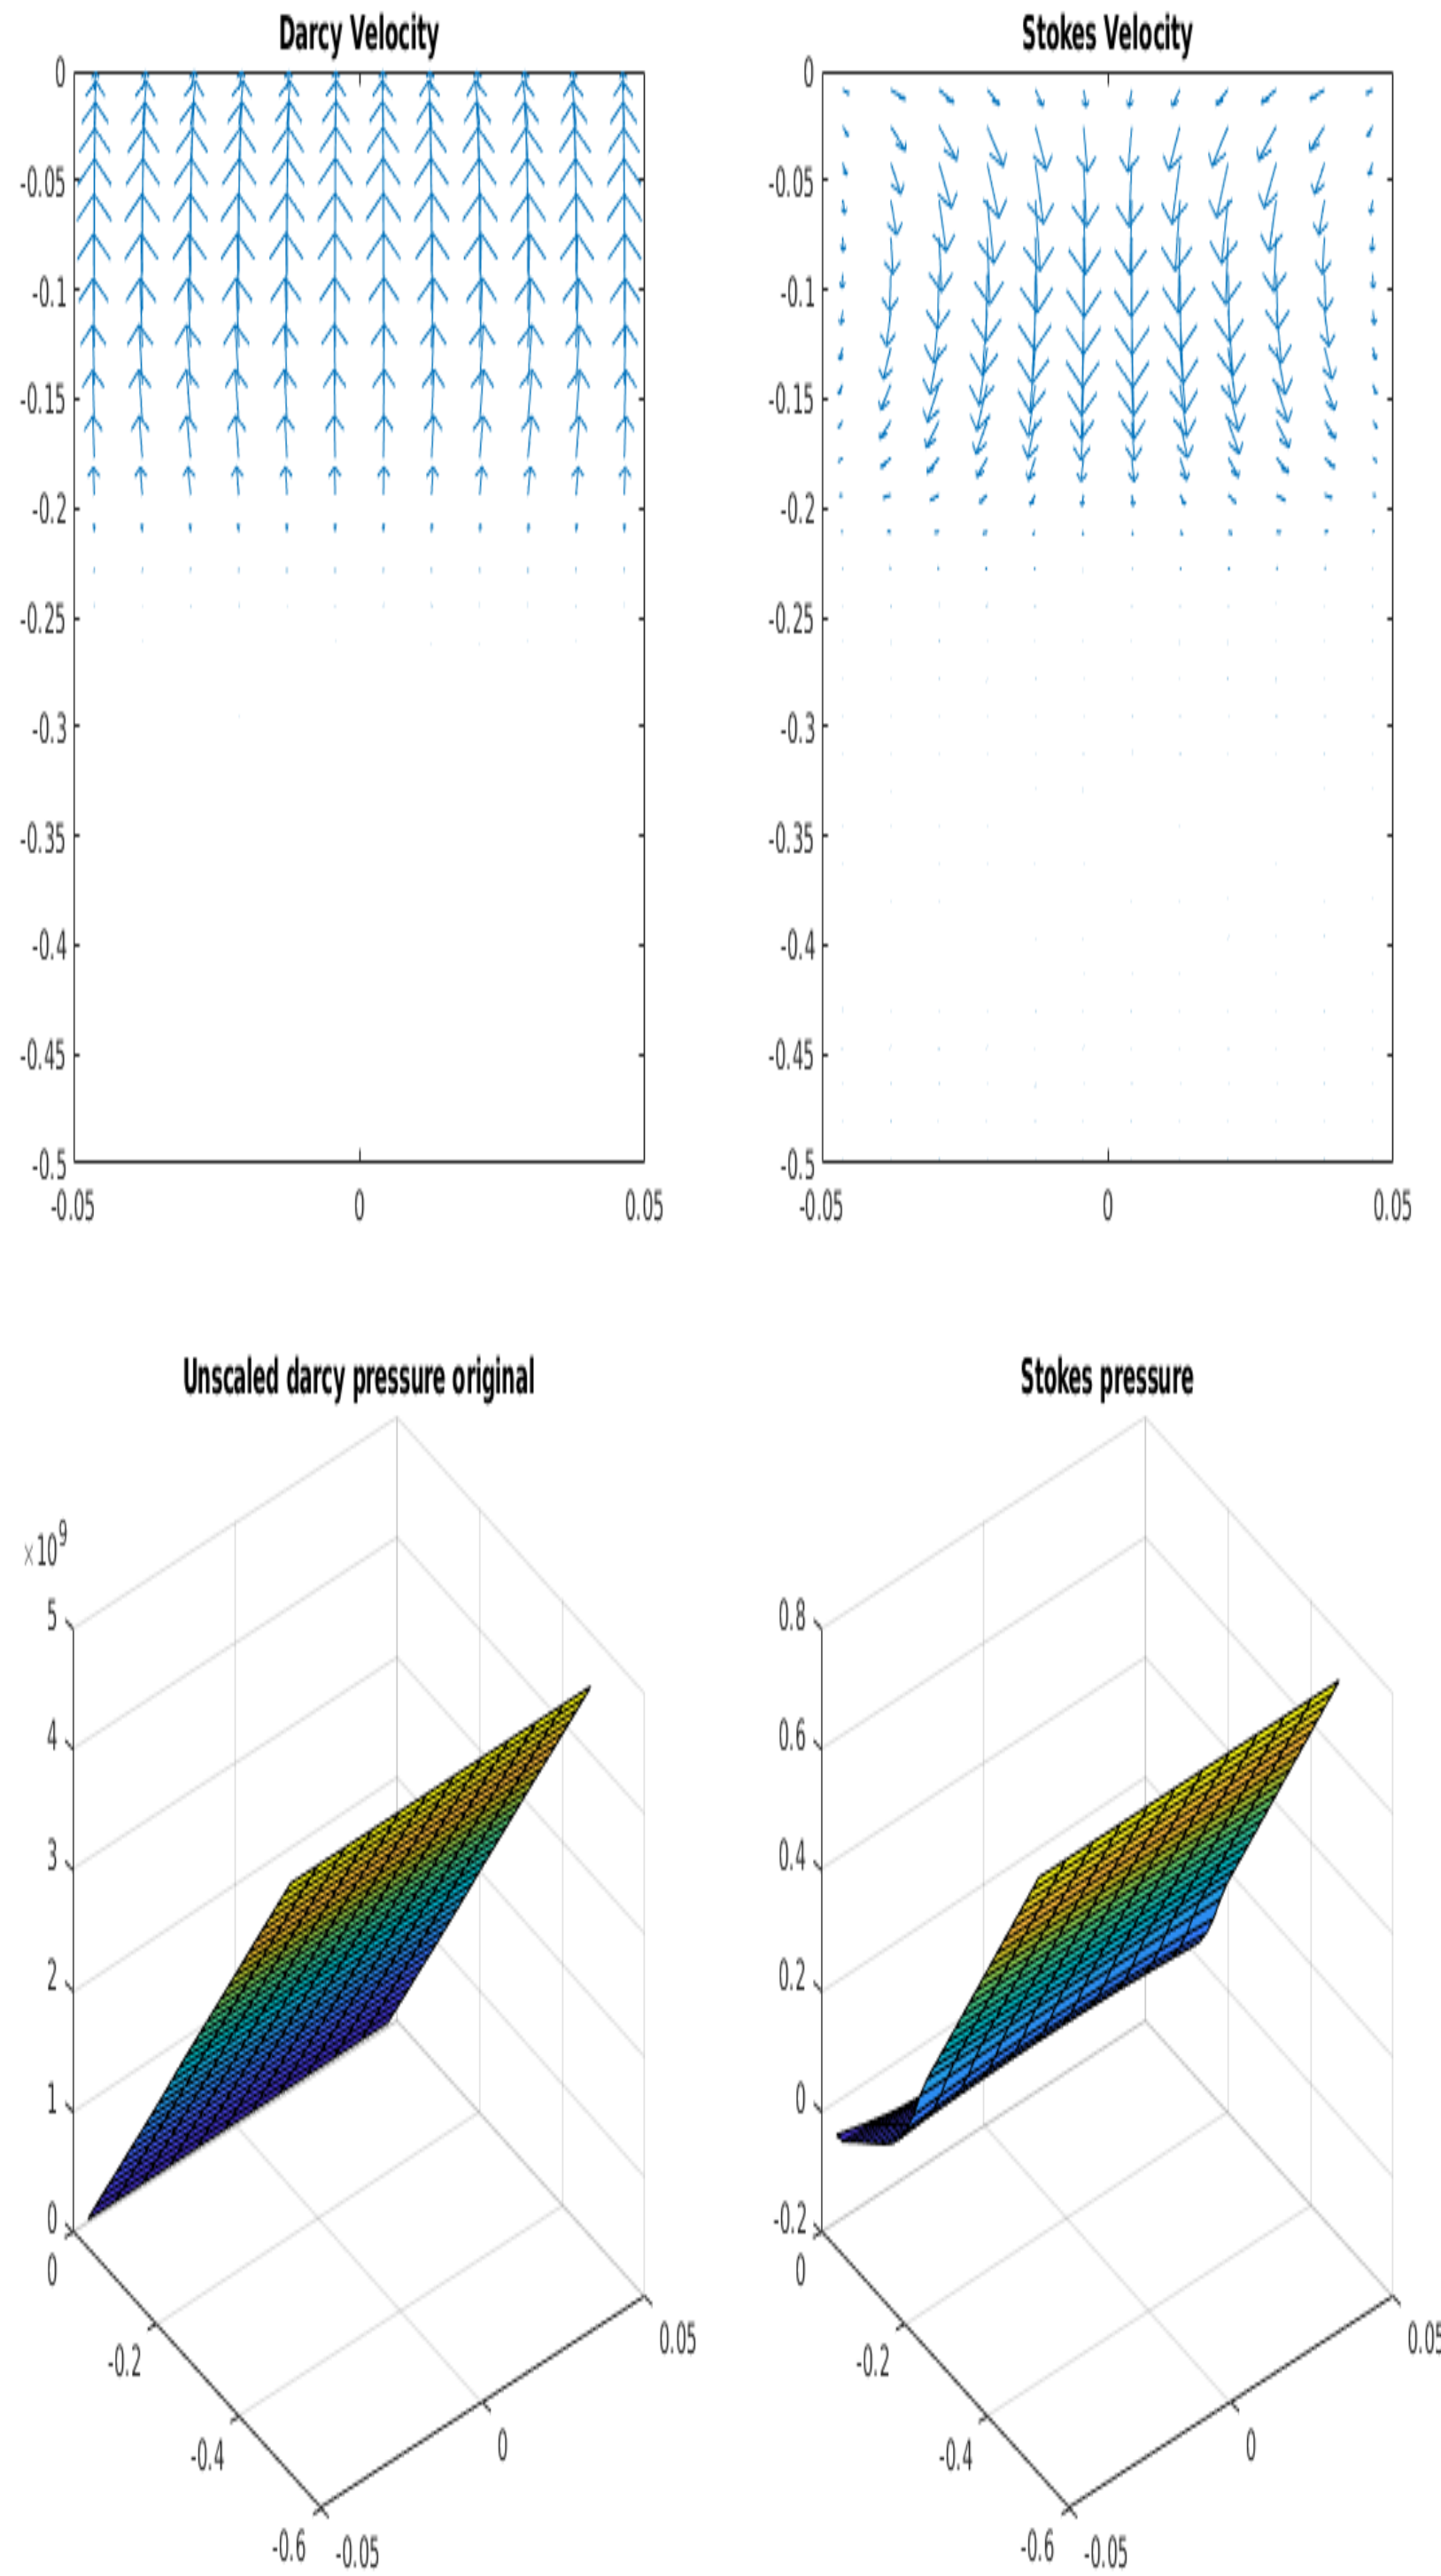
Darcy Velocity
Stokes Velocity
Unscaled darcy pressure original
Stokes pressure
0
-0.05
-0.1
-0.15
-0.2
-0.25
-0.3
-0.35
-0.4
-0.45
-0.5
0.05
x10^9
5
4
3
2
1
0.8
0.6
0.4
0.2
-0.2
-0.6

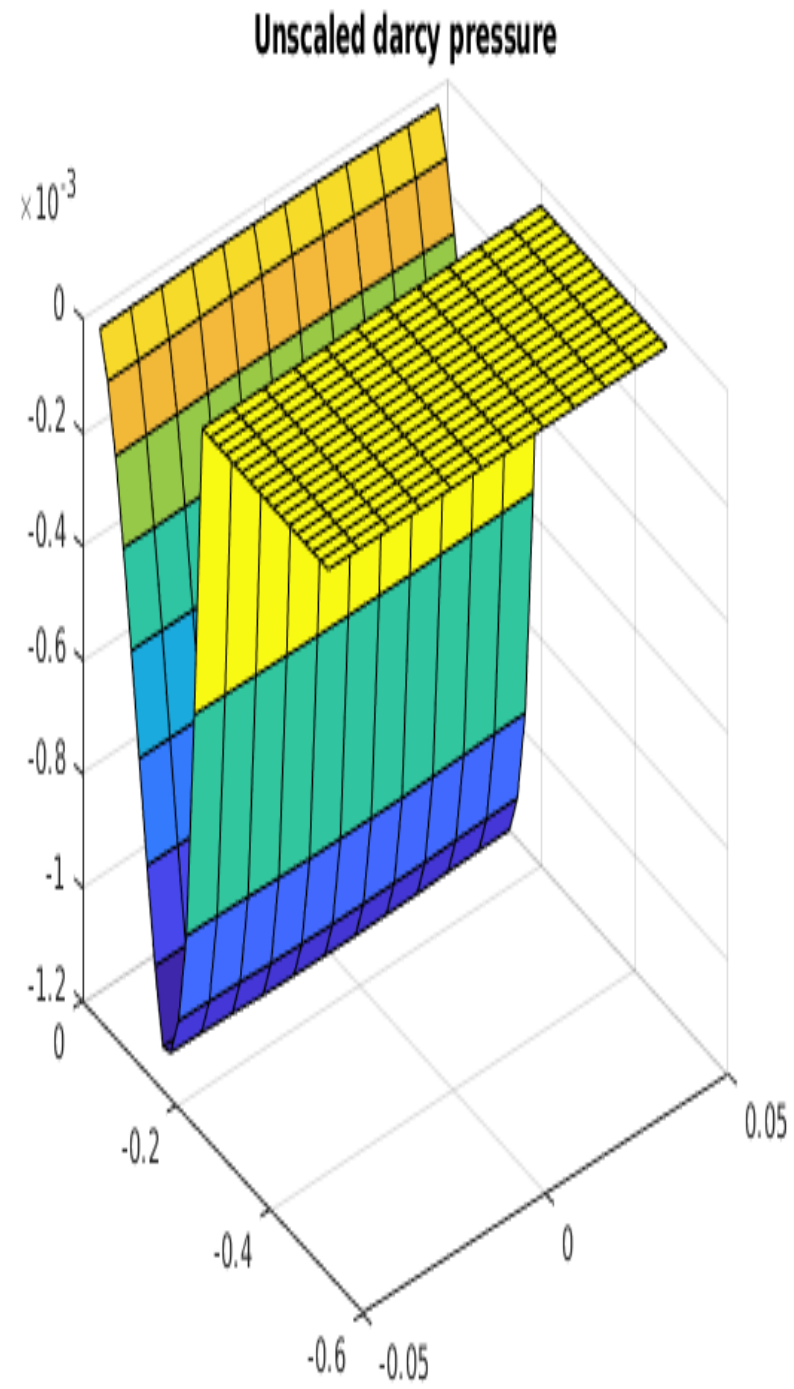
Unscaled darcy pressure
$\times 10^{-3}$
0
-0.2
-0.4
-0.6
-0.8
-1
-1.2
0
-0.2
-0.4
-0.6
-0.05
0
0.05

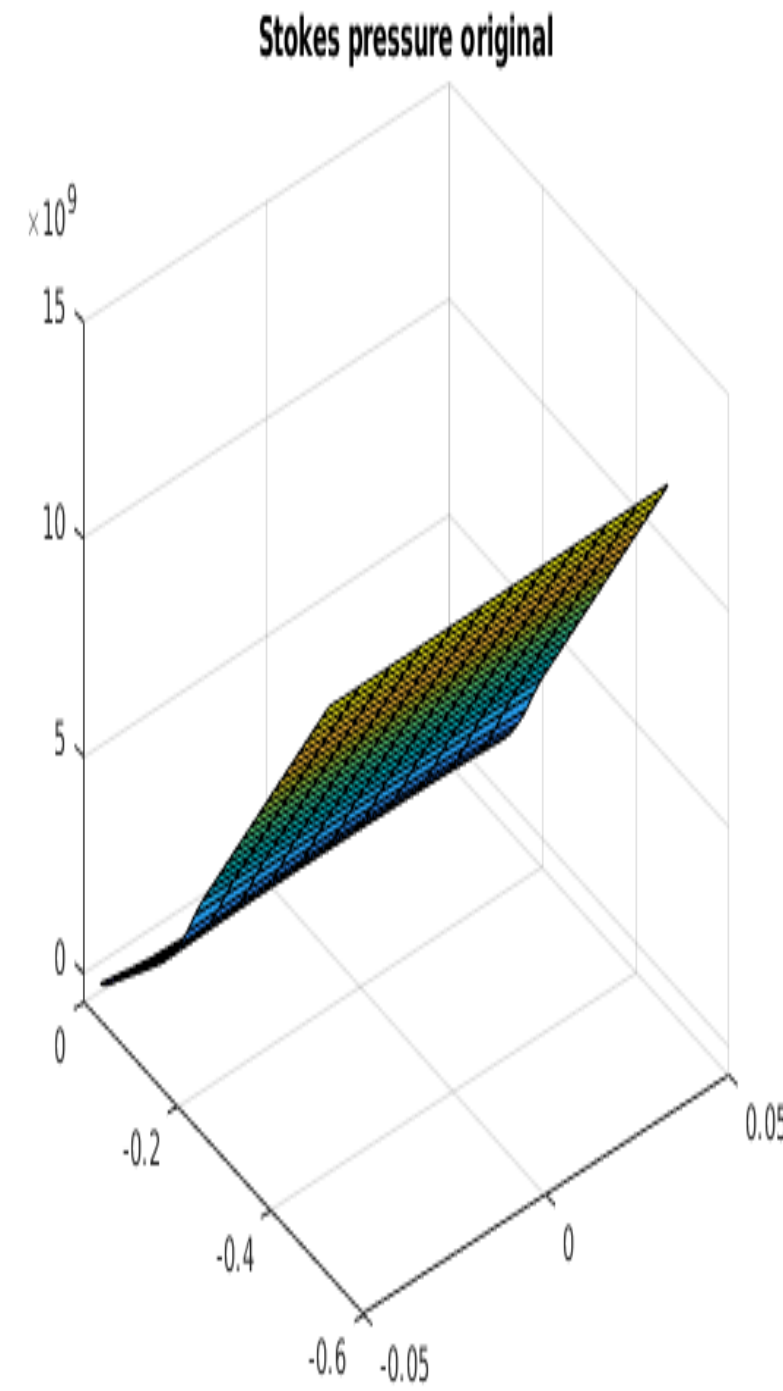
Stokes pressure original
$\times 10^{9}$
15
10
5
0
0
-0.2
-0.4
-0.6
-0.05
0
0.05

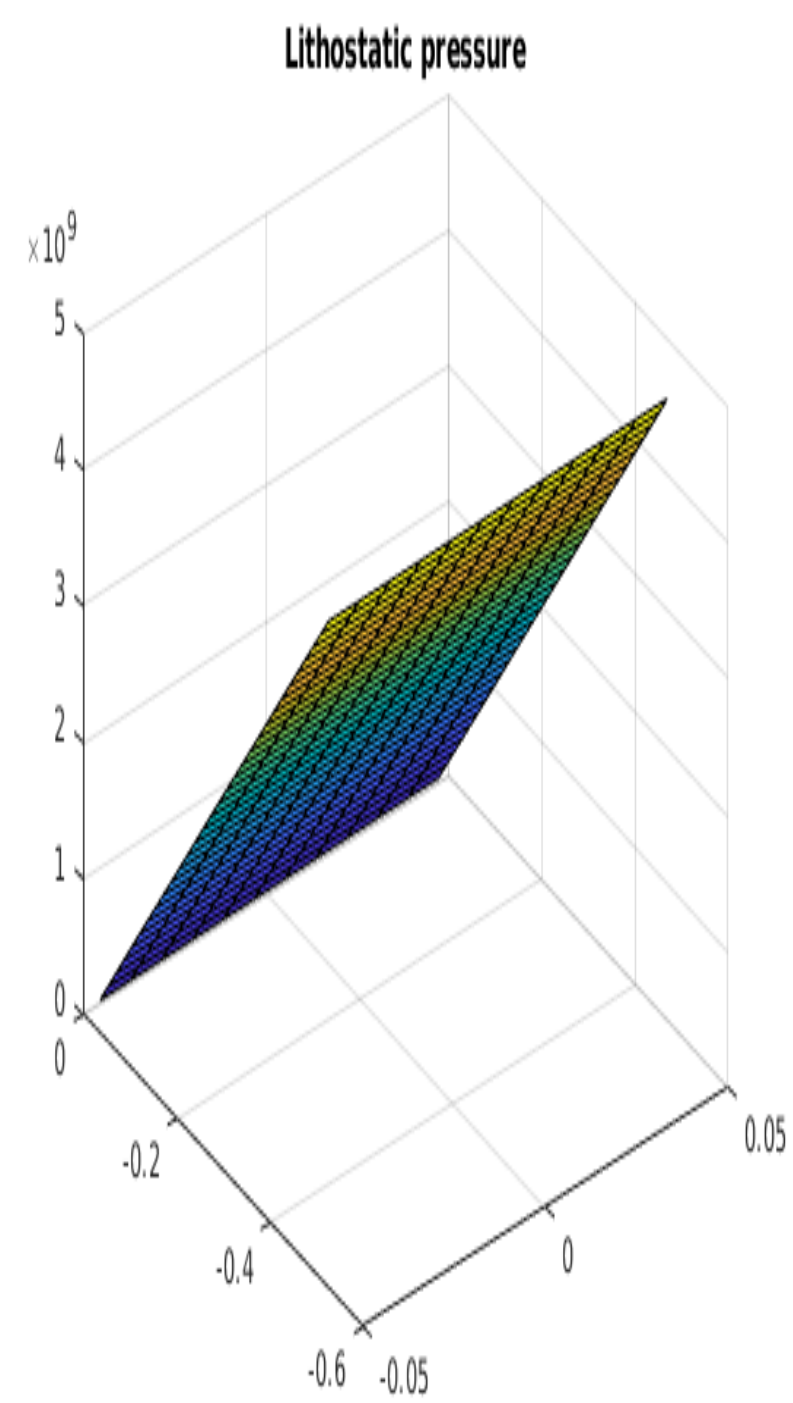
Lithostatic pressure
$\times 10^{9}$
5
4
3
2
1
0
0
-0.2
-0.4
-0.6
-0.05
0
0.05

12.1.3. Melting depth. As the magma chunk ascending adiabatically, we can define a depth z_m where melting starts. From the plots above, we can conclude that in our model

- Change of dimensionless composition can only affect the separaration of eutection and super-eutection region.
- Change of dimensionless composition will not affect where magam leave eutection melting region.

A fixed melting depth can therefore be calculated despite initial dimensionless composition changes.

12.2. Interpolation of stokes pressure. We are using piece-wise constant L2 approximation space for stokes and darcy pressure. In order to evaluate point-wise pressure. We are going to present an interpolation using generated piece-wise constant pressure.

REFERENCES

[1] M. A. S. C. C. Paige, Solution of sparse indefinite systems of linear equations, SIAM. J. Numer. Anal., 12 (1975), pp. 617–629.

[2] G. R. Christine Bernardi, Analysis of some finite elements for the stokes problem, Math. of Comput., 44 (1985), pp. 71–79.

[3] H. C. Elman and G. H. Golub, Inexact and preconditioned uzawa algorithms for saddle point problems, SIAM. J. Numer. Anal., 31 (1994), pp. 1645–1661.

[4] V. Girault and P.-A. Raviart, Finite Element Methods for Navier-Stokes Equations: Theory and Algorithms, Springer Publishing Company, Incorporated, 1st ed., 2011.

[5] I. J. Hewitt, Modelling melting rates in upwelling mantle, Earth and Planetary Science Letters, 300 (2010), pp. 264–274.

[6] A. T. V. James H. Bramble, Joseph E. Pasciak, Analysis of the inexact uzawa algorithm for saddle point problems, SIAM. J. Numer. Anal., 34 (1997), pp. 1072–1092.

[7] S. D. V. Marc A. Hesse, Jacob S. Jordan and A. V. Oza, Supporting information for "downward oxidant transport through europa's ice shell by density-driven brine percolation", Geophysical Research Letters, (2022).

[8] H. F. W. Nguyenho Ho, Sarah D. Olson, Accelerating the uzawa algorithm, SIAM. J. Sci. Comput., 39 (2017), pp. S461–S476.

[9] S.-s. S. W.F. McDonough, The composition of the earth, Chemical Geology, 120 (1995), pp. 223–253.