Chapter 1: Numerical Methods

In this chapter, we introduce a locally mass conserving numerical framework. A conforming mixed finite element method (MFEM) is proposed to solve the static Darcy-Stokes coupled methanics system. The proposed conforming MFEM captures the normal fluxes across element edges, ensuring compatibility with local mass conservation. The transport system is solved using a finite volume method (FVM), which inherently ensures local mass conservation.

We begin by introducing the mesh partition used for both the MFEM and the FVM schemes. Based on the mesh partition, two stable element pairs are presented, one for Darcy flow and one for Stokes flow. We then present a noval nonlinear WENO weighting scheme for the FVM. Error estimates are provided for both the MFEM and the FVM schemes.

1.1 Coupled Degenerate Darcy-Stokes System

Now we consider a scaled nondimensionalized degenerate Darcy-Stokes coupled boundary-value problem:

Find two velocity-pressure potential pairs $(\check{\mathbf{v}}_r, \check{q}_l)$ and $(\check{\mathbf{v}}_s, \check{q})$ such that

$$\check{\mathbf{v}}_r + \phi^{1+\Theta}\nabla(\phi^{-1/2}\check{q}_l) = 0, \tag{1.1}$$

$$\phi^{-1/2}\nabla\cdot(\phi^{1+\Theta}\check{\mathbf{v}}_r) + \frac{1}{1-\phi}(\check{q}_l - \phi^{1/2}\check{q}) = 0, \tag{1.2}$$

$$\nabla\check{q} - \nabla\cdot\check{\tau}(\check{\mathbf{v}}_s) = -(1-\phi)\mathbf{n}, \tag{1.3}$$

$$\nabla\cdot\check{\mathbf{v}}_s - \frac{\phi^{1/2}}{1-\phi}(\check{q}_l - \phi^{1/2}\check{q}) = 0, \tag{1.4}$$

and

$$
\begin{aligned}
\check{\mathbf{v}}_r \cdot \boldsymbol{\nu} = g_r &\quad \text{on } \Gamma_{u,D}, \\
\check{\mathbf{v}}_s = \mathbf{g}_s &\quad \text{on } \Gamma_{u,S}, \\
p = p_0 &\quad \text{on } \Gamma_{i,D}, \\
\boldsymbol{\tau} \cdot \boldsymbol{\nu} - p = \boldsymbol{t}_0 &\quad \text{on } \Gamma_{i,S},
\end{aligned}
\tag{1.5}
$$

where $\Gamma_{u,D}$ and $\Gamma_{u,S}$ denote the part of boundary we assign essential boundary conditions for Darcy and Stokes problem respectively, and $\Gamma_{i,D}$ and $\Gamma_{i,S}$ represent the part of boundary we assign natural boundary conditions respectively. We have $\Gamma_{u,D} \cup \Gamma_{i,D} = \partial\Omega$ and $\Gamma_{u,S} \cup \Gamma_{i,S} = \partial\Omega$.

We expand the gradient term in equation (1.1) and the divergence term in equation (1.2) as

$$
\begin{aligned}
\phi^{1+\Theta}\nabla(\phi^{-1/2}\check{q}_l) &= \phi^{1/2+\Theta}\nabla\check{q}_l + \phi^{\Theta-1/2}\check{q}_l\nabla\phi, \\
\phi^{-1/2}\nabla\cdot(\phi^{1+\Theta}\check{\mathbf{v}}_r) &= \phi^{1/2+\Theta}\nabla\cdot\check{\mathbf{v}}_r + \phi^{\Theta-1/2}\nabla\phi\cdot\check{\mathbf{v}}_r,
\end{aligned}
\tag{1.6}
$$

where they are well-defined provided that

$$
\phi^{\Theta-1/2}\nabla\phi \in (L^\infty(\Omega))^2. \tag{1.7}
$$

A scaled Hilbert space is defined as follows for this specific scaled formulation, where the scaled velocity $\check{\mathbf{v}}_r$ should lie in.

Definition 1.1. Consider a scaled Hilbert space:

$$
\mathbb{V}_D^\phi = H_\phi(\text{div};\Omega) = \Big\{\mathbf{v} \in (L^2(\Omega))^2 : \phi^{-1/2}\nabla\cdot(\phi^{1+\Phi}\mathbf{v}) \in L^2(\Omega)\Big\}, \tag{1.8}
$$

which is a Hilbert space equipped with the inner product

$$
(\mathbf{u},\mathbf{v})_{\mathbb{V}_D^\phi} = (\mathbf{u},\mathbf{v}) + (\phi^{-1/2}\nabla\cdot(\phi^{1+\Theta}\mathbf{u}), \phi^{-1/2}\nabla\cdot(\phi^{1+\Theta}\mathbf{v})). \tag{1.9}
$$

The normal trace on $\partial\Omega$ is well-defined as

$$
\left\|\phi^{1/2+\Theta}\mathbf{v}\cdot\boldsymbol{\nu}\right\|_{H^{-1/2}(\partial\Omega)} < C_\Omega\Big\{ \|\mathbf{v}\|_{L^2(\Omega)} + \left\|\phi^{-1/2}\nabla\cdot(\phi^{1+\Theta}\mathbf{v})\right\|_{L^2(\Omega)} \Big\} \tag{1.10}
$$

subsequently, we have the space $H_\phi^{-1/2}(\text{div};\partial\Omega)$ understood as the image of this normal trace operator.

1.1.1 The weak formulation

We define the following function spaces for the scaled Darcy-Stokes coupled system as

$$\begin{aligned}
\mathbb{V}_D^{\phi} &= \Big\{ \mathbf{v} \in H_{\phi}(\mathrm{div};\Omega) : \phi^{1/2+\Theta}\mathbf{v}\cdot\boldsymbol{\nu} = \mathbf{0} \text{ on } \Gamma_{u,D} \Big\}, \\
\mathbb{U}_D^{\phi} &= \Big\{ \mathbf{u} \in H_{\phi}(\mathrm{div};\Omega) : \phi^{1/2+\Theta}\mathbf{u}\cdot\boldsymbol{\nu} = \mathbf{g}_r \text{ on } \Gamma_{u,D} \Big\} = \tilde{\mathbf{g}}_r + \mathbb{V}_D^{\phi}, \\
\mathbb{W}_D &= L^2(\Omega), \\
\mathbb{V}_S &= \Big\{ \mathbf{v} \in (H^1(\Omega))^2 : \mathbf{v} = \mathbf{0} \text{ on } \Gamma_{u,S} \Big\}, \\
\mathbb{U}_S &= \Big\{ \mathbf{u} \in (H^1(\Omega))^2 : \mathbf{u} = \mathbf{g}_s \text{ on } \Gamma_{u,S} \Big\} = \tilde{\mathbf{g}}_s + \mathbb{V}_S, \\
\mathbb{W}_S &= L^2(\Omega),
\end{aligned} \tag{1.11}$$

where each space is equipped with their natural norms. Here, $\tilde{\mathbf{g}}_r$ and $\tilde{\mathbf{g}}_s$ are finite energy lift of Dirichlet data $\mathbf{g}_r$ and $\mathbf{g}_s$ respectively.

We understand the boundary values in the sense of Trace Theorem **??** and the scaled normal trace operator (1.10). We assume regularity for Dirichlet data $\mathbf{g}_r \in (H_{\phi}^{1/2}(\mathrm{div};\Gamma_{u,D}))^2$ and $\mathbf{g}_s \in (H^{1/2}(\Gamma_{u,S}))^2$. We understand $\tilde{\mathbf{g}}_r \in H_{\phi}(\mathrm{div};\Omega)$ and $\tilde{\mathbf{g}}_s \in (H^1(\Omega))^2$ as a continuous extension from the boundary into the domain.

A compatibility condition enforcing mass conservation on the entire domain is needed if essential boundary condition is prescribed on the entire boundary $\partial\Omega$, i.e., when $\Gamma_{u,D} = \Gamma_{u,S} = \partial\Omega$ the Dirichlet data satisfies

$$\int_{\partial\Omega} (\mathbf{g}_r + \mathbf{g}_s)\cdot\boldsymbol{\nu}\, ds = 0. \tag{1.12}$$

The standard mixed form for the proposed coupled system reads as follows:

Find $\check{\mathbf{v}}_r \in \mathbb{U}_D^{\phi}$, $\check{q}_l \in \mathbb{W}_D$, $\check{\mathbf{v}}_s \in \mathbb{U}_S$, and $\check{q} \in \mathbb{W}_S$ such that

$$(\check{\boldsymbol{\tau}}(\mathbf{v}_s), \nabla\boldsymbol{\psi}_s) - (\check{q}, \nabla\cdot\boldsymbol{\psi}_s) = -((1-\phi)\mathbf{n}, \boldsymbol{\psi}_s) \qquad \forall\boldsymbol{\psi}_s \in \mathbb{V}_S, \tag{1.13}$$

$$(\nabla\cdot\check{\mathbf{v}}_s, \omega) + \Big(\frac{\phi^{1/2}}{1-\phi}(\check{q}_l - \phi^{1/2}\check{q}), \omega\Big) = 0 \qquad \forall\omega \in \mathbb{W}_S, \tag{1.14}$$

$$(\check{\mathbf{v}}_r, \boldsymbol{\psi}_r) - (\check{q}_l, \phi^{-1/2}\nabla\cdot(\phi^{1+\Theta}\check{\mathbf{v}}_r)) = 0, \qquad \forall\boldsymbol{\psi}_r \in \mathbb{V}_D^{\phi}, \tag{1.15}$$

$$(\phi^{-1/2}\nabla\cdot(\phi^{1+\Theta}\check{\mathbf{v}}_r), \omega_f) + \Big(\frac{1}{1-\phi}(\check{q}_l - \phi^{1/2}\check{q}), \omega_f\Big) = 0 \qquad \forall\omega_f \in \mathbb{W}_D. \tag{1.16}$$

We state well-posedness result of the scaled model as follows.

Lemma 1.1. *(Existence and Uniqueness)*

Assume the condition (1.7) *holds,* $0 \le \phi \le \phi^* < 1$*. There exists a unique solution to the scaled formulation* (1.13)–(1.16)*, and it satisfies*

$$\begin{aligned}\|\check{\mathbf{v}}_r\|_{(L^2(\Omega))^2} + \big\|\phi^{-1/2}\nabla\cdot(\phi^{1+\Theta}\check{\mathbf{v}}_r)\big\|_{(L^2(\Omega))^2} + \|\check{q}_l\|_{(L^2(\Omega))^2} + \|\check{\mathbf{v}}_s\|_{(H^1(\Omega))^2} + \|\check{q}\|_{(L^2(\Omega))^2} \\ \le C\big\{|\rho_r| + \|\tilde{\mathbf{g}}_r\|_{(L^2(\Omega))^2} + \big\|\phi^{-1/2}\nabla\cdot(\phi^{1+\Theta}\tilde{\mathbf{g}}_r)\big\|_{(L^2(\Omega))^2} + \|\tilde{\mathbf{g}}_s\|_{H^1(\Omega)}\big\}.\end{aligned} \tag{1.17}$$

Proof. See Arbogast et al. (2017). □

1.1.2 The scaled mixed finite element method

We discretize the scaled mixed formulation with two space pairs $\mathbb{V}_{D,h}\times\mathbb{W}_{D,h} \subset H(\text{div};\Omega)\times L^2(\Omega)$ and $\mathbb{V}_{S,h}\times\mathbb{W}_{S,h} \subset (H^1(\Omega))^2\times L^2(\Omega)$. Recall the aforementioned inf-sup stable mixed finite element space pairs on $E \in \mathcal{T}_h$:

- For the Darcy part of the system.

$$\begin{aligned}\mathbb{V}_{D,h}(E) &= \mathbb{V}_1^0(E) = (\mathbb{P}_1(E))^2 \oplus \operatorname{curl}\mathbb{S}_2^{\mathcal{DS}}(E) \\ \mathbb{W}_{D,h}(E) &= \mathbb{W}(E) = \mathbb{P}_0(E)\end{aligned} \tag{1.18}$$

- For the Stokes part of the system.

$$\begin{aligned} \mathbb{V}_{S,h}(E) &= \mathbb{V}_1^{\mathcal{BR}}(E) = (\mathcal{DS}_1(E))^2 \oplus \operatorname{span}\{\mathbf{b}_0, \mathbf{b}_1, \mathbf{b}_2, \mathbf{b}_3\} \\ \mathbb{W}_{S,h}(E) &= \mathbb{W}(E) = \mathbb{P}_0(E). \end{aligned} \tag{1.19}$$

We can impose essential boundary conditions by projecting extensions $\tilde{\mathbf{g}}_r$ and $\tilde{\mathbf{g}}_s$ into the finite element spaces as $\hat{\mathbf{g}}_r \in \mathbb{V}_{D,h}$ and $\hat{\mathbf{g}}_s \in \mathbb{V}_{S,h}$.

We also define

$$\begin{aligned} \mathbb{V}_{D,h,0} &= \{\mathbf{v} \in \mathbb{V}_{D,h} : \mathbf{v} \cdot \boldsymbol{\nu} = 0 \text{ on } \Gamma_{u,D}\} \\ \mathbb{V}_{S,h,\mathbf{0}} &= \{\mathbf{v} \in \mathbb{V}_{S,h} : \mathbf{v} = \mathbf{0} \text{ on } \Gamma_{u,S}\} \end{aligned} \tag{1.20}$$

The scaled mixed finite element method: Find $\check{\mathbf{v}}_{r,h} \in \mathbb{V}_{D,h,0} + \hat{\mathbf{g}}_r$, $\check{q}_{r,h} \in \mathbb{W}_{D,h}$, $\check{\mathbf{v}}_{s,h} \in \mathbf{V}_{S,h,\mathbf{0}} + \hat{\mathbf{g}}_s$ and $\check{q}_h \in \mathbb{W}_{S,h}$ such that

$$(\boldsymbol{\tau}(\check{\mathbf{v}}_{s,h}), \nabla \boldsymbol{\psi}_{s,h}) - (\check{q}_h, \nabla \cdot \boldsymbol{\psi}_{s,h}) = -((1-\phi)\mathbf{n}, \boldsymbol{\psi}_{s,h}), \qquad \forall \boldsymbol{\psi}_{s,h} \in \mathbb{V}_{S,h,\mathbf{0}}, \tag{1.21}$$

$$(\nabla \cdot \check{\mathbf{v}}_{s,h}, \omega_h) - \left(\frac{\phi^{1/2}}{1-\phi}(\check{q}_{l,h} - \phi^{1/2}\check{q}_h), \omega_h\right) = 0, \qquad \forall \omega_h \in \mathbb{W}_{S,h}, \tag{1.22}$$

$$(\check{\mathbf{v}}_{r,h}, \boldsymbol{\psi}_{r,h}) - (\check{q}_{l,h}, \phi^{-1/2}\nabla \cdot (\phi^{1+\Theta}\boldsymbol{\psi}_{r,h})) = 0, \qquad \forall \boldsymbol{\psi}_{r,h} \in \mathbb{V}_{D,h,0}, \tag{1.23}$$

$$(\phi^{-1/2}\nabla \cdot (\phi^{1+\Theta}\check{\mathbf{v}}_{r,h}), \omega_{l,h}) + \left(\frac{1}{1-\phi}(\check{q}_{l,h} - \phi^{1/2}\check{q}_h), \omega_{l,h}\right) = 0, \qquad \forall \omega_{l,h} \in \mathbb{W}_{D,h}. \tag{1.24}$$

1.1.3 Local Mass Conservation

Before we continue the discussion, we need to make sure that the formulation is well-defined, i.e., not dividing by zero. The term $\phi^{-1/2}$ in the symmetric equations (1.23) and (1.24) causes trouble when there is no melting, i.e., $\phi = 0$. In order to deal with it, we define an element-averaged variable ϕ_E as

$$\phi_E = \frac{1}{|E|}\int_E \phi(\mathbf{x})\, d\mathbf{x}, \tag{1.25}$$

where $|E|$ is the area of element E. Then the two terms involving divergence is modified as

$$\phi^{-1/2}\nabla \cdot (\phi^{1+\Theta}\mathbf{v})|_E = \begin{cases} \phi_E^{-1/2}\nabla \cdot (\phi^{1+\Theta}\mathbf{v}) & \text{if } \overline{\phi}_E \neq 0, \\ 0 & \text{if } \overline{\phi}_E = 0, \end{cases} \tag{1.26}$$

where the point-wise term $\phi^{-1/2}$ is modified to be a cell-averaged term $\phi_E^{-1/2}$. We expand the integral term involving divergence according to the divergence theorem as

$$\begin{aligned}\int_E \phi_E^{-1/2}\nabla\cdot(\phi^{1+\Theta}\boldsymbol{\psi}_{r,h})\omega_{l,h}\,d\mathbf{x} = &\int_{\partial E}\phi_E^{-1/2}\phi^{1+\Theta}\boldsymbol{\psi}_{r,h}\cdot\boldsymbol{\nu}\omega_{l,h}\,ds \\ &+\int_E \phi_E^{-1/2}\phi^{1+\Theta}\boldsymbol{\psi}_{r,h}\cdot\nabla\omega_{l,h}\,d\mathbf{x}.\end{aligned} \tag{1.27}$$

The second term vanishes when $\omega_{l,h}$ is constant on element E. We now propose our local mass conserved version by replacing the term $\phi^{1/2}$ in equation (1.22) with $\phi_E^{1/2}$ as

$$(\boldsymbol{\tau}(\check{\mathbf{v}}_{s,h}),\nabla\boldsymbol{\psi}_{s,h}) - (\check{q}_h,\nabla\cdot\boldsymbol{\psi}_{s,h}) = -((1-\phi)\mathbf{n},\boldsymbol{\psi}_{s,h}) \qquad \forall\boldsymbol{\psi}_{s,h},\in\mathbb{V}_{S,h,\mathbf{0}}, \tag{1.28}$$

$$(\nabla\cdot\check{\mathbf{v}}_{s,h},\omega_h) - \Big(\frac{\phi\phi_E^{-1/2}}{1-\phi}(\check{q}_{l,h}-\phi_E^{1/2}\check{q}_h),\omega_h\Big) = 0, \qquad \forall\omega_h\in\mathbb{W}_{S,h}, \tag{1.29}$$

$$(\check{\mathbf{v}}_{r,h},\boldsymbol{\psi}_{r,h}) - (\check{q}_{l,h},\phi_E^{-1/2}\nabla\cdot(\phi^{1+\Theta}\boldsymbol{\psi}_{r,h})) = 0, \qquad \forall\boldsymbol{\psi}_{r,h}\in\mathbb{V}_{D,h,0}, \tag{1.30}$$

$$(\phi_E^{-1/2}\nabla\cdot(\phi^{1+\Theta}\check{\mathbf{v}}_{r,h}),\omega_{l,h}) + \Big(\frac{\phi\phi_E^{-1}}{1-\phi}(\check{q}_{l,h}-\phi_E^{1/2}\check{q}_h),\omega_{l,h}\Big) = 0, \qquad \forall\omega_{l,h}\in\mathbb{W}_{D,h}. \tag{1.31}$$

To see local mass conservation of the fluid, let $E\in\mathcal{T}_h$ be any element. The equation (1.31) gives

$$\int_E \nabla\cdot(\phi^{1+\Theta}\check{\mathbf{v}}_{r,h})d\mathbf{x} + \int_E\frac{\phi}{1-\phi}(\check{q}_{l,h}-\phi_E^{1/2}\check{q}_h)dx = 0, \tag{1.32}$$

and the equation (1.29) gives

$$\int_E \nabla\cdot\mathbf{v}_{s,h}d\mathbf{x} - \int_E\frac{\phi}{1-\phi}(\check{q}_{l,h}-\phi_E^{1/2}\check{q}_h)dx = 0. \tag{1.33}$$

We define an auxiliary space ω_E being 1 on E and 0 elsewhere. We sum equations (1.29) and (1.31) together assuming that $\omega_h=\omega_E\in\mathbb{W}_{S,h}$ and $\omega_{l,h}=\phi_E^{-1/2}\omega_E\in\mathbb{W}_{D,h}$. The local mass conservation of the phase-averaged mixture is now retrieved as

$$\int_E\nabla\cdot(\phi^{1+\Theta}\check{\mathbf{v}}_r+\check{\mathbf{v}}_s)d\mathbf{x} = 0. \tag{1.34}$$

1.1.4 Recovery of the unscaled Darcy variables

The unscaled Darcy potential is $\check{q}_f = \phi^{-1/2}\tilde{\check{q}}_l$, see (**??**). We can reterive an approximate Darcy potential. We assume that $\check{q}_{f,h} \in \mathbb{W}_{D,h}$, so on an element E we define

$$\check{q}_{l,h}|_E = \begin{cases} \phi_E^{-1/2}\tilde{\check{q}}_{l,h}|_E & \text{if} \phi_E \neq 0, \\ 0 & \text{if} \phi_E = 0, \end{cases} \tag{1.35}$$

where the liquid pressure potential $\check{q}_l$ does not hold any physical meanings when there is no melting presents ($\phi = 0$).

The relative Darcy velocity is given by $\check{\mathbf{v}}_r = \phi^{\Theta}\tilde{\check{\mathbf{v}}}$, see (**??**) as well. To maintain local mass balance, we enforce that on each edge $e_i \subset \partial E$

$$\int_{e_i} \phi^{1+\Theta}\tilde{\check{\mathbf{v}}}_r \cdot \boldsymbol{\nu}_i \, ds = \int_{e_i} \phi\check{\mathbf{v}}_{r,h} \cdot \boldsymbol{\nu} \, ds. \tag{1.36}$$

1.1.5 Uniqueness and Convergence properties

Lemma 1.2. *Assuming* (1.7) *holds, there exists a unique solution to the modified local mass conservation modified scaled mixed finite element method* (1.28)–(1.31).

Proof. See Arbogast et al. (2017). The local mass conservation modification replace the term $1/(1-\phi)$ with $(\phi\phi_E^{-1})/(1-\phi)$,which makes it completely analogous to the previous proof. Hence, we are not repeating here. □

We now derive a bound for the local mass conservation modified scaled mixed finite element method.

We derive a bound for the error by taking the difference of

We use the projection operators defined in

1.2 Saddle Point System

Saddle point system is widely spread in technical and science scenarios, such as constrained optimization problem, image reconstruction and optimal control. Saddle point system has been widely and systematically studied, e.g., by Benzi et al. (2005). In our case, saddle point system is formed along with the Mixed Finite Element discretization. In this section, we give a brief overview of properties of a saddle point system and some common ways to solve such system. An abstract saddle point system can be represented as

$$\begin{bmatrix} \mathbf{A} & \mathbf{B} \\ \mathbf{B}^T & -\mathbf{C} \end{bmatrix} \begin{bmatrix} \mathbf{x} \\ \mathbf{y} \end{bmatrix} = \begin{bmatrix} \mathbf{f} \\ \mathbf{g} \end{bmatrix}. \tag{1.37}$$

Assuming the following properties:

- $\mathbf{A}$ is symmetric: $\mathbf{A} = \mathbf{A}^T$;
- $\mathbf{A}$ is nonsingular: $\mathbf{A}^{-1}$ exists;
- $\mathbf{C}$ is symmetric and positive semidefinite;
- $\mathbf{B}$ is rank deficient.

1.2.1 Reduced Linear System

Now we discuss the saddle point system (SPS) induced by MFEM method in details including the boundary conditions. To begin with, we regroup dofs according to the boundary condition.

$$\mathbf{A} = \begin{bmatrix} \mathbf{A}_K & \mathbf{A}_M \\ \mathbf{A}_M^T & \mathbf{M} \end{bmatrix}, \tag{1.38}$$

where $\mathbf{A}_K$ consists of interaction within interior dofs and natural boundary condition dofs, and $\mathbf{A}_M$ consists of iteraction between interior dofs, natural boundary dofs and essential boundary dofs.

We perform the same treatment for matrix $\mathbf{B}$ and right hand side vector $\mathbf{f}$, by regrouping dofs according to its iteration with boundary conditions.

$$\mathbf{B} = \begin{bmatrix} \mathbf{B}_K \\ \mathbf{B}_M \end{bmatrix}, \text{and} \quad \mathbf{F} = \begin{bmatrix} \mathbf{F}_K \\ \mathbf{F}_M \end{bmatrix} \tag{1.39}$$

We rewrite the linear system with the regrouped dofs and form a reduced system as

$$\begin{bmatrix} \mathbf{A}_K & \mathbf{B}_K \\ \mathbf{B}_K^T & -\mathbf{C} \end{bmatrix} \begin{bmatrix} \mathbf{x} \\ \mathbf{y} \end{bmatrix} = \begin{bmatrix} \mathbf{F}_K - \mathbf{A}_M \mathbf{g} - \mathbf{g}_N \\ \mathbf{G} - \mathbf{B}_M^T \mathbf{g} \end{bmatrix}, \tag{1.40}$$

where $\mathbf{g}$ denotes the values prescribed for essential boundary, and $\mathbf{g}_N$ is the vector generated by the natural boundary condition part. The reformed reduced system is still a saddle point syste.

Now we take a closer look at the formed linear system. The no melting (zero porosity $\phi = 0$) region adds difficulties to solving the formed saddle point system. On one hand, the existence of zero porosity region guarantees that $\mathbf{B}$ matrix formed in Darcy system does not has full column rank. Therefore the schur complement

$$\mathbf{S} = -(\mathbf{C} + \mathbf{B}\mathbf{A}^{-1}\mathbf{B}^T),$$

is usually not invertable directly. On the other hand, in addition to the constant null space induced by gradient of pressure, the null space of $\mathbf{B}$ matrix $\ker(\mathbf{B})$ in our darcy problem is not fixed due to evloution of melting (change of zero porosity region).

Taking into consideration that the solver will be implemented in parallel, a iterative solver is more suitable than direct solver.

1.2.2 Schur Complement

To begin with, we discuss a "direct" way to solve this derived saddle point system. Now consider a general saddle point system (1.37) with symmetric positive-definite matrix $\mathbf{A}$ as

$$\begin{aligned} \mathbf{A}\mathbf{x} + \mathbf{B}\mathbf{y} &= \mathbf{f}, \\ \mathbf{B}^T\mathbf{x} - \mathbf{C}\mathbf{y} &= \mathbf{g}. \end{aligned} \tag{1.41}$$

We represent the solution vector $\mathbf{x}$ as

$$\mathbf{x} = \mathbf{A}^{-1}(\mathbf{f} - \mathbf{B}\mathbf{y}), \tag{1.42}$$

where $\mathbf{A}^{-1}$ is computed with conjugate gradient algorithm. We then eliminate $\mathbf{x}$ to represent $\mathbf{y}$ as

$$\mathbf{y} = \mathbf{S}^{-1}(\mathbf{g} - \mathbf{B}^T\mathbf{A}^{-1}\mathbf{f}), \tag{1.43}$$

where $\mathbf{S}^{-1}$ is computed with Minimal Resigual algorithm Paige and Saunders (1975) due to the formed Schur complement being a symmtric indefinite system.

1.2.3 Uzawa Iteration

Uzawa algorithm was originally introduced by K.J.Arrow et al. (1958), which gained popularity in computational fluid dynamics. It has later been applied to the case of discretizing Stokes problem with Mixed Finite Element. Some inexact inner solver to accelerate uzawa iteration was discussed by Elman and Golub (1994) and Bramble et al. (1997).

We start by stating an abstract inexact ezawa iteration algorithm in Algorithm 1. Some choose diagonal matrix $\alpha\mathbf{I}$ for preconditioner $\mathbf{Q}_A$. However, such

Algorithm 1 Inexact Uzawa Iteration

1: Initialize $\mathbf{x}_0 = \mathbf{0}$, $\mathbf{y}_0 = \mathbf{0}$, tolence tol $= 1$ and residual $res = 0$.
2: **while** res $>$ tol **do**
3: Obtain $\tilde{\mathbf{x}} = \mathbf{Q}_A^{-1}(\mathbf{F} - (\mathbf{A}\mathbf{x}_i + \mathbf{B}\mathbf{y}_i))$
4: Update $\mathbf{x}_{i+1} = \mathbf{x}_i + \tilde{\mathbf{x}}$
5: Obtain $\tilde{\mathbf{y}} = \mathbf{Q}_B^{-1}(\mathbf{B}^T\mathbf{x}_{i+1} + \mathbf{C}\mathbf{y}_i - \mathbf{G})$
6: Update $\mathbf{y}_{i+1} = \mathbf{y}_i + \tilde{\mathbf{y}}$
7: Update res $= \|\tilde{\mathbf{x}}\|_2 + \|\tilde{\mathbf{y}}\|_2$
8: **end while**

simple matrix wouldn't generate a convergence result when applied to our coupled problem. In the next section, we introduce a modified algorithm that would solve our system.

1.2.4 Modified Uzawa Iteration

The linear system formed from the equations (1.28), (1.29), (1.30) and (1.31) is

$$\begin{bmatrix} \mathbf{A}_s & -\mathbf{B}_s & \mathbf{0} & \mathbf{0} \\ \mathbf{B}_s^T & \mathbf{C}_s & \mathbf{0} & \mathbf{K} \\ \mathbf{0} & \mathbf{0} & \mathbf{A}_d & -\mathbf{B}_d \\ \mathbf{0} & \mathbf{K} & \mathbf{B}_d^T & \mathbf{C}_d \end{bmatrix} \begin{bmatrix} \mathbf{x}_s \\ \mathbf{y}_s \\ \mathbf{x}_d \\ \mathbf{y}_d \end{bmatrix} = \begin{bmatrix} \mathbf{f}_s \\ \mathbf{g}_s \\ \mathbf{f}_d \\ \mathbf{g}_d \end{bmatrix}, \tag{1.44}$$

wherein the solution represents the degrees of freem of primary variables with respect to the bases of the finite element spaces. (Insert details of calculation of each blocked matrix). We form a double saddle point system by symmetrically permutate original linear system,

$$\begin{bmatrix} \mathbf{A}_s & \mathbf{0} & -\mathbf{B}_s & \mathbf{0} \\ \mathbf{0} & \mathbf{A}_d & \mathbf{0} & -\mathbf{B}_d \\ \mathbf{B}_s^T & \mathbf{0} & \mathbf{C}_s & \mathbf{K} \\ \mathbf{0} & \mathbf{B}_d^T & \mathbf{K} & \mathbf{C}_d \end{bmatrix} \begin{bmatrix} \mathbf{x}_s \\ \mathbf{x}_d \\ \mathbf{y}_s \\ \mathbf{y}_d \end{bmatrix} = \begin{bmatrix} \mathbf{f}_s \\ \mathbf{f}_d \\ \mathbf{g}_s \\ \mathbf{g}_d \end{bmatrix}. \tag{1.45}$$

We group these block matrix to form a concise version,

$$\mathbf{A} = \begin{bmatrix} \mathbf{A}_s & \mathbf{0} \\ \mathbf{0} & \mathbf{A}_d \end{bmatrix}, \quad \mathbf{B} = \begin{bmatrix} -\mathbf{B}_s & \mathbf{0} \\ \mathbf{0} & -\mathbf{B}_d \end{bmatrix}, \quad \mathbf{C} = \begin{bmatrix} -\mathbf{C}_s & -\mathbf{K} \\ -\mathbf{K} & -\mathbf{C}_d \end{bmatrix}, \quad \mathbf{F} = \begin{bmatrix} \mathbf{f}_s \\ \mathbf{f}_d \end{bmatrix}, \quad \mathbf{G} = \begin{bmatrix} -\mathbf{g}_s \\ -\mathbf{g}_d \end{bmatrix}, \tag{1.46}$$

$$\begin{bmatrix} \mathbf{A} & \mathbf{B} \\ \mathbf{B}^T & \mathbf{C} \end{bmatrix} \begin{bmatrix} \mathbf{x} \\ \mathbf{y} \end{bmatrix} = \begin{bmatrix} \mathbf{F} \\ \mathbf{G} \end{bmatrix}, \tag{1.47}$$

where $\mathbf{A}$ is a positive definite matrix. However, $\mathbf{B}$ is usually a singular matrix when no melting region presents. We will present a modified Uzawa iteration algorithm to deal with this coupled degenerate singular system.

Algorithm 2 Modified Uzawa Iteration

1: Initialize $\mathbf{x}_0 = \mathbf{0}$, $\mathbf{y}_0 = \mathbf{0}$, tolence tol $= 1$ and residual $res = 0$.

2: **while** res $>$ tol **do**

3: Obtain $\tilde{\mathbf{x}} = \mathbf{A}^{-1}(\mathbf{F} - (\mathbf{A}\mathbf{x}_i + \mathbf{B}\mathbf{y}_i))$

4: Update $\mathbf{x}_{i+1} = \mathbf{x}_i + \tilde{\mathbf{x}}$

5: Obtain $\mathbf{r} = \mathbf{B}^T\mathbf{x}_{i+1} + \mathbf{C}\mathbf{y}_i - \mathbf{G}$

6: Obtain $\tilde{\mathbf{y}} = \mathrm{argmin}_{\mathbf{x}\in V}||(\mathbf{B}^T\mathbf{A}^{-1}\mathbf{B} - \mathbf{C})^{-1}\tilde{\mathbf{y}} - \mathbf{r}||$

7: Update $\mathbf{y}_{i+1} = \mathbf{y}_i + \tilde{\mathbf{y}}$

8: Update res $= \|\tilde{\mathbf{x}}\|_2 + \|\tilde{\mathbf{y}}\|_2$

9: **end while**

1.2.5 Numerical Test

We test our MFEM setup with two different scenarios. First, we test a pseudo 1D problem but with 2D elements equipped with three different porosity scenarios. Second, we test a more complex yet a more realistic problem representing Mid Ocean Ridge where no true solution is presented.

Problem Setup 1: Column Compaction.

In this problemsetup, we perform a convergence test on a 2D grid with a pseudo 1D problem. We study a compacting column in one direction. The column extends over $y \in [-L, L]$ and has no flow through top and bottom boundaries. We prescribe the following boundary conditions

- Bottom Edge;
  - Essential boundary condition:
$$\begin{cases} \check{\mathbf{v}}_s = \mathbf{0}; \\ \mathbf{b} = \mathbf{0}; \end{cases}$$
  - Essential boundary condition: Normal Darcy flux $\check{\mathbf{v}}_r \cdot \boldsymbol{\nu} = 0$;
- Left and Right side Edges;
  - y component of Stokes velocity is free, x component is kept as zero;
  - Darcy velocity, which is understood as flux is also kept zero;
  - normal flux dof fixed with a zero flux.
- Top Edge;
  - Stokes velocity $\check{\mathbf{v}}_s = \mathbf{0}$;
  - Darcy velocity $\check{\mathbf{v}}_l = \mathbf{0}$;
  - Normal flux is also determined to be zero.

We assume no velocity in x direction, $\check{\mathbf{v}}_s \cdot \mathbf{i} = 0$, and $\check{\mathbf{v}}_r \cdot \mathbf{i} = 0$, where $\mathbf{i}$ is the unit vector in x direction pointing from left to right. Let $u = \phi\check{\mathbf{v}}_r \cdot \mathbf{j}$ and $v = \check{\mathbf{v}}_s \cdot \mathbf{j}$, where $\mathbf{j}$ is the unit vector in y direction pointing upwards.

$$\begin{aligned} u + \phi^2 q_l' &= 0, \\ u' + \phi(q_l - q_s) &= 0, \\ [q_s - \frac{1}{3}(1-4\phi)v']' &= 1-\phi, \\ v' - \phi(q_f - q_s) &= 0, \end{aligned} \tag{1.48}$$

When no melting presents $\phi = 0$, the equations reduce to

$$u = -v = 0, \quad \text{and} \quad q_s' = 1, \quad \text{and} \quad q_l = 0. \tag{1.49}$$

When melting presents $\phi > 0$, the equations can be reduced to

$$\phi^{2+2\Theta}\left(\frac{3+\phi-4\phi^2}{3\phi}u'\right)' - u = \phi^{2+2\Theta}(1-\phi), \tag{1.50}$$

where all other quantities can be determined according to u as

$$v = -u, \quad \text{and} \quad q_l' = -\phi^{-2-2\Theta}u, \quad \text{and} \quad q_s = u'/\phi + q_l. \tag{1.51}$$

When ϕ is constant, we define an auxiliary function R as

$$R = \left(\phi^{2+2\Theta}\frac{3+\phi-4\phi^2}{3\phi}\right)^{-1/2}. \tag{1.52}$$

We test our MFEM code on three porosity settings, and use the closed form solutions derived in Arbogast et al. (2017).

- Constant porosity;

$$\phi_0(z) = \phi_0; \tag{1.53}$$

  Closed form solution:

$$\begin{aligned} u &= -\phi_0^2(1-\phi_0)\left[1 - \frac{\cosh(Rz)}{\cosh(RL)}\right], \\ v &= -u, \\ q_l &= (1-\phi_0)\left[z - \frac{1}{R}\frac{\sinh(Rz)}{\cosh(RL)}\right] + c, \\ q_s &= (1-\phi_0)\left[z - \frac{1-4\phi_0}{3+\phi_0-4\phi_0^2}\frac{\phi_0}{R}\frac{\sinh(Rz)}{\cosh(RL)}\right] + c, \end{aligned} \tag{1.54}$$

where c is a constant kernel.

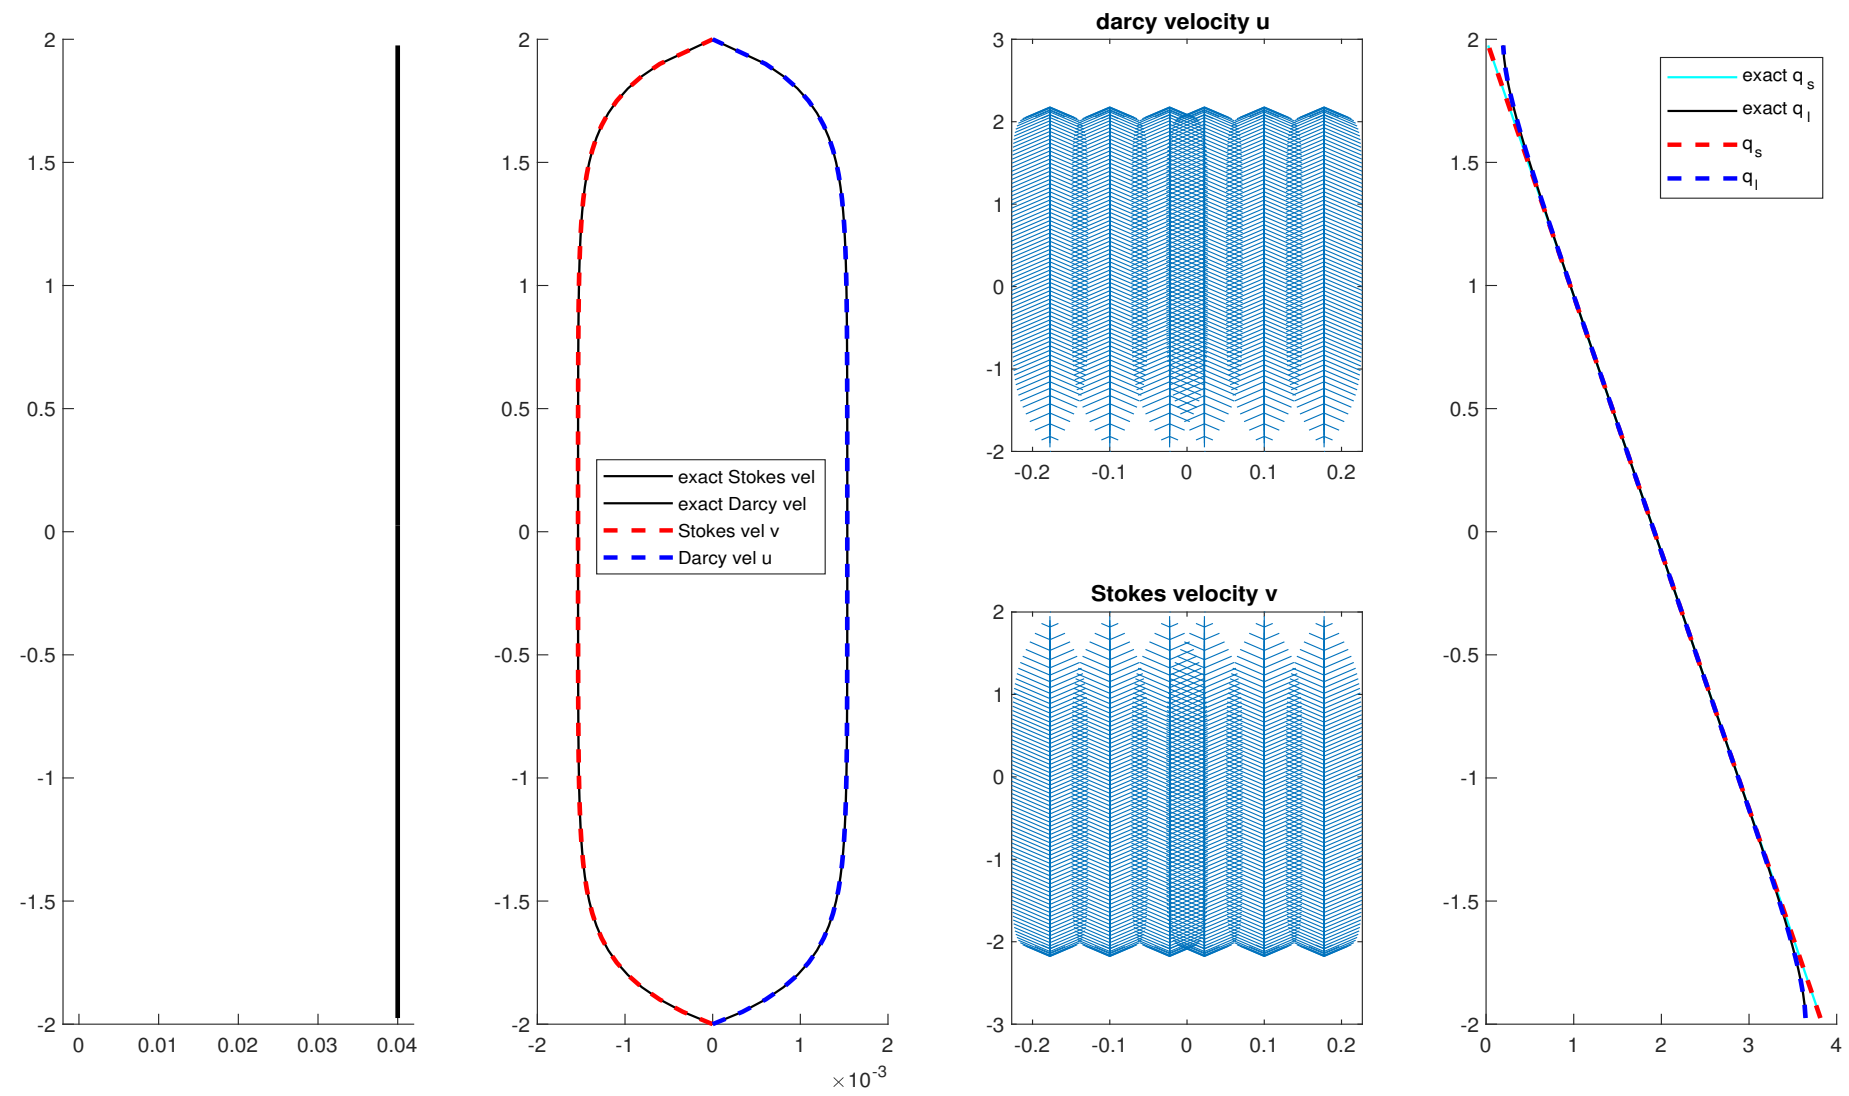

Figure 1.1: Constant porosity compaction column test.

	u		v		q_l		q_s	
$m \times n$	L^2 error	rate	L^2 error	rate	L^2 error	rate	L^2 error	rate
2×20	3.100e-05	-	3.100e-05	-	3.285e-03	-	3.638e-05	-
2×40	8.047e-06	1.95	8.047e-06	1.95	8.731e-04	1.91	9.671e-06	1.91
2×80	2.031e-06	1.99	2.031e-06	1.99	2.218e-04	1.98	2.457e-06	1.98
2×160	5.091e-07	2.00	5.091e-07	2.00	5.567e-05	1.99	6.166e-07	1.99

Table 1.1: Constant porosity compaction column test.

- Piecewise constant porosity;

$$\phi_J(z) = \begin{cases} 0 & \text{if } z > 0, \\ \phi_0 & \text{if } z \leq 0, \end{cases} \tag{1.55}$$

Closed form solution:

We conclude that $u = -v = 0$ when $z > 0$, and $q_l = 0$, $q_s = z + c$. When $z < 0$,

	u		v		q_l		q_s	
$m \times n$	L^2 error	rate	L^2 error	rate	L^2 error	rate	L^2 error	rate
2×20	2.980e-05	-	2.980e-05	-	3.794e-03	-	4.202e-05	-
2×40	7.681e-06	1.96	7.681e-06	1.96	1.005e-03	1.92	1.114e-05	1.92
2×80	1.958e-06	1.97	1.958e-06	1.97	2.472e-04	2.02	2.738e-06	2.02
2×160	4.974e-07	1.98	4.974e-07	1.98	5.972e-05	2.04	6.615e-07	2.05

Table 1.2: Piecewise Constant porosity compaction column test.

$\phi_0 \neq 0$,

$$
\begin{aligned}
u &= \phi_0^2(1-\phi_0)\left[1-\cosh(Rz)+\frac{1-\cosh(RL)}{\sinh(RL)}\sinh(Rz)\right],\\
v &= -u,\\
q_l &= -(1-\phi_0)\left[z-\frac{1}{R}\sinh(Rz)+\frac{1-\cosh(RL)}{R\sinh(RL)}\cosh(Rz)\right]+c,\\
q_s &= q_l+\frac{u'}{\phi_0}+c,
\end{aligned}
\tag{1.56}
$$

where c is a constant kernel shifting the pressure potential.

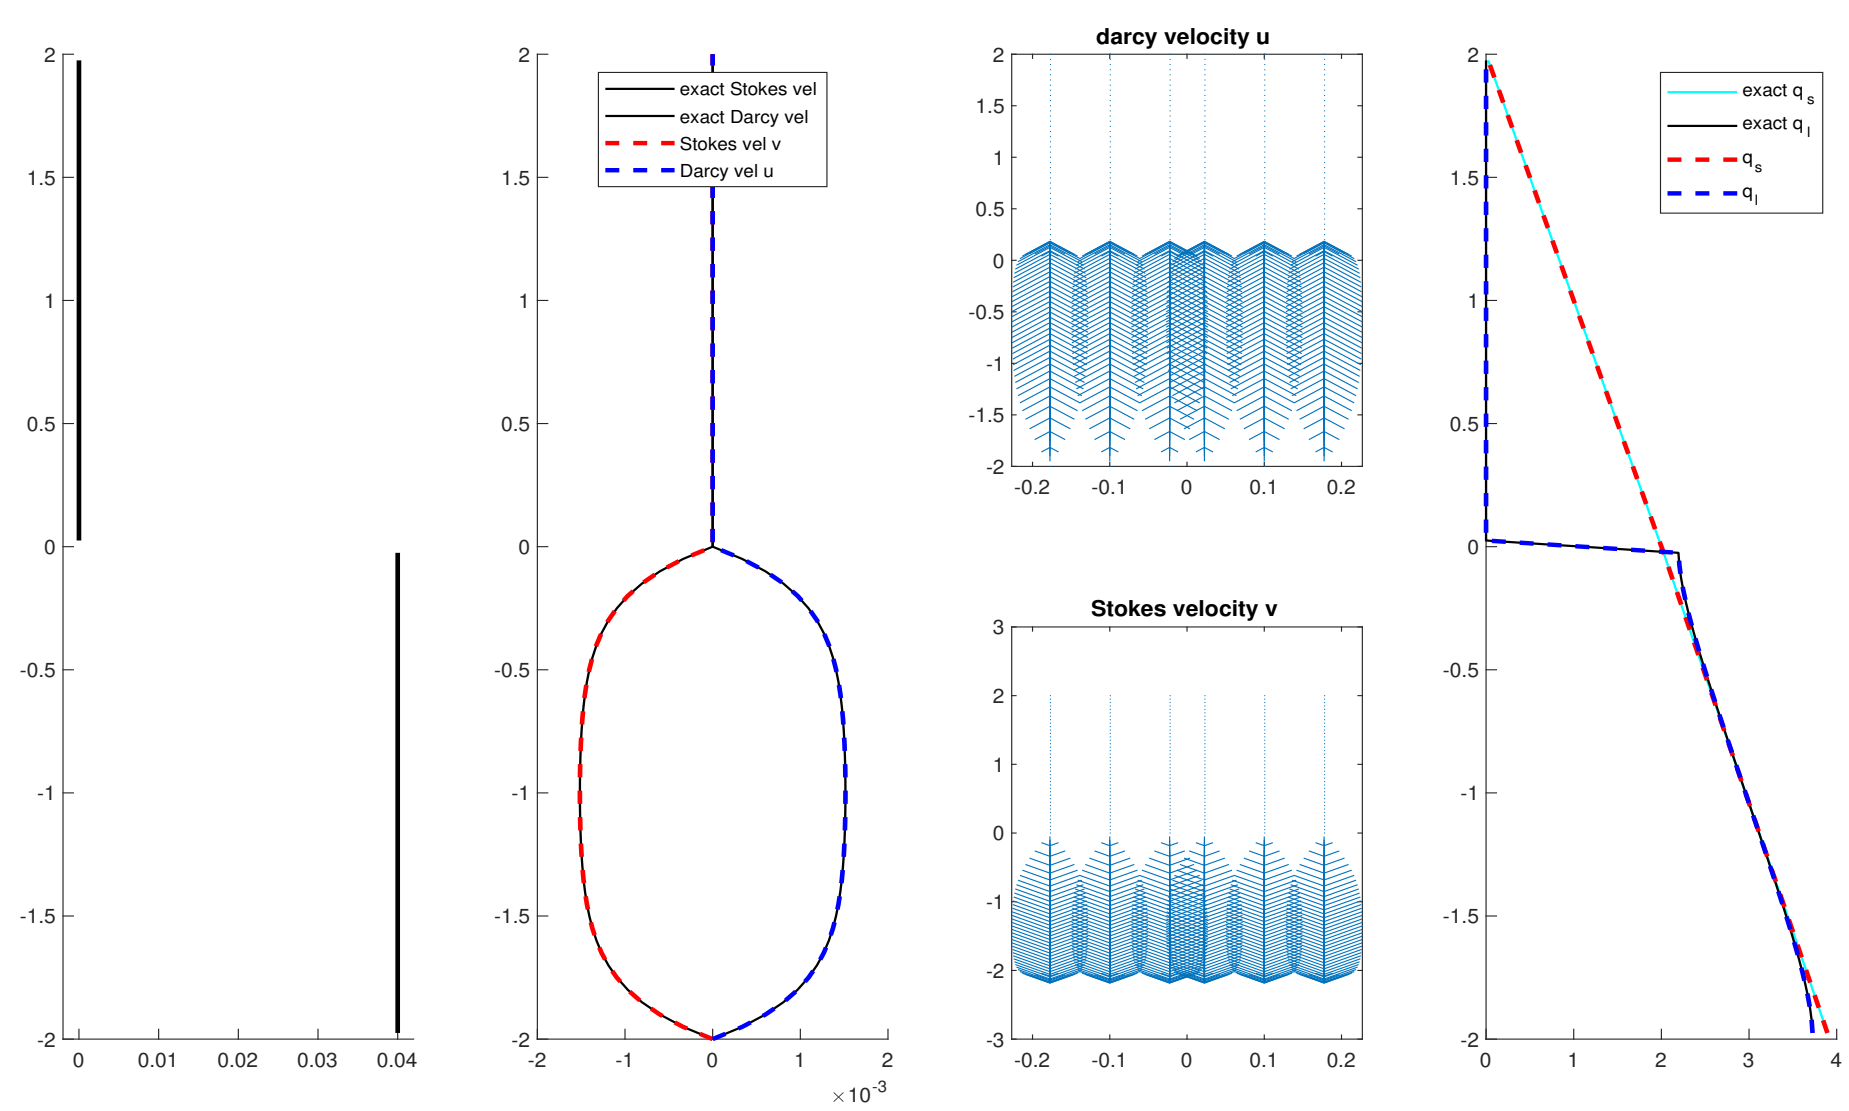

Figure 1.2: Piecewise constant porosity compaction column test.

- Quadratic porosity.

$$\phi_2(z) = \begin{cases} 0 & \text{if } \ z > 0, \\ \phi_0 z^2 & \text{if } \ z \leq 0, \end{cases} \tag{1.57}$$

Closed form solution:

We conclude that $u = -v = 0$ when $z > 0$.

$$\begin{aligned} u &= \frac{\phi_0^2}{1 - 4\phi_0}\left(L^{4-r_1} z^{r_1} - z^4\right), \\ v &= -v \\ q_l &= \frac{1}{1 - 4\phi_0}\left(z + \frac{L^{4-r_1}(-z)^{r_1 - 3}}{r_1 - 3}\right) + c, \\ q_s &= z + c, \end{aligned} \tag{1.58}$$

where

$$r_1 = \frac{3 + \sqrt{9 + 4/\phi_0}}{2}. \tag{1.59}$$

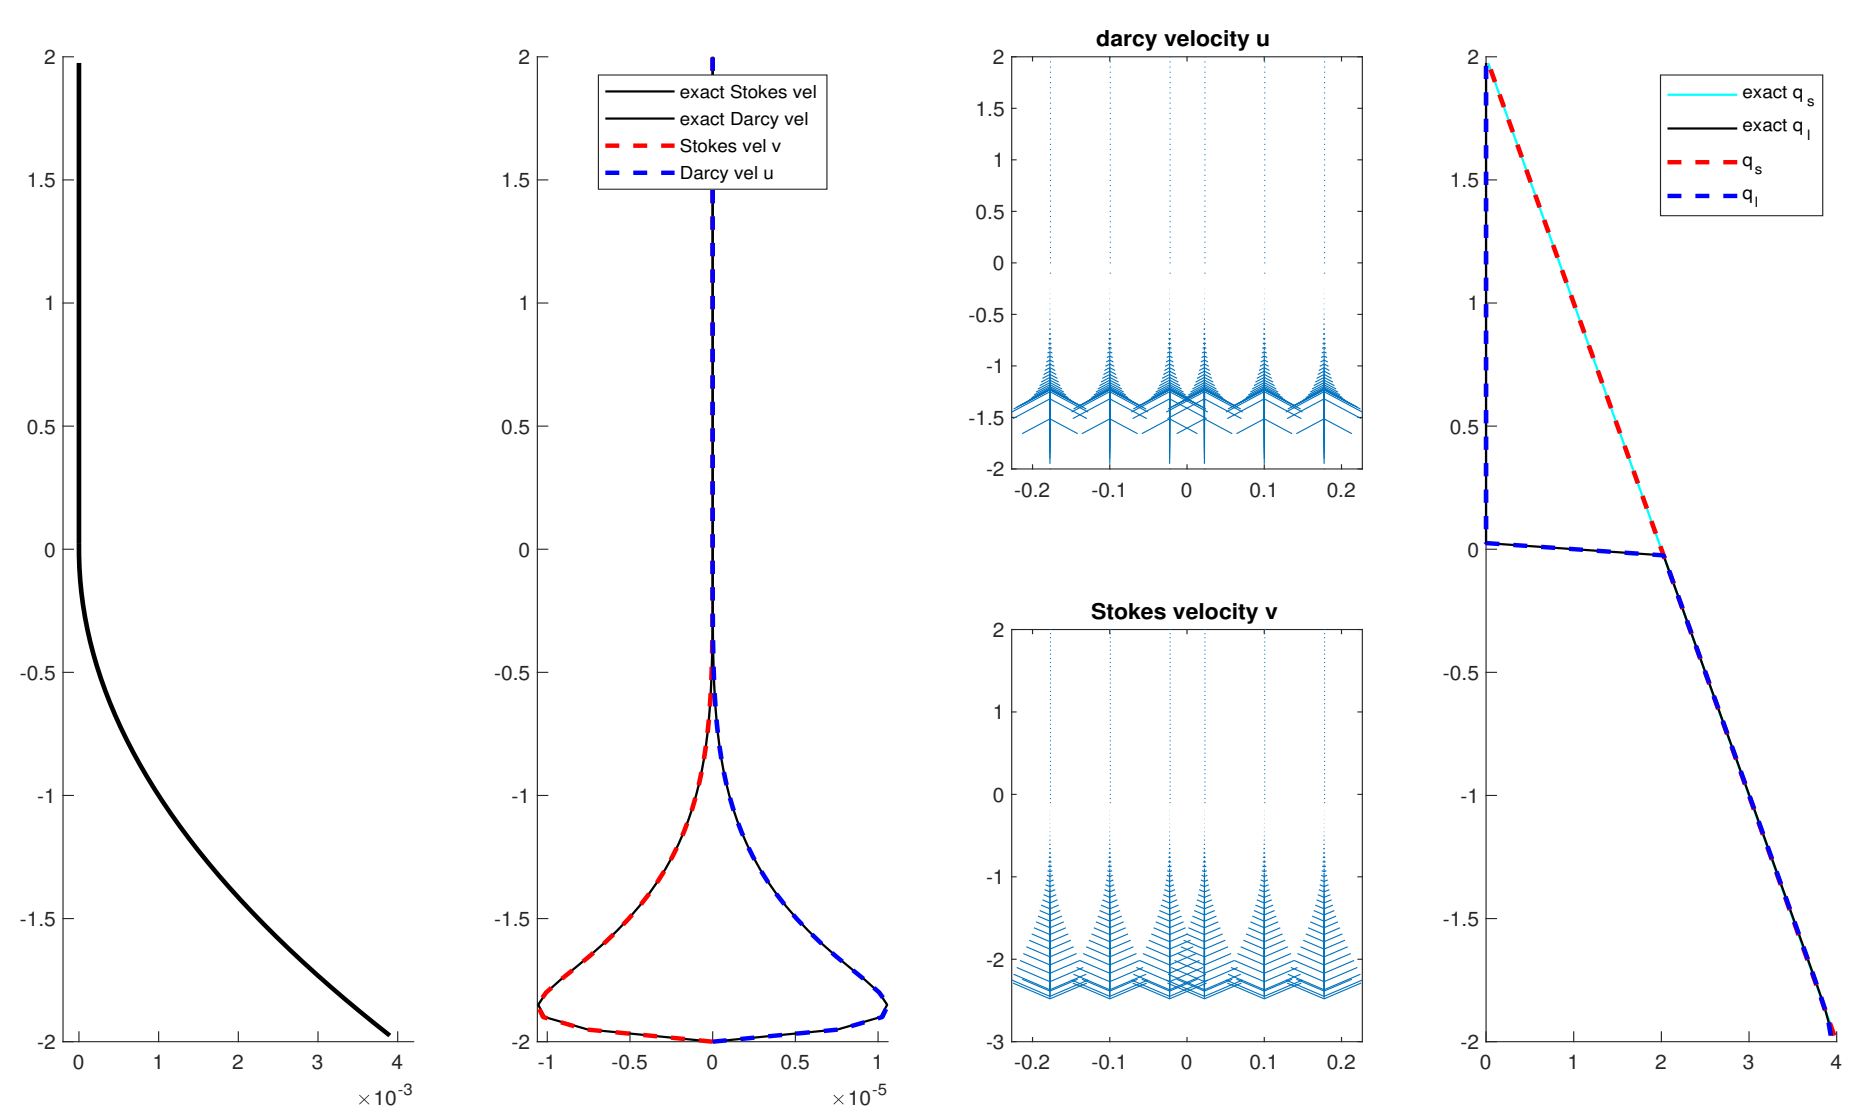

Figure 1.3: Quadratic porosity compaction column test.

In the previous literature, we made the assumption that $\phi = \phi_+ z^2 \ll 1$. Here, we present an alternative way of constructing approximation solution of the

	u		v		q_l		q_s	
$m \times n$	L^2 error	rate	L^2 error	rate	L^2 error	rate	L^2 error	rate
2×20	9.616e-07	-	9.616e-07	-				
2×40	3.212e-07	1.58	3.212e-07	1.58				
2×80	9.028e-08	1.83	9.028e-08	1.83				
2×160	2.746e-08	1.72	2.746e-08	1.72				

Table 1.3: Quadratic porosity compaction column test.

second order ODE (1.50). Let $v = u/\phi^2 = u/(\phi_+^2 z^4)$,

$$v' = \frac{-4v}{z} + \frac{u'}{\phi_+^2 z^4}. \tag{1.60}$$

Substitute u with v, we have

$$\frac{\phi_+}{3}\Big[\ \Big] \tag{1.61}$$

We assume that there exists a solution that can be represented as a sum of an infinity series. The solution can be understood as the sum of a particular solution and two homogenous power-series solution. Consider the homogenous equation

$$\phi \tag{1.62}$$

Problem Setup 2: Mid-Ocean Ridge.

We now reconsider the Mid-Ocean ridge test case in Arbogast et al. (2017). We solve the full system of equations on a dimensionless rectangular domain $x \in [-0.5, 0.5]$ and $z \in [-0.5, 0.0]$. The boundary conditions are imposed by assigning classical corner flow solution of Stokes velocity in Spiegelman and McKenzie (1987) as essential boundary condition all around the computational domain

$$\mathbf{v}_s = \frac{2U_0}{\pi(x^2+y^2)} \begin{pmatrix} \tan^{-1}(\frac{x}{-y})(x^2+y^2) + xy \\ z^2 \end{pmatrix}, \tag{1.63}$$

where $U_0 = 10^{-9}$m/s ≈ 3.2cm/yr is the constant upwelling velocity of mantle. According to mass conservation condition, we set no Darcy flux across the boundary.

We then set a not identically vanishing porosity by the formula

$$\phi(x,z) = \begin{cases} 0.05(\dfrac{0.375+y}{0.375})^2(1-\dfrac{|x|}{|y|+l}), & \text{if } |y| \le 0.375 \text{ and } |x| \le z+l, \\ 0, & \text{otherwise,} \end{cases} \tag{1.64}$$

where $l = 20\,\mathrm{m}$ is the offset set to avoid singularity computation at the center $x = 0$ we translate the coordinates x to $x - l$ if $x < 0$, and $x + l$ when $x > 0$. In Figure 1.4, we show the porosity distribution in the computational domain. Unlike the previous test conducted in the quarter plane where $x \in (0, 0.5]$, $y \in [-0.5, 0.0]$. We perform the numerical test within the entire plane instead.

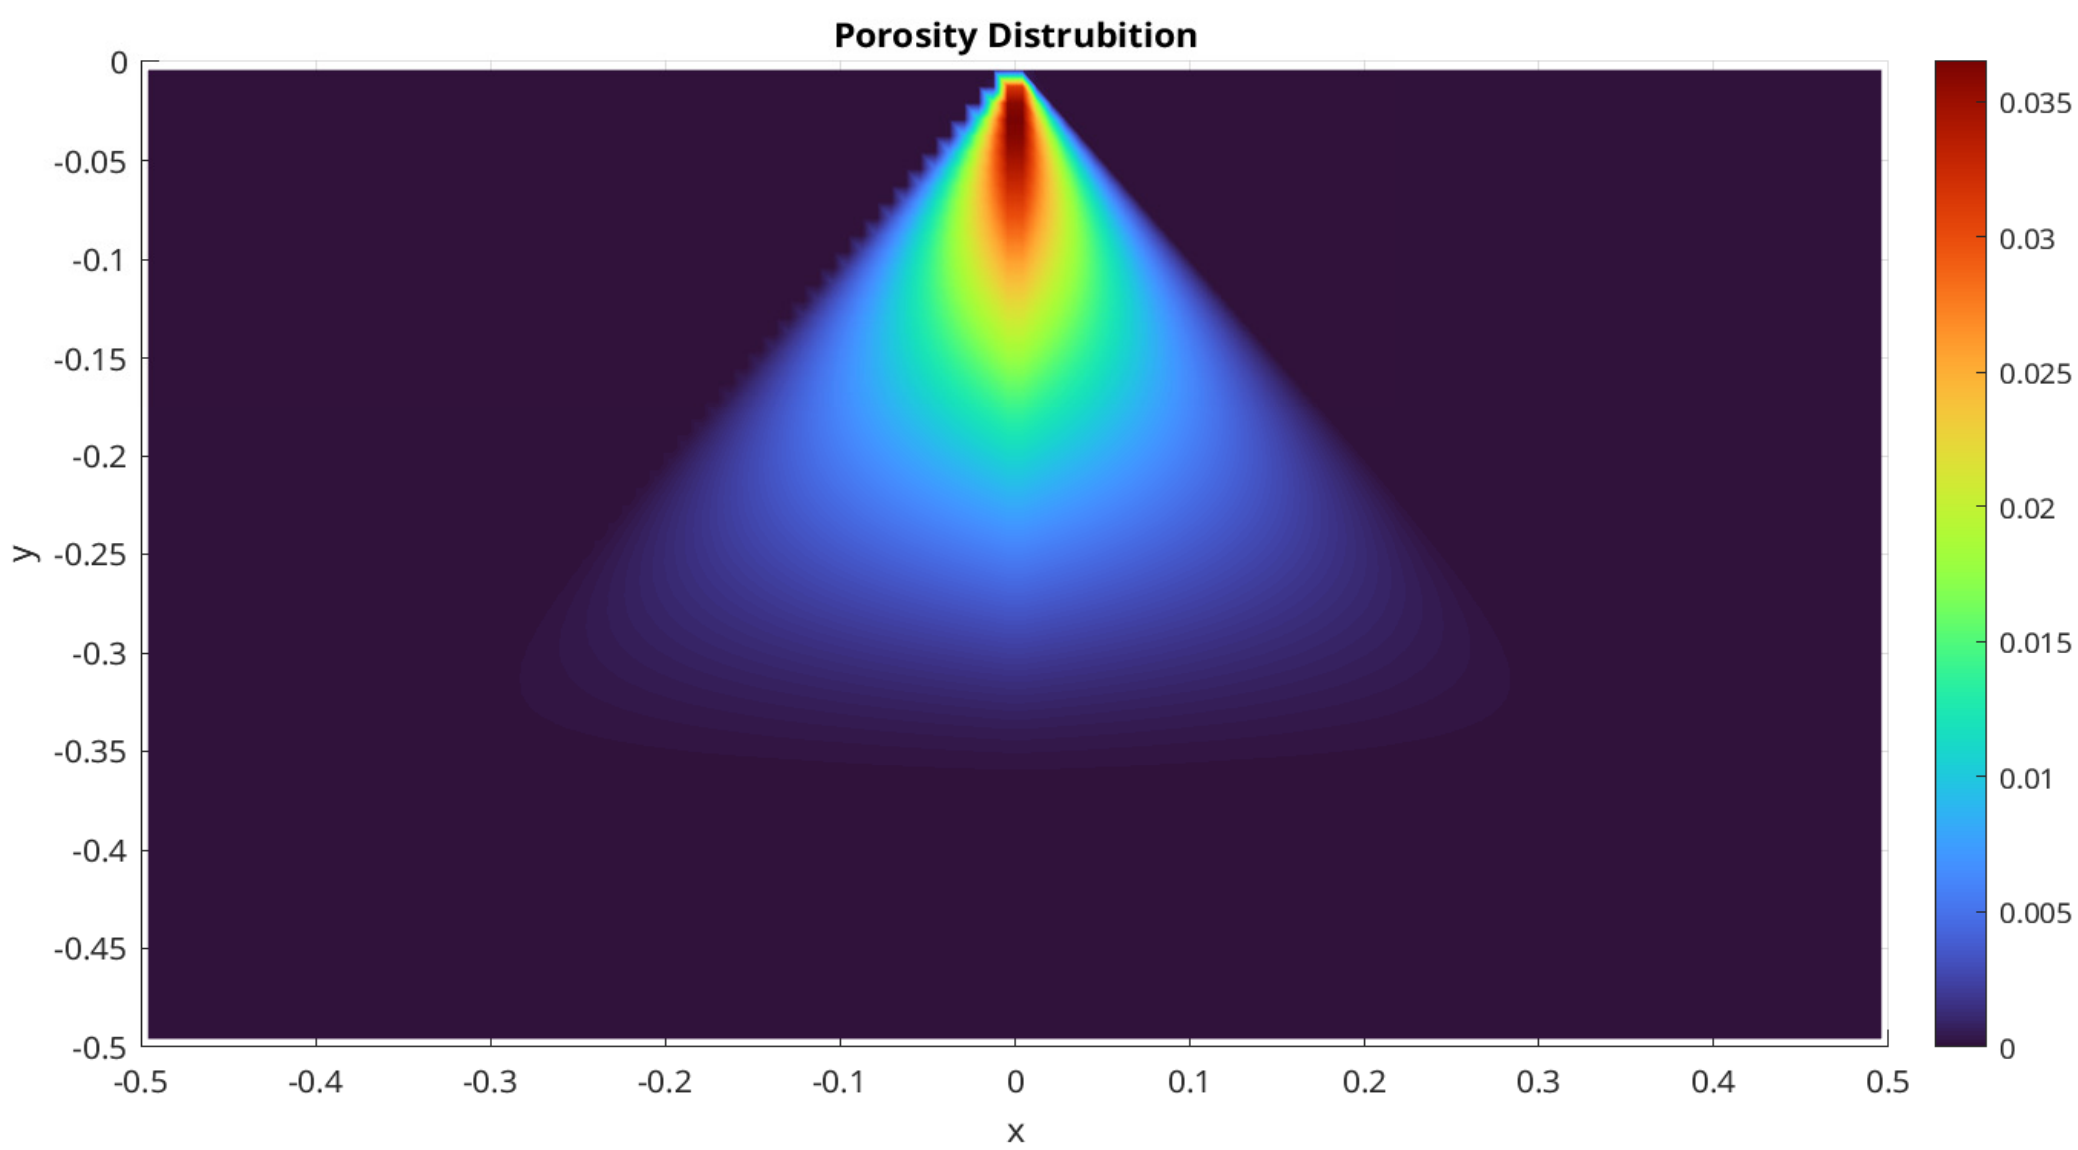

Figure 1.4: Porosity distribution.

In Figure 1.5 and Figure 1.6, we exhibit the nondimensional Stokes velocity $(\check{\mathbf{v}}_s, \check{q}_s)$ and Darcy velocity $(\phi\check{\mathbf{v}}_r, \check{q}_l)$ respectively. We observe the molten magma rise to the surface and focus to the region where most porosity presents. The solid matrix upwell from the bottom of the domain. We observe compaction at degree of melting (some porosity) where the buoyancy can no longer support the solid matrix on top of it due to density difference between solid and liquid. Despite of the presence of large no melting region, the system is solved successfully with modified Uzawa iteration

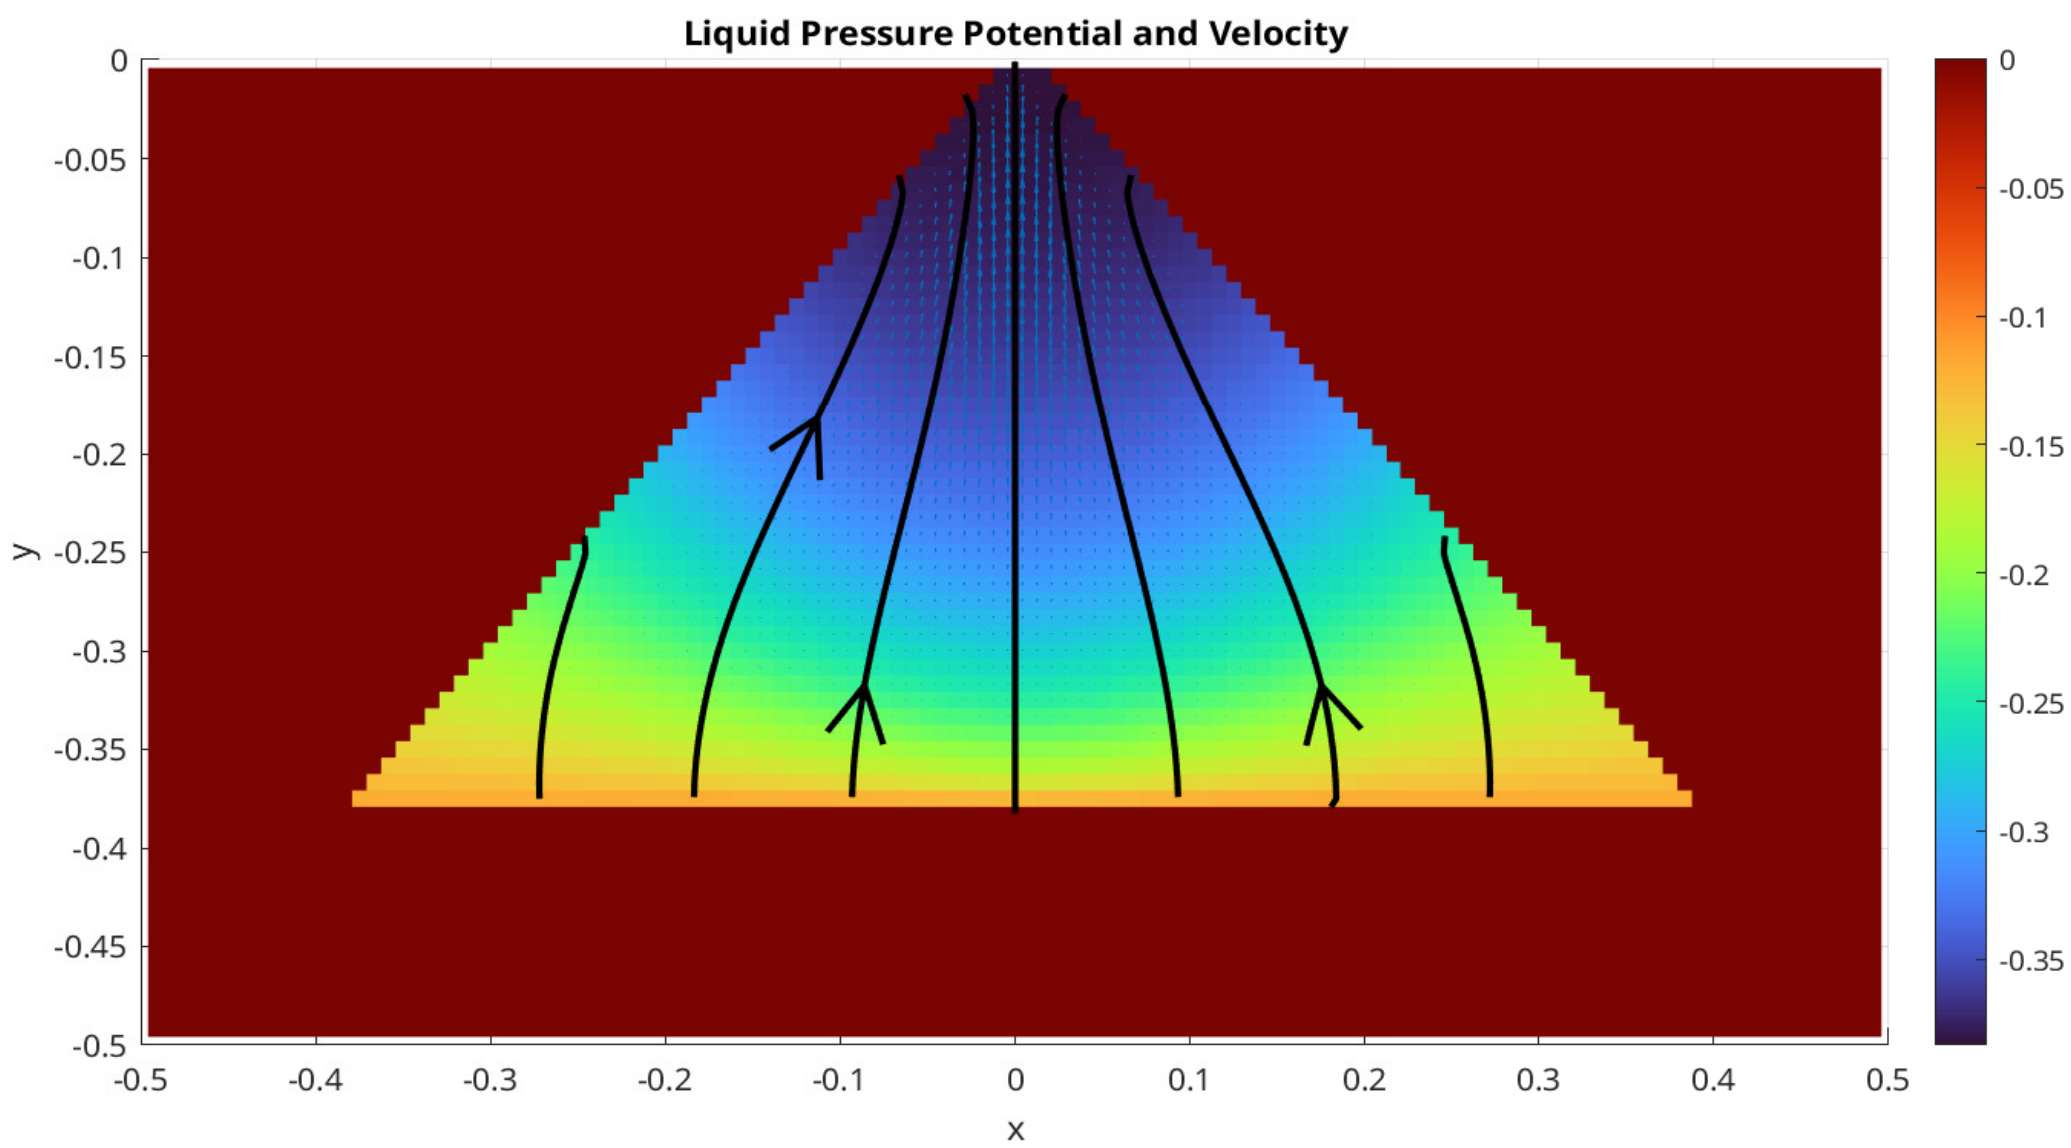

Figure 1.5: Liquid pressure potential and velocity.

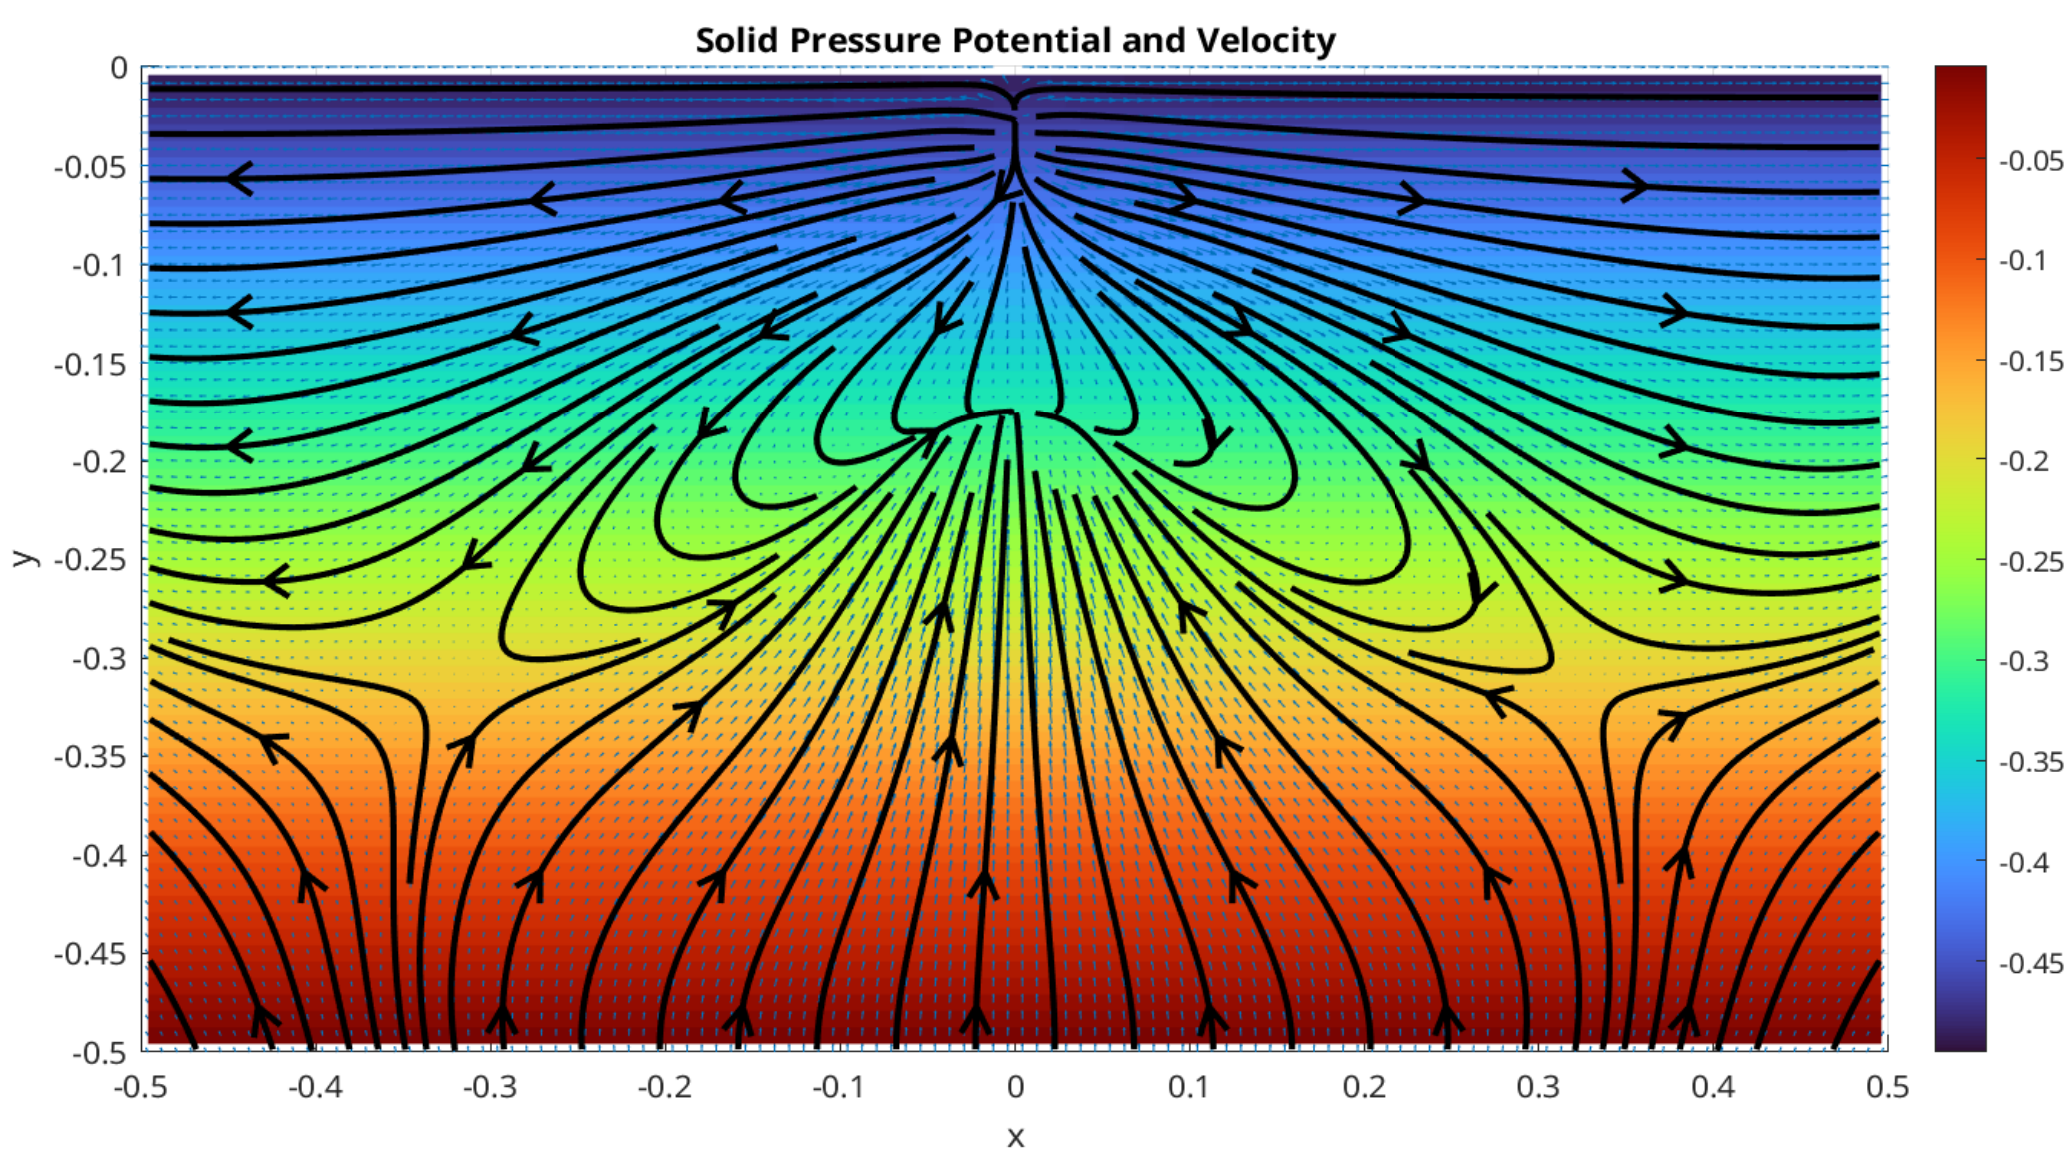

Figure 1.6: Solid pressure potential and velocity.

Works Cited

T. Arbogast, M. A. Hesse, and A. L. Taicher. Mixed methods for two-phase Darcy-Stokes mixtures of partially melted materials with regions of zero porosity. *SIAM J. Sci. Comput.*, 39(2):B375–B402, 2017. DOI 10.1137/16M1091095.

Todd Arbogast, Chieh-Sen Huang, and Chenyu Tian. A finite volume multilevel weno scheme for multidimensional scalar conservation laws. *Comput. Methods Appl. Mech. Engrg.*, 421, 2024.

Todd Arbogast, Chieh-Sen Huang, Chenyu Tian, and Gabirel M.Gray. An efficient and accurate approximation to the classic polynomial smoothness indicator. *In Preparation.*, 2025.

Michele Benzi, Gene H. Golub, and Jörg Liesen. Numerical solution of saddle point problems. *Acta Numerica*, 14:1–137, 2005. doi: 10.1017/S0962492904000212.

James H. Bramble, Joseph E. Pasciak, Apostol T, and Vassilev. Analysis of the inexact uzawa algorithm for saddle point problems. *SIAM. J. Numer. Anal.*, 34:1072–1092, 1997.

J.H. Bramble and S. R. Hilbert. Estimation of linear functionals on Sobolev spaces with application to Fourier transform and spline interpolation. *SIAM J. Numer. Anal.*, 7(1):112–124, 1970. doi: 10.1137/0707006.

Todd Dupont and Ridgway Scott. Polynomial approximation of functions in Sobolev spaces. *Mathematics of Computation*, 34(150):441–463, 1980.

Howard C. Elman and Gene H. Golub. Inexact and preconditioned uzawa algorithms for saddle point problems. *SIAM. J. Numer. Anal.*, 31:1645–1661, 1994.

Chieh-Sen Huang, Todd Arbogast, and Chenyu Tian. Multidimensional weno-ao reconstructions using a simplified smoothness indicator and applications to conservation laws. *J. Sci. Comput.*, 97, 2023.

Guang-Shan Jiang and Chi-Wang Shu. Efficient implementation of weighted eno schemes. *J. Comput. Phys.*, 126:202–228, 1996.

K.J.Arrow, L. Hurwicz, and H. Uzawa. *Studies in Linear and Nonlinear Programming*. Standford University Press, 1958.

Frank Olver. *Asymptotics and special functions*. AK Peters/CRC Press, 1997.

C. C. Paige and M. A. Saunders. Solution of sparse indefinite systems of linear equations. *SIAM Journal on Numerical Analysis*, 12(4):617–629, 1975. doi: 10.1137/0712047. URL `https://doi.org/10.1137/0712047`.

Marc Spiegelman and Dan McKenzie. Simple 2-d models for melt extraction at mid-ocean ridges and island arcs. *Earth and Planetary Science Letters*, 83(1): 137–152, 1987. ISSN 0012-821X. doi: https://doi.org/10.1016/0012-821X(87)90057-4. URL `https://www.sciencedirect.com/science/article/pii/0012821X87900574`.