

Chapter 1: Numerical Methods

In this chapter, we introduce a locally mass conserving numerical framework. A conforming mixed finite element method (MFEM) is proposed to solve the static Darcy-Stokes coupled methanics system. The proposed conforming MFEM captures the normal fluxes across element edges, ensuring compatibility with local mass conservation. The transport system is solved using a finite volume method (FVM), which inherently ensures local mass conservation.

We begin by introducing the mesh partition used for both the MFEM and the FVM schemes. Based on the mesh partition, two stable element pairs are presented, one for Darcy flow and one for Stokes flow. We then present a novel nonlinear WENO weighting scheme for the FVM. Error estimates are provided for both the MFEM and the FVM schemes.

1.1 Coupled Degenerate Darcy-Stokes System

Now we consider a scaled nondimensionalized degenerate Darcy-Stokes coupled boundary-value problem:

Find two velocity-pressure potential pairs $(\check{\mathbf{v}}_r, \check{q}_l)$ and $(\check{\mathbf{v}}_s, \check{q})$ such that

$$\check{\mathbf{v}}_r + \phi^{1+\Theta} \nabla (\phi^{-1/2} \check{q}_l) = 0, \quad (1.1)$$

$$\phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{v}}_r) + \frac{1}{1-\phi} (\check{q}_l - \phi^{1/2} \check{q}) = 0, \quad (1.2)$$

$$\nabla \check{q} - \nabla \cdot \check{\boldsymbol{\tau}}(\check{\mathbf{v}}_s) = -(1-\phi) \mathbf{n}, \quad (1.3)$$

$$\nabla \cdot \check{\mathbf{v}}_s - \frac{\phi^{1/2}}{1-\phi} (\check{q}_l - \phi^{1/2} \check{q}) = 0, \quad (1.4)$$

and

$$\begin{aligned}
\check{\mathbf{v}}_r &= \mathbf{g}_r & \text{on } \Gamma_{u,D}, \\
\check{\mathbf{v}}_s &= \mathbf{g}_s & \text{on } \Gamma_{u,S}, \\
p &= p_0 & \text{on } \Gamma_{i,D}, \\
\boldsymbol{\tau} \cdot \boldsymbol{\nu} - p &= \mathbf{t}_0 & \text{on } \Gamma_{i,S},
\end{aligned} \tag{1.5}$$

where $\Gamma_{u,D}$ and $\Gamma_{u,S}$ denote the part of boundary we assign essential boundary conditions for Darcy and Stokes problem respectively, and $\Gamma_{i,D}$ and $\Gamma_{i,S}$ represent the part of boundary we assign natural boundary conditions respectively. We have $\Gamma_{u,D} \cup \Gamma_{i,D} = \partial\Omega$ and $\Gamma_{u,S} \cup \Gamma_{i,S} = \partial\Omega$.

We expand the gradient term in equation (1.1) and the divergence term in equation (1.2) as

$$\begin{aligned}
\phi^{1+\Theta} \nabla (\phi^{-1/2} \check{q}_l) &= \phi^{1/2+\Theta} \nabla \check{q}_l + \phi^{\Theta-1/2} \check{q}_l \nabla \phi, \\
\phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{v}}_r) &= \phi^{1/2+\Theta} \nabla \cdot \check{\mathbf{v}}_r + \phi^{\Theta-1/2} \nabla \phi \cdot \check{\mathbf{v}}_r,
\end{aligned} \tag{1.6}$$

where they are well-defined provided that

$$\phi^{\Theta-1/2} \nabla \phi \in (L^\infty(\Omega))^2. \tag{1.7}$$

A scaled Hilbert space is defined as follows for this specific scaled formulation, where the scaled velocity $\check{\mathbf{v}}_r$ should lie in.

Definition 1.1. Consider a scaled Hilbert space:

$$\mathbb{V}_D^\phi = H_\phi(\text{div}; \Omega) = \left\{ \mathbf{v} \in (L^2(\Omega))^2 : \phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \mathbf{v}) \in L^2(\Omega) \right\}, \tag{1.8}$$

which is a Hilbert space equipped with the inner product

$$(\mathbf{u}, \mathbf{v})_{\mathbb{V}_D^\phi} = (\mathbf{u}, \mathbf{v}) + (\phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \mathbf{u}), \phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \mathbf{v})). \tag{1.9}$$

The normal trace on $\partial\Omega$ is well-defined as

$$\left\| \phi^{1/2+\Theta} \mathbf{v} \cdot \boldsymbol{\nu} \right\|_{H^{-1/2}(\partial\Omega)} < C_\Omega \left\{ \|\mathbf{v}\|_{L^2(\Omega)} + \left\| \phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \mathbf{v}) \right\|_{L^2(\Omega)} \right\} \tag{1.10}$$

subsequently, we have the space $H_\phi^{-1/2}(\text{div}; \partial\Omega)$ understood as the image of this normal trace operator.

1.1.1 The weak formulation

We define the following function spaces for the scaled Darcy-Stokes coupled system as

$$\begin{aligned}
\mathbb{V}_D^\phi &= \left\{ \mathbf{v} \in H_\phi(\text{div}; \Omega) : \phi^{1/2+\Theta} \mathbf{v} \cdot \boldsymbol{\nu} = \mathbf{0} \text{ on } \Gamma_{u,D} \right\}, \\
\mathbb{U}_D^\phi &= \left\{ \mathbf{u} \in H_\phi(\text{div}; \Omega) : \phi^{1/2+\Theta} \mathbf{u} \cdot \boldsymbol{\nu} = \mathbf{g}_r \text{ on } \Gamma_{u,D} \right\} = \tilde{\mathbf{g}}_r + \mathbb{V}_D^\phi, \\
\mathbb{W}_D &= L^2(\Omega), \\
\mathbb{V}_S &= \left\{ \mathbf{v} \in (H^1(\Omega))^2 : \mathbf{v} = \mathbf{0} \text{ on } \Gamma_{u,S} \right\}, \\
\mathbb{U}_S &= \left\{ \mathbf{u} \in (H^1(\Omega))^2 : \mathbf{u} = \mathbf{g}_s \text{ on } \Gamma_{u,S} \right\} = \tilde{\mathbf{g}}_s + \mathbb{V}_S, \\
\mathbb{W}_S &= L^2(\Omega),
\end{aligned} \tag{1.11}$$

where each space is equipped with their natural norms. Here, $\tilde{\mathbf{g}}_r$ and $\tilde{\mathbf{g}}_s$ are finite energy lift of Dirichlet data $\mathbf{g}_r$ and $\mathbf{g}_s$ respectively.

We understand the boundary values in the sense of Trace Theorem ?? and the scaled normal trace operator (1.10). We assume regularity for Dirichlet data $\mathbf{g}_r \in (H_\phi^{1/2}(\text{div}; \Gamma_{u,D}))^2$ and $\mathbf{g}_s \in (H^{1/2}(\Gamma_{u,S}))^2$. We understand $\tilde{\mathbf{g}}_r \in H_\phi(\text{div}; \Omega)$ and $\tilde{\mathbf{g}}_s \in (H^1(\Omega))^2$ as a continuous extension from the boundary into the domain.

A compatibility condition enforcing mass conservation on the entire domain is needed if essential boundary condition is prescribed on the entire boundary $\partial\Omega$, i.e., when $\Gamma_{u,D} = \Gamma_{u,S} = \partial\Omega$ the Dirichlet data satisfies

$$\int_{\partial\Omega} (\mathbf{g}_r + \mathbf{g}_s) \cdot \boldsymbol{\nu} \, ds = 0. \tag{1.12}$$

The standard mixed form for the proposed coupled system reads as follows:

Find $\check{\mathbf{v}}_r \in \mathbb{U}_D^\phi$, $\check{q}_l \in \mathbb{W}_D$, $\check{\mathbf{v}}_s \in \mathbb{U}_S$, and $\check{q} \in \mathbb{W}_S$ such that

$$(\check{\boldsymbol{\tau}}(\mathbf{v}_s), \nabla \boldsymbol{\psi}_s) - (\check{q}, \nabla \cdot \boldsymbol{\psi}_s) = -((1 - \phi)\mathbf{n}, \boldsymbol{\psi}_s) \quad \forall \boldsymbol{\psi}_s \in \mathbb{V}_S, \quad (1.13)$$

$$(\nabla \cdot \check{\mathbf{v}}_s, \omega) + \left(\frac{\phi^{1/2}}{1 - \phi} (\check{q}_l - \phi^{1/2} \check{q}), \omega \right) = 0 \quad \forall \omega \in \mathbb{W}_S, \quad (1.14)$$

$$(\check{\mathbf{v}}_r, \boldsymbol{\psi}_r) - (\check{q}_l, \phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{v}}_r)) = 0, \quad \forall \boldsymbol{\psi}_r \in \mathbb{V}_D^\phi, \quad (1.15)$$

$$(\phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{v}}_r), \omega_f) + \left(\frac{1}{1 - \phi} (\check{q}_l - \phi^{1/2} \check{q}), \omega_f \right) = 0 \quad \forall \omega_f \in \mathbb{W}_D. \quad (1.16)$$

We state well-posedness result of the scaled model as follows.

Lemma 1.1. (*Existence and Uniqueness*)

Assume the condition (1.7) holds, $0 \leq \phi \leq \phi^* < 1$. There exists a unique solution to the scaled formulation (1.13)–(1.16), and it satisfies

$$\begin{aligned} & \|\check{\mathbf{v}}_r\|_{(L^2(\Omega))^2} + \|\phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{v}}_r)\|_{(L^2(\Omega))^2} + \|\check{q}_l\|_{(L^2(\Omega))^2} + \|\check{\mathbf{v}}_s\|_{(H^1(\Omega))^2} + \|\check{q}\|_{(L^2(\Omega))^2} \\ & \leq C \{ |\rho_r| + \|\check{\mathbf{g}}_r\|_{(L^2(\Omega))^2} + \|\phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{g}}_r)\|_{(L^2(\Omega))^2} + \|\check{\mathbf{g}}_s\|_{H^1(\Omega)} \}. \end{aligned} \quad (1.17)$$

Proof. See Arbogast et al. (2017). □

1.1.2 The scaled mixed finite element method

We discretize the scaled mixed formulation with two space pairs $\mathbb{V}_{D,h} \times \mathbb{W}_{D,h} \subset H(\text{div}; \Omega) \times L^2(\Omega)$ and $\mathbb{V}_{S,h} \times \mathbb{W}_{S,h} \subset (H^1(\Omega))^2 \times L^2(\Omega)$. Recall the aforementioned inf-sup stable mixed finite element space pairs on $E \in \mathcal{T}_h$:

- For the Darcy part of the system.

$$\begin{aligned} \mathbb{V}_{D,h}(E) &= \mathbb{V}_1^0(E) = (\mathbb{P}_1(E))^2 \oplus \text{curl } \mathbb{S}_2^{\mathcal{DS}}(E) \\ \mathbb{W}_{D,h}(E) &= \mathbb{W}(E) = \mathbb{P}_0(E) \end{aligned} \quad (1.18)$$

- For the Stokes part of the system.

$$\begin{aligned}\mathbb{V}_{S,h}(E) &= \mathbb{V}_1^{\text{BR}}(E) = (\mathcal{DS}_1(E))^2 \oplus \text{span}\{\mathbf{b}_0, \mathbf{b}_1, \mathbf{b}_2, \mathbf{b}_3\} \\ \mathbb{W}_{S,h}(E) &= \mathbb{W}(E) = \mathbb{P}_0(E).\end{aligned}\tag{1.19}$$

We can impose essential boundary conditions by projecting extensions $\tilde{\mathbf{g}}_r$ and $\tilde{\mathbf{g}}_s$ into the finite element spaces as $\hat{\mathbf{g}}_r \in \mathbb{V}_{D,h}$ and $\hat{\mathbf{g}}_s \in \mathbb{V}_{S,h}$.

We state the scaled mixed finite element method as:

Find $\check{\mathbf{v}}_{r,h} \in \mathbb{V}_1^0 + \hat{\mathbf{g}}_r$, $(\check{q})_{r,h} \in \mathbb{W}_D$, $\mathbf{v}_{s,h} \in \mathbf{V}_S + \hat{\mathbf{g}}_s$ and $\check{q}_h \in \mathbb{W}_S$ such that

$$(\check{\boldsymbol{\tau}}(\mathbf{v}_{s,h}), \nabla \boldsymbol{\psi}_s) - (\check{q}_h, \nabla \cdot \boldsymbol{\psi}_s) = -((1 - \phi)\mathbf{n}, \boldsymbol{\psi}_s) \quad \forall \boldsymbol{\psi}_s \in \mathbb{V}_1^{\text{BR}}, \tag{1.20}$$

$$(\nabla \cdot \check{\mathbf{v}}_{s,h}, \omega) - \left(\frac{\phi^{1/2}}{1 - \phi} (\check{q}_{l,h} - \phi^{1/2} \check{q}_h), \omega \right) = 0 \quad \forall \omega \in \mathbb{W}_0^{\text{BR}}, \tag{1.21}$$

$$(\check{\mathbf{v}}_{r,h}, \boldsymbol{\psi}_r) - (\check{q}_{l,h}, \phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \boldsymbol{\psi}_{r,h})) = 0, \quad \forall \boldsymbol{\psi}_r \in \mathbb{V}_1^0, \tag{1.22}$$

$$\begin{aligned}(\phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{v}}_{r,h}), \omega_f) + \left(\frac{1}{1 - \phi} (\check{q}_{l,h} - \phi^{1/2} \check{q}_h), \omega_f \right) &= 0 \\ \forall \omega_f \in \mathbb{W}_0.\end{aligned}\tag{1.23}$$

1.1.3 Local Mass Conservation

Before we continue the discussion, we need to make sure the formulation is well-defined by not dividing by zero. The term $\phi^{-1/2}$ in the symmetric equations (1.22) and (1.23) causes trouble when there is no melting, i.e., $\phi = 0$. In order to deal with it, we first define a element-averaged $\bar{\phi}_E$ as

$$\bar{\phi}_E = \frac{1}{|E|} \int_E \phi(\mathbf{x}) d\mathbf{x}, \tag{1.24}$$

where $|E|$ is the area of element E . Let

$$\phi_E = \begin{cases} \bar{\phi}_E & \text{if } \bar{\phi}_E \neq 0, \\ 0 & \text{if } \bar{\phi}_E = 0. \end{cases} \tag{1.25}$$

We now replace the $\phi^{-1/2}$ with $\phi_E^{-1/2}$. Then we expand the integral with divergence theorem as

$$\begin{aligned}\int_E \phi_E^{-1/2} \nabla \cdot (\phi^{1+\Theta} \boldsymbol{\psi}_{r,h}) \omega_l &= \int_{\partial E} \phi_E^{-1/2} \phi^{1+\Theta} \boldsymbol{\psi}_{r,h} \cdot \boldsymbol{\nu} \omega_f ds \\ &\quad - \int_E \phi_E^{-1/2} \phi^{1+\Theta} \boldsymbol{\psi}_{r,h} \cdot \nabla \omega_l d\mathbf{x}.\end{aligned}\tag{1.26}$$

The second term vanishes when ω_l is constant on element E . We define an auxiliary auxiliary space ω_E begin 1 on E and 0 elsewhere. We sum equations (1.21) and (1.23) together assuming that $\omega = \omega_E \in \mathbb{W}_S$ and $\omega_l = \phi_E^{-1/2} \omega_E \in \mathbb{W}_D$. We now propose our local mass conserved version by replacing the term $\phi^{1/2}$ in equation (1.21) with $\phi_E^{1/2}$ as

$$(\check{\tau}(\mathbf{v}_{s,h}), \nabla \boldsymbol{\psi}_s) - (\check{q}_h, \nabla \cdot \boldsymbol{\psi}_s) = -((1 - \phi)\mathbf{n}, \boldsymbol{\psi}_s) \quad \forall \boldsymbol{\psi}_s \in \mathbb{V}_1^{\mathcal{BR}}, \quad (1.27)$$

$$(\nabla \cdot \check{\mathbf{v}}_{s,h}, \omega) - \left(\frac{\phi \phi_E^{-1/2}}{1 - \phi} (\check{q}_{l,h} - \phi_E^{1/2} \check{q}_h), \omega \right) = 0 \quad \forall \omega \in \mathbb{W}_0^{\mathcal{BR}}, \quad (1.28)$$

$$(\check{\mathbf{v}}_{r,h}, \boldsymbol{\psi}_r) - (\check{q}_{l,h}, \phi_E^{-1/2} \nabla \cdot (\phi^{1+\Theta} \boldsymbol{\psi}_{r,h})) = 0, \quad \forall \boldsymbol{\psi}_r \in \mathbb{V}_1^0, \quad (1.29)$$

$$(\phi_E^{-1/2} \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{v}}_{r,h}), \omega_f) + \left(\frac{\phi \phi_E^{-1}}{1 - \phi} (\check{q}_{l,h} - \phi_E^{1/2} \check{q}_h), \omega_f \right) = 0 \quad \forall \omega_f \in \mathbb{W}_0. \quad (1.30)$$

To see local mass conservation of the fluid, let $E \in \mathcal{T}_h$ be any element. The equation (1.30) gives

$$\int_E \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{v}}_{r,h}) d\mathbf{x} + \int_E \frac{\phi}{1 - \phi} (\check{q}_{l,h} - q_h) dx = 0, \quad (1.31)$$

and the equation (1.28) gives

$$\int_E \nabla \cdot \mathbf{v}_{s,h} d\mathbf{x} - \int_E \frac{\phi}{1 - \phi} (q_{l,h} - q_h) dx = 0. \quad (1.32)$$

By summing the two individual equations above, we can achieve local mass conservation of the phase averaged mixture as

$$\int_E \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{v}}_r + \check{\mathbf{v}}_s) d\mathbf{x} = 0. \quad (1.33)$$

1.1.4 Convergence Rate

The existence of a unique solution can be shown

We derive a bound for the error by taking the difference of

We use the projection operators defined in

1.2 Saddle Point System

Saddle point system is widely spread in technical and science scenarios, such as constrained optimization problem, image reconstruction and optimal control. Saddle point system has been widely and systematically studied, e.g., by Benzi et al. (2005). In our case, saddle point system is formed along with the Mixed Finite Element discretization. In this section, we give a brief overview of properties of a saddle point system and some common ways to solve such system. An abstract saddle point system can be represented as

$$\begin{bmatrix} \mathbf{A} & \mathbf{B} \\ \mathbf{B}^T & -\mathbf{C} \end{bmatrix} \begin{bmatrix} \mathbf{x} \\ \mathbf{y} \end{bmatrix} = \begin{bmatrix} \mathbf{f} \\ \mathbf{g} \end{bmatrix}. \quad (1.34)$$

Assuming the following properties:

- $\mathbf{A}$ is symmetric: $\mathbf{A} = \mathbf{A}^T$;
- $\mathbf{A}$ is nonsingular: $\mathbf{A}^{-1}$ exists;
- $\mathbf{C}$ is symmetric and positive semidefinite;
- $\mathbf{B}$ is rank deficient.

1.2.1 Reduced Linear System

Now we discuss the saddle point system (SPS) induced by MFEM method in details including the boundary conditions. To begin with, we regroup dofs according to the boundary condition.

$$\mathbf{A} = \begin{bmatrix} \mathbf{A}_K & \mathbf{A}_M \\ \mathbf{A}_M^T & \mathbf{M} \end{bmatrix}, \quad (1.35)$$

where $\mathbf{A}_K$ consists of interaction within interior dofs and natural boundary condition dofs, and $\mathbf{A}_M$ consists of interaction between interior dofs, natural boundary dofs and essential boundary dofs.

We perform the same treatment for matrix $\mathbf{B}$ and right hand side vector $\mathbf{f}$, by regrouping dofs according to its interaction with boundary conditions.

$$\mathbf{B} = \begin{bmatrix} \mathbf{B}_K \\ \mathbf{B}_M \end{bmatrix}, \text{ and } \mathbf{F} = \begin{bmatrix} \mathbf{F}_K \\ \mathbf{F}_M \end{bmatrix} \quad (1.36)$$

We rewrite the linear system with the regrouped dofs and form a reduced system as

$$\begin{bmatrix} \mathbf{A}_K & \mathbf{B}_K \\ \mathbf{B}_K^T & -\mathbf{C} \end{bmatrix} \begin{bmatrix} \mathbf{x} \\ \mathbf{y} \end{bmatrix} = \begin{bmatrix} \mathbf{F}_K - \mathbf{A}_M \mathbf{g} - \mathbf{g}_N \\ \mathbf{G} - \mathbf{B}_M^T \mathbf{g} \end{bmatrix}, \quad (1.37)$$

where $\mathbf{g}$ denotes the values prescribed for essential boundary, and $\mathbf{g}_N$ is the vector generated by the natural boundary condition part. The reformed reduced system is still a saddle point system.

Now we take a closer look at the formed linear system. The no melting (zero porosity $\phi = 0$) region adds difficulties to solving the formed saddle point system. On one hand, the existence of zero porosity region guarantees that $\mathbf{B}$ matrix formed in Darcy system does not have full column rank. Therefore the schur complement

$$\mathbf{S} = -(\mathbf{C} + \mathbf{B}\mathbf{A}^{-1}\mathbf{B}^T),$$

is usually not invertible directly. On the other hand, in addition to the constant null space induced by gradient of pressure, the null space of $\mathbf{B}$ matrix $\ker(\mathbf{B})$ in our darcy problem is not fixed due to evolution of melting (change of zero porosity region).

Taking into consideration that the solver will be implemented in parallel, an iterative solver is more suitable than direct solver.

1.2.2 Schur Complement

To begin with, we discuss a "direct" way to solve this derived saddle point system. Now consider a general saddle point system (1.34) with symmetric positive-definite matrix $\mathbf{A}$ as

$$\begin{aligned} \mathbf{A}\mathbf{x} + \mathbf{B}\mathbf{y} &= \mathbf{f}, \\ \mathbf{B}^T\mathbf{x} - \mathbf{C}\mathbf{y} &= \mathbf{g}. \end{aligned} \quad (1.38)$$

We represent the solution vector $\mathbf{x}$ as

$$\mathbf{x} = \mathbf{A}^{-1}(\mathbf{f} - \mathbf{B}\mathbf{y}), \quad (1.39)$$

where $\mathbf{A}^{-1}$ is computed with conjugate gradient algorithm. We then eliminate $\mathbf{x}$ to represent $\mathbf{y}$ as

$$\mathbf{y} = \mathbf{S}^{-1}(\mathbf{g} - \mathbf{B}^T\mathbf{A}^{-1}\mathbf{f}), \quad (1.40)$$

where $\mathbf{S}^{-1}$ is computed with Minimal Residual algorithm Paige and Saunders (1975) due to the formed Schur complement being a symmetric indefinite system.

1.2.3 Uzawa Iteration

Uzawa algorithm was originally introduced by K.J.Arrow et al. (1958), which gained popularity in computational fluid dynamics. It has later been applied to the case of discretizing Stokes problem with Mixed Finite Element. Some inexact inner solver to accelerate uzawa iteration was discussed by Elman and Golub (1994) and Bramble et al. (1997).

We start by stating an abstract inexact uzawa iteration algorithm in Algorithm 1. Some choose diagonal matrix $\alpha\mathbf{I}$ for preconditioner $\mathbf{Q}_A$. However, such

Algorithm 1 Inexact Uzawa Iteration

- 1: Initialize $\mathbf{x}_0 = \mathbf{0}$, $\mathbf{y}_0 = \mathbf{0}$, tolerance $\text{tol} = 1$ and residual $\text{res} = 0$.
 - 2: **while** $\text{res} > \text{tol}$ **do**
 - 3: Obtain $\tilde{\mathbf{x}} = \mathbf{Q}_A^{-1}(\mathbf{F} - (\mathbf{A}\mathbf{x}_i + \mathbf{B}\mathbf{y}_i))$
 - 4: Update $\mathbf{x}_{i+1} = \mathbf{x}_i + \tilde{\mathbf{x}}$
 - 5: Obtain $\tilde{\mathbf{y}} = \mathbf{Q}_B^{-1}(\mathbf{B}^T\mathbf{x}_{i+1} + \mathbf{C}\mathbf{y}_i - \mathbf{G})$
 - 6: Update $\mathbf{y}_{i+1} = \mathbf{y}_i + \tilde{\mathbf{y}}$
 - 7: Update $\text{res} = \|\tilde{\mathbf{x}}\|_2 + \|\tilde{\mathbf{y}}\|_2$
 - 8: **end while**
-

simple matrix wouldn't generate a convergence result when applied to our coupled problem. In the next section, we introduce a modified algorithm that would solve our system.

1.2.4 Modified Uzawa Iteration

The linear system formed from the equations (1.27), (1.28), (1.29) and (1.30) is

$$\begin{bmatrix} \mathbf{A}_s & -\mathbf{B}_s & \mathbf{0} & \mathbf{0} \\ \mathbf{B}_s^T & \mathbf{C}_s & \mathbf{0} & \mathbf{K} \\ \mathbf{0} & \mathbf{0} & \mathbf{A}_d & -\mathbf{B}_d \\ \mathbf{0} & \mathbf{K} & \mathbf{B}_d^T & \mathbf{C}_d \end{bmatrix} \begin{bmatrix} \mathbf{x}_s \\ \mathbf{y}_s \\ \mathbf{x}_d \\ \mathbf{y}_d \end{bmatrix} = \begin{bmatrix} \mathbf{f}_s \\ \mathbf{g}_s \\ \mathbf{f}_d \\ \mathbf{g}_d \end{bmatrix}, \quad (1.41)$$

wherein the solution represents the degrees of freedom of primary variables with respect to the bases of the finite element spaces. (Insert details of calculation of each blocked matrix). We form a double saddle point system by symmetrically permutate original linear system,

$$\begin{bmatrix} \mathbf{A}_s & \mathbf{0} & -\mathbf{B}_s & \mathbf{0} \\ \mathbf{0} & \mathbf{A}_d & \mathbf{0} & -\mathbf{B}_d \\ \mathbf{B}_s^T & \mathbf{0} & \mathbf{C}_s & \mathbf{K} \\ \mathbf{0} & \mathbf{B}_d^T & \mathbf{K} & \mathbf{C}_d \end{bmatrix} \begin{bmatrix} \mathbf{x}_s \\ \mathbf{x}_d \\ \mathbf{y}_s \\ \mathbf{y}_d \end{bmatrix} = \begin{bmatrix} \mathbf{f}_s \\ \mathbf{f}_d \\ \mathbf{g}_s \\ \mathbf{g}_d \end{bmatrix}. \quad (1.42)$$

We group these block matrix to form a concise version,

$$\mathbf{A} = \begin{bmatrix} \mathbf{A}_s & \mathbf{0} \\ \mathbf{0} & \mathbf{A}_d \end{bmatrix}, \quad \mathbf{B} = \begin{bmatrix} -\mathbf{B}_s & \mathbf{0} \\ \mathbf{0} & -\mathbf{B}_d \end{bmatrix}, \quad \mathbf{C} = \begin{bmatrix} -\mathbf{C}_s & -\mathbf{K} \\ -\mathbf{K} & -\mathbf{C}_d \end{bmatrix}, \quad \mathbf{F} = \begin{bmatrix} \mathbf{f}_s \\ \mathbf{f}_d \end{bmatrix}, \quad \mathbf{G} = \begin{bmatrix} -\mathbf{g}_s \\ -\mathbf{g}_d \end{bmatrix}, \quad (1.43)$$

$$\begin{bmatrix} \mathbf{A} & \mathbf{B} \\ \mathbf{B}^T & \mathbf{C} \end{bmatrix} \begin{bmatrix} \mathbf{x} \\ \mathbf{y} \end{bmatrix} = \begin{bmatrix} \mathbf{F} \\ \mathbf{G} \end{bmatrix}, \quad (1.44)$$

where $\mathbf{A}$ is a positive definite matrix. However, $\mathbf{B}$ is usually a singular matrix when no melting region presents. We will present a modified Uzawa iteration algorithm to deal with this coupled degenerate singular system.

1.2.5 Numerical Test

We test our MFEM setup with three sets of problems. First, we test with a manufactured solution all prescribed with essential boundary condition, but the right hand side was modified. Second, we test a pseudo 1D problem with 2D elements with three different porosity scenarios. Third, we test a more complex yet a more realistic problem representing Mid Ocean Ridge.

Problem Setup 1: Manufactured Solution.

Algorithm 2 Modified Uzawa Iteration

- 1: Initialize $\mathbf{x}_0 = \mathbf{0}$, $\mathbf{y}_0 = \mathbf{0}$, tolence $\text{tol} = 1$ and residual $\text{res} = 0$.
 - 2: **while** $\text{res} > \text{tol}$ **do**
 - 3: Obtain $\tilde{\mathbf{x}} = \mathbf{A}^{-1}(\mathbf{F} - (\mathbf{A}\mathbf{x}_i + \mathbf{B}\mathbf{y}_i))$
 - 4: Update $\mathbf{x}_{i+1} = \mathbf{x}_i + \tilde{\mathbf{x}}$
 - 5: Obtain $\mathbf{r} = \mathbf{B}^T \mathbf{x}_{i+1} + \mathbf{C}\mathbf{y}_i - \mathbf{G}$
 - 6: Obtain $\tilde{\mathbf{y}} = \text{argmin}_{\mathbf{y} \in V} \|(\mathbf{B}^T \mathbf{A}^{-1} \mathbf{B} - \mathbf{C})^{-1} \tilde{\mathbf{y}} - \mathbf{r}\|$
 - 7: Update $\mathbf{y}_{i+1} = \mathbf{y}_i + \tilde{\mathbf{y}}$
 - 8: Update $\text{res} = \|\tilde{\mathbf{x}}\|_2 + \|\tilde{\mathbf{y}}\|_2$
 - 9: **end while**
-

We solve a manufactured system of equations on the rectangular domain $(x, y) \in [-1, 1]^2$. We assume a constant porosity across the domain as ϕ . We compute the right hand side with prescribed functions as

$$\check{q} = 0 \quad \check{q}_f = 2(x + y) \quad \check{\mathbf{v}}_r = -\frac{\phi_f^{-1/2}}{1 - \phi_f} \begin{pmatrix} x^2 \\ y^2 \end{pmatrix} \quad \check{\mathbf{v}}_s = \frac{\phi_f^{1/2}}{1 - \phi_f} \begin{pmatrix} x^2 \\ y^2 \end{pmatrix} \quad (1.45)$$

$$\nabla \cdot \check{\mathbf{v}}_r = \frac{-2\phi_f^{-1/2}}{1 - \phi_f} (x + y) \quad (1.46)$$

$$\mathcal{D}\check{\mathbf{v}}_s = \frac{2\phi_f^{1/2}}{1 - \phi_f} \begin{bmatrix} x & 0 \\ 0 & y \end{bmatrix} \quad (\nabla \cdot \check{\mathbf{v}}_s)\mathbf{I} = \frac{2\phi_f^{1/2}}{1 - \phi_f} \begin{bmatrix} x + y & 0 \\ 0 & x + y \end{bmatrix} \quad (1.47)$$

Substitute the computed results into PDE

$$\begin{aligned} \check{\mathbf{v}}_r + \phi_f^{1/2} \nabla \check{q}_f &= -\frac{\phi_f^{-1/2}}{1 - \phi_f} \begin{pmatrix} x^2 \\ y^2 \end{pmatrix} + \phi_f^{1/2} \begin{pmatrix} 2 \\ 2 \end{pmatrix} \\ \phi_f^{1/2} \nabla \cdot (\check{\mathbf{v}}_r) + \frac{1}{1 - \phi_f} \check{q}_f &= \frac{-2}{1 - \phi_f} (x + y) + \frac{1}{1 - \phi_f} 2(x + y) = 0 \\ \nabla \cdot \check{\mathbf{v}}_s - \frac{\phi_f^{1/2}}{1 - \phi_f} \check{q}_f &= \frac{2\phi_f^{1/2}}{1 - \phi_f} (x + y) - \frac{2\phi_f^{1/2}}{1 - \phi_f} (x + y) = 0 \\ -2(1 - \phi_f) \nabla \cdot \sigma(\check{\mathbf{v}}_s) &= -2(1 - \phi_f) \nabla \cdot (\mathcal{D}\check{\mathbf{v}}_s - \frac{1}{3}(\nabla \cdot \check{\mathbf{v}}_s)\mathbf{I}) = -\frac{8\phi_f^{1/2}}{3} \begin{pmatrix} 1 \\ 1 \end{pmatrix} \end{aligned} \quad (1.48)$$

Problem Setup 2: Column Compaction.

In this problemsetup, we perform convergence test on a 2D grid with a 1D problem. We study a compacting column in one direction. The column extends over $y \in [-L, L]$ and has no flow through top and bottom boundaries. We prescribe the following boundary conditions

- Bottom Edge;
 - Stokes velocity $\check{\mathbf{v}}_s = \mathbf{0}$;
 - Darcy velocity $\check{\mathbf{v}}_l = \mathbf{0}$;
 - Normal flux is also determined to be zero.
- Left and Right side Edges;
 - y component of Stokes velocity is free, x component is kept as zero;
 - Darcy velocity, which is understood as flux is also kept zero;
 - normal flux dof fixed with a zero flux.
- Top Edge;
 - Stokes velocity $\check{\mathbf{v}}_s = \mathbf{0}$;
 - Darcy velocity $\check{\mathbf{v}}_l = \mathbf{0}$;
 - Normal flux is also determined to be zero.

We assume no velocity in x direction, $\check{\mathbf{v}}_s \cdot \mathbf{i} = 0$, and $\check{\mathbf{v}}_r \cdot \mathbf{i} = 0$, where $\mathbf{i}$ is the unit vector in x direction pointing from left to right. Let $u = \phi \check{\mathbf{v}}_r \cdot \mathbf{j}$ and $v = \check{\mathbf{v}}_s \cdot \mathbf{j}$, where $\mathbf{j}$ is the unit vector in y direction pointing upwards.

$$\begin{aligned}
 u + \phi^2 q'_l &= 0, \\
 u' + \phi(q_l - q_s) &= 0, \\
 [q_s - \frac{1}{3}(1 - 4\phi)v']' &= 0, \\
 v' - \phi(q_f - q_s) &= 0,
 \end{aligned} \tag{1.49}$$

When no melting presents $\phi = 0$, the equations reduce to

$$u = -v = 0, \quad \text{and} \quad q'_s = 1, \quad \text{and} \quad q_l = 0. \quad (1.50)$$

When melting presents $\phi > 0$, the equations can be reduced to

$$\phi^{2+2\Theta} \left(\frac{3 + \phi - 4\phi^2}{3\phi} u' \right)' - u = \phi^{2+2\Theta} (1 - \phi), \quad (1.51)$$

where all other quantities can be determined according to u as

$$v = -u, \quad \text{and} \quad q'_l = -\phi^{-2-2\Theta} u, \quad \text{and} \quad q_s = u'/\phi + q_l. \quad (1.52)$$

When ϕ is constant, we define an auxiliary function R as

$$R = \left(\phi^{2+2\Theta} \frac{3 + \phi - 4\phi^2}{3\phi} \right)^{-1/2}. \quad (1.53)$$

We test our MFEM code on three porosity settings, and use the closed form solutions derived in Arbogast et al. (2017).

- Constant porosity;

$$\phi_0(z) = \phi_0; \quad (1.54)$$

Closed form solution:

$$\begin{aligned} u &= -\phi_0^2(1 - \phi_0) \left[1 - \frac{\cosh(Rz)}{\cosh(RL)} \right], \\ v &= -u, \\ q_l &= (1 - \phi_0) \left[z - \frac{1}{R} \frac{\sinh(Rz)}{\cosh(RL)} \right] + c, \\ q_s &= (1 - \phi_0) \left[z - \frac{1 - 4\phi_0}{3 + \phi_0 - 4\phi_0^2} \frac{\phi_0}{R} \frac{\sinh(Rz)}{\cosh(RL)} \right] + c, \end{aligned} \quad (1.55)$$

where c is a constant kernel.

- Piece wise constant porosity;

$$\phi_J(z) = \begin{cases} 0 & \text{if } z > 0, \\ \phi_0 & \text{if } z \leq 0, \end{cases} \quad (1.56)$$

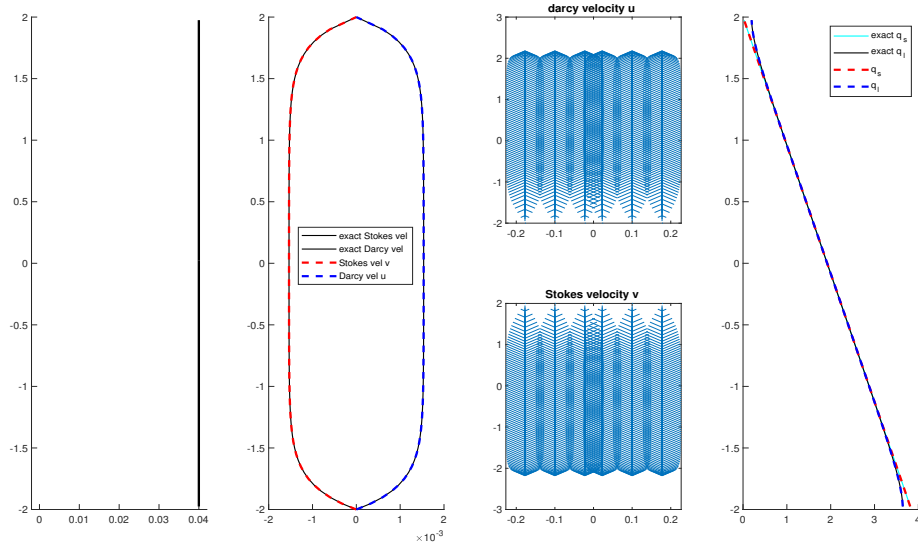


Figure 1.1: Constant porosity compaction column test.

$m \times n$	u		v		q_l		q_s	
	L^2 error	rate	L^2 error	rate	L^2 error	rate	L^2 error	rate
2×20	3.100e-05	-	3.100e-05	-	fill	-	fill	-
2×40	8.047e-06	1.95	8.047e-06	1.95	fill	-	fill	-
2×80	2.031e-06	1.99	2.031e-06	1.99	fill	-	fill	-
2×160	5.091e-07	2.00	5.091e-07	2.00	fill	-	fill	-

Table 1.1: Constant porosity compaction column test.

Closed form solution:

We conclude that $u = -v = 0$ when $z > 0$.

$$\begin{aligned}
 u &= \phi_0^2(1 - \phi_0) \left[1 - \cosh(Rz) + \frac{1 - \cosh(RL)}{\sinh(RL)} \sinh(Rz) \right] \\
 v &= -u \\
 q_s &= z - \frac{1 - \cosh(RL)}{\sinh(R)}
 \end{aligned} \tag{1.57}$$

- Quadratic porosity.

$$\phi_2(z) = \begin{cases} 0 & \text{if } z > 0, \\ \phi_0 z^2 & \text{if } z \leq 0, \end{cases} \tag{1.58}$$

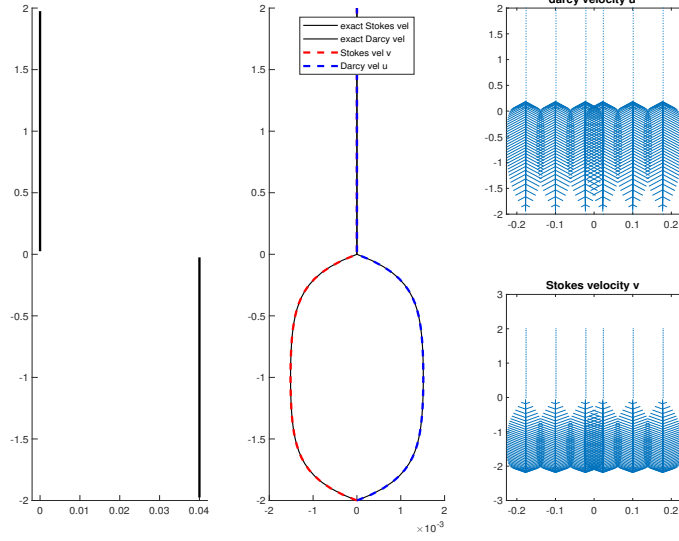


Figure 1.2: Piecewise constant porosity compaction column test.

$m \times n$	u		v		q_l		q_s	
	L^2 error	rate	L^2 error	rate	L^2 error	rate	L^2 error	rate
2×20	2.980e-05	-	2.980e-05	-	fill	-	fill	-
2×40	7.681e-06	1.96	7.681e-06	1.96	fill	-	fill	-
2×80	1.958e-06	1.97	1.958e-06	1.97	fill	-	fill	-
2×160	4.974e-07	1.98	4.974e-07	1.98	fill	-	fill	-

Table 1.2: Constant porosity compaction column test.

Closed form solution:

We conclude that $u = -v = 0$ when $z > 0$.

$$\begin{aligned}
 u &= \frac{\phi_0^2}{1 - 4\phi_0} \left(L^{4-r_1} z^{r_1} - z^4 \right), \\
 v &= -v \\
 q_l &= \frac{1}{1 - 4\phi_0} \left(z + \frac{L^{4-r_1} (-z)^{r_1-3}}{r_1 - 3} \right) + c, \\
 q_s &= z + c,
 \end{aligned} \tag{1.59}$$

where

$$r_1 = \frac{3 + \sqrt{9 + 4/\phi_0}}{2}. \tag{1.60}$$

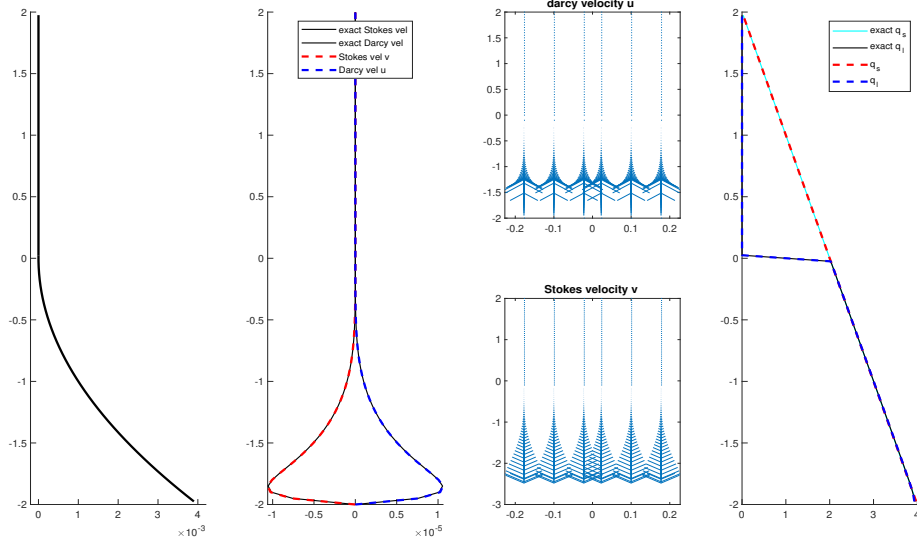


Figure 1.3: Quadratic porosity compaction column test.

$m \times n$	u		v		q_l		q_s	
	L^2 error	rate	L^2 error	rate	L^2 error	rate	L^2 error	rate
2×20	9.616e-07	-	9.616e-07	-	fill	-	fill	-
2×40	3.212e-07	1.58	3.212e-07	1.58	fill	-	fill	-
2×80	9.028e-08	1.83	9.028e-08	1.83	fill	-	fill	-
2×160	2.746e-08	1.72	2.746e-08	1.72	fill	-	fill	-

Table 1.3: Constant porosity compaction column test.

Problem Setup 3: Mid-Ocean Ridge.

We now redo the Mid-Ocean ridge test case in Arbogast et al. (2017). We solve the full system of equations on the rectangular domain $-160\text{km} < x < 160\text{km}$, $0, x, 160\text{km}$. The boundary conditions are imposed by the constant porosity corner flow solution of Stokes velocity as

$$\mathbf{v}_s = \frac{2U_0}{\pi(x^2 + z^2)} \begin{pmatrix} \tan^{-1}(x/z)(x^2 + z^2) - xz \\ -z^2 \end{pmatrix}, \quad (1.61)$$

where $U_0 = 10^{-9}\text{m/s} = 3.2\text{cm/yr}$ is the constant upwelling velocity of mantle. According to mass conservation condition, we set no Darcy flux across the boundary.

We then set a no identically vanishing porosity by the formula

$$\phi(x, z) = \begin{cases} 0.05(\frac{120\text{km} - z}{120\text{km}})^2(1 - \frac{|x|}{z + l}), & \text{if } x \leq 120\text{km} \text{ and } |x| \leq z + l, \\ 0, & \text{otherwise,} \end{cases} \quad (1.62)$$

where $l = 20\text{m}$ is the offset set to avoid singularity computation. at the center $x = 0$ we translate the coordinates x to $x - l$ if $x < 0$, and $x + l$ when $x > 0$.

Works Cited

- T. Arbogast, M. A. Hesse, and A. L. Taicher. Mixed methods for two-phase Darcy-Stokes mixtures of partially melted materials with regions of zero porosity. *SIAM J. Sci. Comput.*, 39(2):B375–B402, 2017. DOI 10.1137/16M1091095.
- Michele Benzi, Gene H. Golub, and Jörg Liesen. Numerical solution of saddle point problems. *Acta Numerica*, 14:1–137, 2005. doi: 10.1017/S0962492904000212.
- James H. Bramble, Joseph E. Pasciak, Apostol T, and Vassilev. Analysis of the inexact uzawa algorithm for saddle point problems. *SIAM. J. Numer. Anal.*, 34: 1072–1092, 1997.
- Howard C. Elman and Gene H. Golub. Inexact and preconditioned uzawa algorithms for saddle point problems. *SIAM. J. Numer. Anal.*, 31:1645–1661, 1994.
- K.J.Arrow, L. Hurwicz, and H. Uzawa. *Studies in Linear and Nonlinear Programming*. Stanford University Press, 1958.
- C. C. Paige and M. A. Saunders. Solution of sparse indefinite systems of linear equations. *SIAM Journal on Numerical Analysis*, 12(4):617–629, 1975. doi: 10.1137/0712047. URL <https://doi.org/10.1137/0712047>.