

- 1. Outline.
 - I Introduction and Background
 - II Governing equations for partial melting problem
 - i Flow
 - ii Transport
 - iii Phase
 - III Numerics
 - i Flow (BR and Uzawa solver)
 - ii Transport (MLWENO)
 - iii Eutectic phase package
 - iv Coupled computation
 - IV Computer implementation details
 - i PETSc
 - ii Test problems
 - iii parallelization
 - V Application to real problems
 - i Mid-ocean ridge problem
 - VI Summary, conclusion and future work

2. Magma migration. For our very first simulation, we would like to simulate the production of magma in a simplified controlled scenerio. I was inspired by the setup described previously in[?]. The simulation will be setup in a chunk of rock ascending with constant upwelling velocity. A linear adiabatic temperature profile is applied here. A linear intial rock composition is also applied here.

2.1. Mathematical model. We are going to show our coupled darcy-stokes semi-degenerate model can solve this problem well. In[?], matrix creeping (Stokes equation) did not directly involved in the simulation due to the fact that boundary condition restricts a constant background upwelling ascending velocity. The solid matrix pressure is therefore strictly lithostatic pressure relating only to depth. In[?], only energy transports while concentration does not participate in transport phenomenon.

$$\begin{aligned}
 \check{\mathbf{v}}_r + \phi_f^{1+\Theta} \nabla (\phi_f^{-1/2} \check{q}_f) &= 0 \\
 \phi_f^{-1/2} \nabla \cdot (\phi_f^{1+\Theta} \check{\mathbf{v}}_r) + \frac{1}{1-\phi_f} (\check{q}_f - \phi_f^{1/2} \check{q}) &= 0 \\
 \nabla \check{q} - \nabla \cdot \hat{\sigma}(\check{\mathbf{v}}_s) &= -(1-\phi_f) \hat{\mathbf{g}} \\
 \nabla \cdot \check{\mathbf{v}}_s - \frac{\phi_f^{1/2}}{1-\phi_f} (\check{q}_f - \phi_f^{1/2} \check{q}) &= 0
 \end{aligned}
 \tag{2.1}$$

For simplification, we won't include diffusion into our transport model. We drop the diffusion term here for the fact that diffusion coefficient is relatively small compared to convective phenomenon. On the other hand, eutectic melting has a constant concentration such that gradient of concentration is of zero value. Hence the transport of component 2 (opx) can be expressed in terms of mixture theory as:

$$\begin{aligned}
 \bar{C}_t + \nabla \cdot (\bar{C} \mathbf{v}) &= 0 \\
 \bar{C}_t + \nabla \cdot (\mathbf{v}_e^* \bar{C}) &= 0
 \end{aligned}
 \tag{2.2}$$

where $\mathbf{v}_e^*$ denotes effective veclocity $\mathbf{v}_e^* = \kappa \mathbf{v}_f + (1-\kappa) \mathbf{v}_s$ and $\kappa = \frac{\phi_f C_f}{\bar{C}}$ where C_f and $\bar{C}$ using values from previous time step. Enthalpy is transported in a similar manner.

$$\bar{\mathcal{H}}_t + \nabla \cdot (\bar{\mathcal{H}} \mathbf{v} - \bar{K} \nabla T) = 0
 \tag{2.3}$$

2.1.1. Boundary conditions. In order to solve the proposed darcy-stokes coupled equation, we need appropriate boundary conditions defined around the computational domain. A detailed description is presented as following:


- Prescribe essential boundary condition of constant upwelling ascending velocity all around the computational domain. $\mathbf{v}_s = \mathbf{W}$ at no melting region.
- Prescribe natural boundary conditon at the place where melting happens.
- Prescribe essential (dirichlet) boundary condition of zero normal velocity on bottom, left and right sides.
- Prescribe natural boundary condition on top. A free outlet

2.1.2. Initial conditions. At the same time, we need an initial conditions for our transport equations. In[?], temperature and composition are distributed linearly along against the depth. Unlike [?], we implement eutectic melting model into our simulation. In our situation, temperature and total composition won't be deterministic. Here I make some modification on the setup. Initially, the entire domain was burried under the partial melting region, where



temperature was under the sub-solidus region. Melting starts when the entire chunk ascending adiabatically. As pressure continuously lowering, the eutectic point is lowering at the same time. Hence, melting flux supplies from top.

In eutectic melting situation, we cannot impose simple linear temperature directly due to the existence of the eutectic point. Therefore, an appropriate initial condition should be assigned with careful selection.



Linear Enthalpy distribution (Near constant).




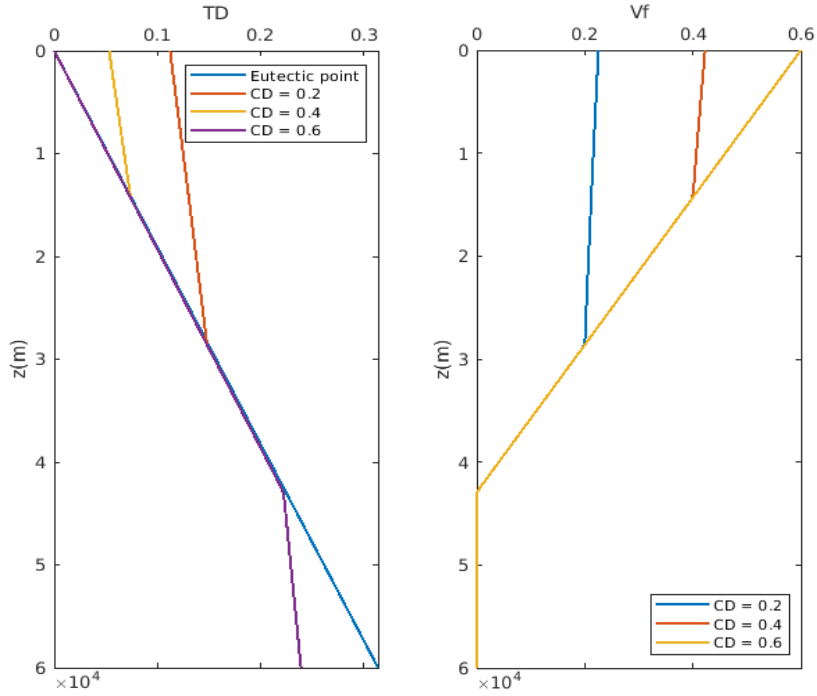





Using enthalpy and composition distribution calculated above, we can generate corresponding initial velocity distribution:

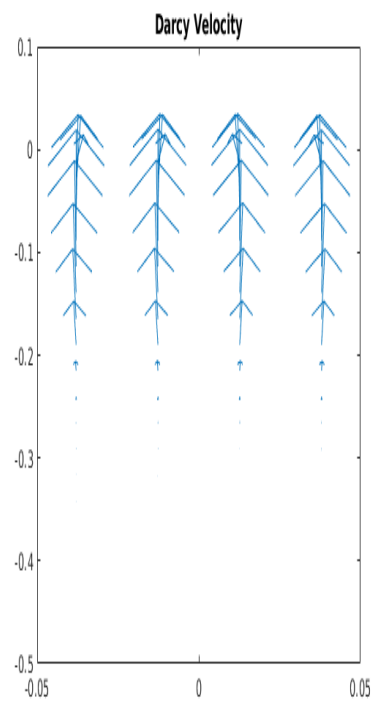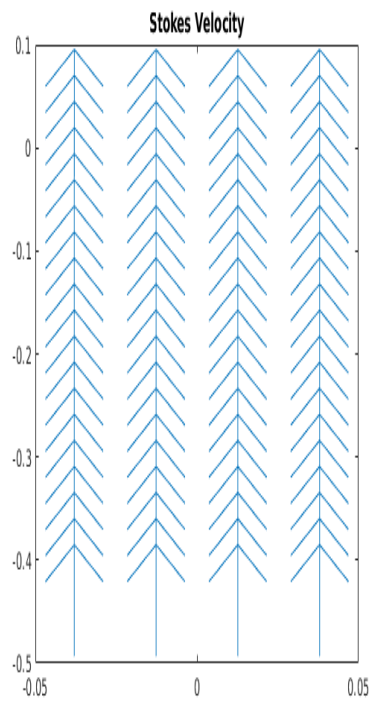

!!!Corrected version

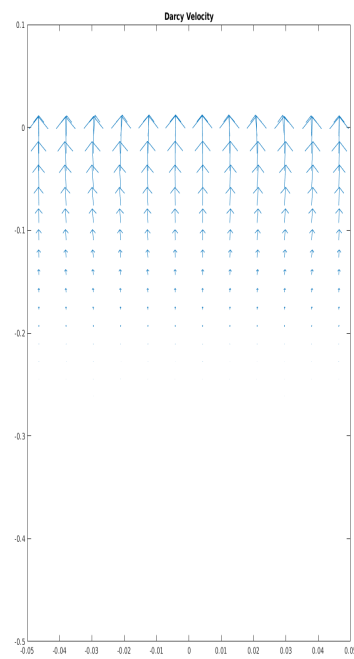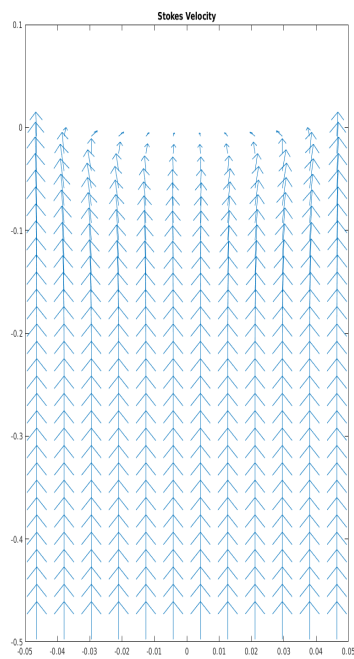

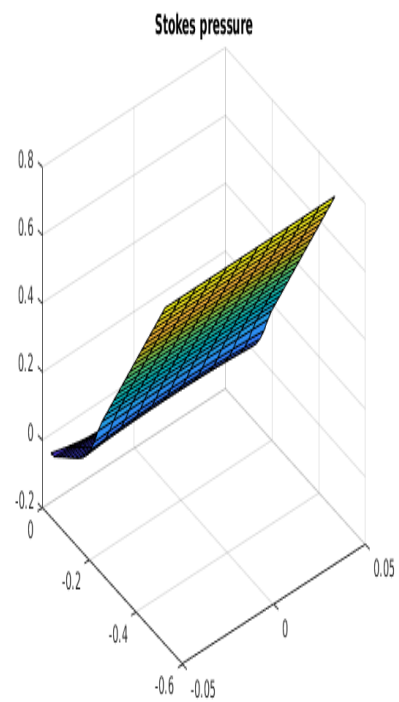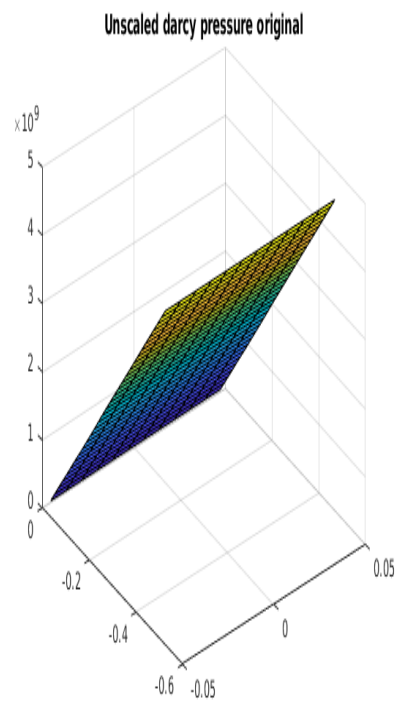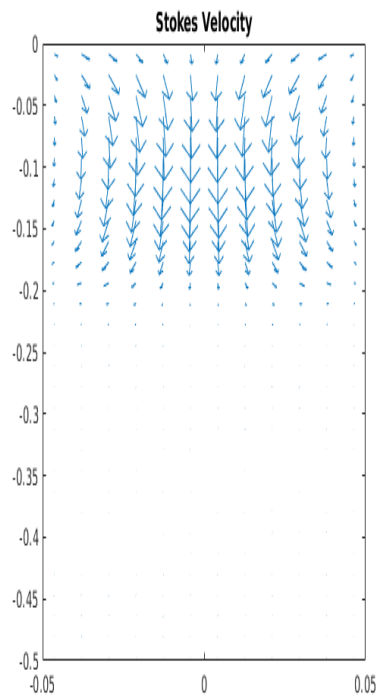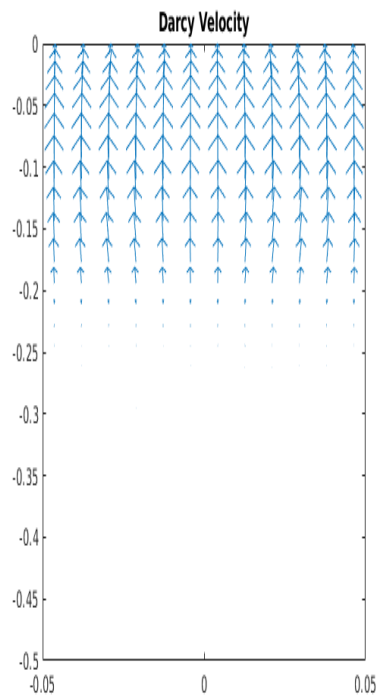

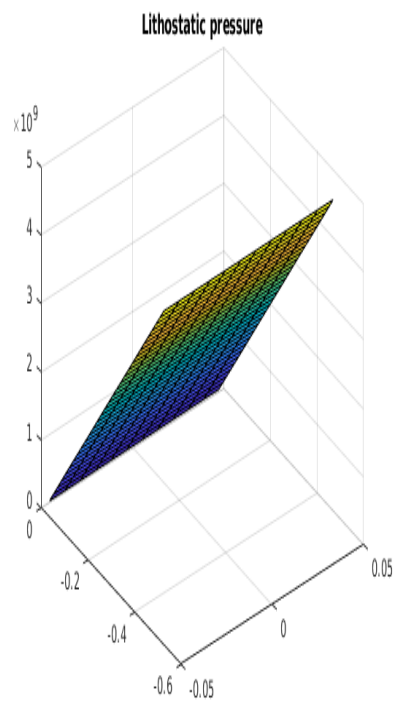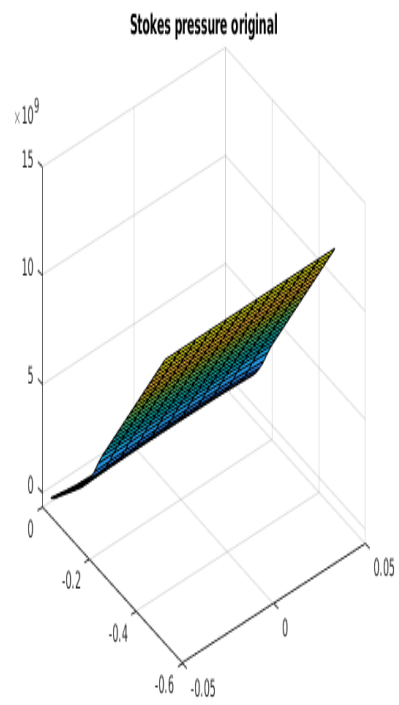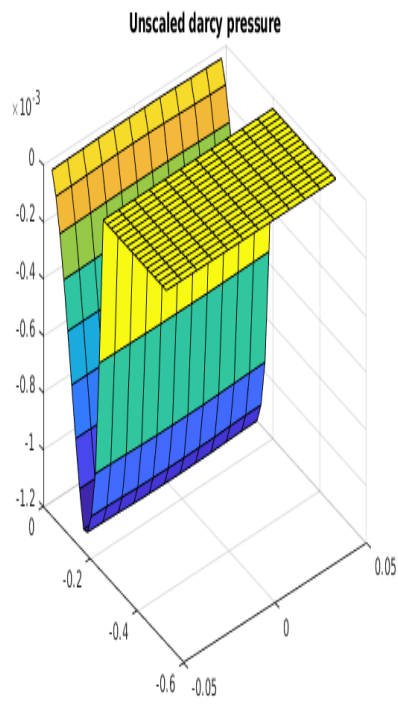

2.1.3. Melting depth. As the magma chunk ascending adiabatically, we can define a depth z_m where melting starts. From the plots above, we can conclude that in our model

- Change of dimensionless composition can only affect the separation of eutection and super-eutection region.
- Change of dimensionless composition will not affect where magma leave eutection melting region.

A fixed melting depth can therefore be calculated despite dimensionless composition distribution. The melting happens when current temperature reaches the eutectic melting temperature. In the situation of linear dimensionless enthalpy distribution $f(HD) = HD_0 + \eta z$. Assuming lithostatic pressure distribution, the eutectic point at given depth z is: $\mathcal{T}_e = 0 + \gamma^* \rho_s g z$. The melting depth is therefore calculated as: $z = \frac{HD_0}{\rho_s g - \eta}$. In this case, the smaller initial dimensionless enthalpy HD_0 the shorter melting depth.

2.2. Interpolation of stokes pressure. We are using piece-wise constant L2 approximation space for stokes and darcy pressure. In order to evaluate point-wise pressure. We are going to present an interpolation using generated piece-wise constant pressure.

2.3. Approximation of physical values on the cell edges. In the process of simulation, plenty of physical values are defined on the gauss points of cell edges. Take κ for example, where $\kappa = \frac{\phi_f c_f}{\bar{c}}$, two phase parameters ϕ_f and c_f are computed with phase package using reconstructed values on both side of the cell edges. The value of $\bar{c}$ are directly obtained by WENO reconstruction. Therefore, two different values κ_{In} and κ_{Out} will be obtained during this computation process, which will be used in the calculation of the numerical flux.