

Copyright
by
Chenyu Tian
2025

The Dissertation Committee for Chenyu Tian
certifies that this is the approved version of the following dissertation:

Simulation of partial melting material

Committee:

Todd Arbogast, Supervisor

Marc Hesse, Co-supervisor

Omar Ghattas

Patric Heimbach

Thorsten Becker

Simulation of partial melting material

by
Chenyu Tian

Dissertation

Presented to the Faculty of the Graduate School of
The University of Texas at Austin
in Partial Fulfillment
of the Requirements
for the Degree of

Doctor of Philosophy

The University of Texas at Austin
August 2025

Dedication

To all future Longhorn graduate students.

Epigraph

What starts here changes the world.

—University of Texas at Austin

Acknowledgments

Thanks to the previous authors of this template, and to the Graduate School for providing it.

Preface

Readers, this document represents a great deal of time and effort. Enjoy.
Cheers, Chenyu Tian.

Abstract

Simulation of partial melting material

Chenyu Tian, PhD
The University of Texas at Austin, 2025

SUPERVISORS: Todd Arbogast, Marc Hesse

Table of Contents

List of Tables	12
List of Figures	13
Chapter 1: Governing Equations	15
1.1 Mechanics in Mantle Dynamics	15
1.1.1 Phase Fraction	15
1.1.2 Conservation Laws	16
1.1.3 Darcy's Law	17
1.1.4 Compaction	18
1.1.5 Full Static System	19
1.1.6 Scaled Formulation	19
1.2 Transport of Chemical Species and Energy	20
1.2.1 Transport of Chemical Species	21
1.2.2 Effective Velocity	22
1.2.3 Transport of Energy	23
1.2.4 Temperature Formulation	24
1.3 Eutectic Phase Behavior	26
1.3.1 Clausius-Clapeyron Relation	27
1.3.2 Some Assumptions	28
1.3.3 Phase Diagram	29
1.3.4 Phase Split Calculation	30
1.4 Nondimensionalization	33
Chapter 2: Numerical Methods	36
2.1 Quadrilateral Mesh	36
2.2 Mathematical Preliminaries	38
2.3 Direct Serendipity Space	41
2.3.1 Second-order Space $\mathcal{DS}_2$	42
2.3.2 First-order Space $\mathcal{DS}_1$	45
2.3.3 An Interpolation Operator	46
2.4 Mixed Finite Elements	48
2.4.1 A Darcy Model Problem	48
2.4.2 A Reduced $H(\text{div})$ Conforming Space $\mathbb{V}_1^0$	49
2.4.3 Stability and Approximation Properties for $\mathbb{V}_1^0$	52

2.4.4	A Stokes Model Problem	53
2.4.5	Modified Bernardi-Raugel Element	54
2.4.6	Stability and Approximation Properties for $\mathbb{V}_1^{\text{BR}} \times \mathbb{W}_0$	56
2.4.7	Numerical Test	60
2.5	Coupled Degenerate Darcy-Stokes System	62
2.5.1	The Weak Formulation	64
2.5.2	A Scaled Mixed Finite Element Method	65
2.5.3	Local Mass Conservation	67
2.6	Saddle Point System	69
2.6.1	Reduced System	69
2.6.2	Linear System for Coupled Darcy-Stokes Equations	70
2.6.3	Uzawa Iteration	72
2.7	Convergence Test	75
2.7.1	1D Simplification	75
2.7.2	2D Boundary Conditions	76
2.7.3	Column Compaction with Constant Porosity	78
2.7.4	Column Compaction with Discontinuous Porosity	79
2.7.5	Column Compaction With Quadratic Porosity.	80
2.8	Simulation of a Simple Mid-Ocean Ridge Model	84
2.9	Finite Volume Method	88
2.10	ML-WENO	89
2.10.1	Stencil Polynomials	89
2.10.2	Stencil Polynomial Smoothness Indicators	91
2.10.3	Two Alternative Smoothness Indicators	93
2.10.4	ML-WENO Weighting	93
2.10.5	The ML-WENO Reconstruction Error	94
2.10.6	Time stepping	98
2.11	Handling Boundary Conditions	99
2.11.1	Example on additional stencils reinforced at the boundary . . .	101
2.11.2	Stabilization of a inflow boundary	103
2.12	Numerical Test	104

Chapter 3: Code Implementation	106
3.1 Geometry	106
3.1.1 General Unstructured Mesh	107
3.2 Logically Rectangular Mesh	108
3.2.1 Reshape of N -dimensional Data	109
3.2.2 Local Vertex Representation	110
3.2.3 Local to Global Index Convention	111
3.3 Dofs and MFEM assembly	111
3.3.1 MFEM Indexing Example	112
Works Cited	115

List of Tables

1.1	Parameters Table	35
2.1	Rectangular Grids. L^2 -error in the residual of the solution u (res_u), the pressure p (res_p), and the of derivatives of the solution Du (res_{du}). . .	62
2.2	Distorted Grids. L^2 -error in the residual of the solution u (res_u), the pressure p (res_p), and the of derivatives of the solution Du (res_{du}). . .	62
2.3	Constant porosity (2.156), with $\phi_0 = 0.04$. L^2 norm of errors and convergence rates for the scalar velocities u and v , the solid and the liquid pressure potentials q_s and q_l	78
2.4	Discontinuous porosity (2.158), with $\phi_0 = 0.04$. L^2 norm of errors and convergence rates for the scalar velocities u and v , the solid and the liquid pressure potentials q_s and q_l	80
2.5	Quadratic porosity (2.159) with $\phi_0 = 0.001$. L^2 norm of errors and convergence rates for the scalar velocities u and v , the solid and the liquid pressure potentials q_s and q_l	84
2.6	Quadratic porosity (2.159) with $\phi_0 = 0.01$. L^2 norm of errors and convergence rates for the scalar velocities u and v , the solid and the liquid pressure potentials q_s and q_l	85
3.1	ID array	114

List of Figures

1.1	Phases and species in an representative volume element (RVE).	21
1.2	Eutectic phase diagram of a Olivine-Orthopyroxene system.	27
1.3	Phase diagram when the composition of opx is smaller than the eutectic composition. Region V does not appear.	29
1.4	Enthalpy-Composition diagram	31
2.1	An exhibition of a reference square element, a local reference element, and a general non-degenerate quadrilateral element.	38
2.2	An exhibition of a full logically rectangular quasi-uniform quadrilateral mesh $\mathcal{T}_h$	39
2.3	Rational function R_0	43
2.4	Edge nodal basis function $\varphi_{e,0}^{(2)}$ in $\mathcal{DS}_2$	44
2.5	Vertex nodal basis function $\varphi_{v,0}^2$ in $\mathcal{DS}_2$	44
2.6	Supplemental rational function R in $\mathcal{DS}_1$	45
2.7	Vertex nodal basis function in $\mathcal{DS}_1$	46
2.8	“Linear” shape function φ_l	51
2.9	“Constant” shape function φ_c	52
2.10	Numerical results on rectangular and quadrilateral mesh.	61
2.11	Constant porosity (2.156) with $\phi_0 = 0.04$. Shown are the porosity ϕ , scalar velocities u and v along with closed form solution, velocity vectors $\check{\mathbf{v}}_s$ and $\phi\check{\mathbf{v}}_r$ reconstructed on the edge quadrature points, q_l and q_s together.	79
2.12	Discontinuous porosity (2.158) with $\phi_0 = 0.04$. Shown are the porosity ϕ , scalar velocities u and v along with closed form solution, velocity vectors $\check{\mathbf{v}}_s$ and $\phi\check{\mathbf{v}}_r$ reconstructed on the edge quadrature points, q_l and q_s together.	81
2.13	Quadratic porosity (2.159) with $\phi_0 = 0.001$. Shown are the porosity ϕ , scalar velocities u and v along with closed form solution, velocity vectors $\check{\mathbf{v}}_s$ and $\phi\check{\mathbf{v}}_r$ reconstructed on the edge quadrature points, q_l and q_s together.	84
2.14	Quadratic porosity (2.159) with $\phi_0 = 0.01$. Shown are the porosity ϕ , scalar velocities u and v along with closed form solution, velocity vectors $\check{\mathbf{v}}_s$ and $\phi\check{\mathbf{v}}_r$ reconstructed on the edge quadrature points, q_l and q_s together.	85
2.15	Porosity distribution.	86
2.16	Liquid pressure potential and velocity.	87

2.17	Solid pressure potential and velocity.	87
2.18	An example of a (3,2,1) multi-level stencils combination on a logically rectangular quadrilateral mesh.	94
2.19	An illustration of a (3,2,1) multi-level stencils combination on a logically rectangular quadrilateral mesh with two shock present.	96
2.20	An example of a standard (5,3) stencils combination on a logically rectangular quadrilateral mesh.	102
2.21	An illustration of different cells using one fifth-order stencil to avoid accuracy degeneracy.	102
2.22	The reconstructed solution on the 20×20 randomly distorted logically rectangular mesh.	103
2.23	Effective polynomial degree with and without some additional fifth-order stencils added near the top right boundary.	103
2.24	A test case demonstrating inflow stabilization using a constant stencil at the inflow boundary on a 80×80 rectangular domain.	104
2.25	The reconstructed solution on the 180×60 rectangular mesh at times 1.0 and 2.0. (The rarefaction and shock meet at time 2.0.)	105
3.1	An illustration of the half-edge data structure for a quadrilateral. . .	108
3.2	An exhibition of velocity dofs associated with a modified Bernardi-Raugel element.	112
3.3	An exhibition of velocity dofs associated with Bernardi-Raugel on a 4×4 mesh.	113

Chapter 1: Governing Equations in Mantle Dynamics

1.1 Mechanics in Mantle Dynamics

Extensive studies have been conducted on fluid dynamics of a two-phase mixture. We briefly discuss the four governing equations of mechanics, drawing on a similar discussion presented by Drew and Segel (1971), McKenzie (1984) and Katz (2022).

1.1.1 Phase Fraction

We begin with defining the phase fraction using an indicator function, under the assumption that multiple phases cannot coexist at the same spatial location. Accordingly, the phases are considered immiscible. The indicator function is defined as

$$\chi_i(\mathbf{x}) = \begin{cases} 1 & \text{phase } i, \\ 0 & \text{not phase } i. \end{cases} \quad (1.1)$$

We then define the macroscopic phase fraction function of phase i within a representative volume element V as

$$\phi_i = \frac{1}{V} \int_V \chi_i(\mathbf{x}) d\mathbf{v}, \quad (1.2)$$

where $\sum_i \phi_i = 1$. In the incompressible setting, the phase fraction may be equivalently regarded as the volume fraction occupied by each phase within a representative elementary volume, reflecting the proportion of space occupied by each phase at the macroscopic scale. Phase-averaged (or volume-averaged) quantities, also referred to as bulk quantities, are defined as

$$\bar{\gamma} = \sum_i \phi_i \gamma_i, \quad (1.3)$$

where γ_i denotes a quantity that may be scalar- or vector-valued.

1.1.2 Conservation Laws

We consider the conservation equation for a single-phase system. For a given volumetric quantity γ defined within a representative volume element V , we can write a corresponding conservation equation as:

$$\frac{d}{dt} \int_V \gamma d\mathbf{v} = - \int_{\partial V} \mathbf{f} \cdot d\boldsymbol{\sigma} + \int_V S d\mathbf{v}, \quad (1.4)$$

where $\mathbf{f}$ represents flux travelling across the boundary of a representative volume element V . The minus sign indicates that the positive direction aligns with normal unit vector pointing outwards. The source/sink term S , represents the volumetric production rate of the volumetric quantity γ . We apply Gauss's theorem to obtain the differential form

$$\frac{\partial \gamma}{\partial t} + \nabla \cdot \mathbf{f} = S. \quad (1.5)$$

We model the partially molten mantle as a two-phase mixture consisting of liquid magma and solid mantle. The phase fraction of liquid magma is denoted by ϕ_l and phase fraction of solid mantle is labelled as ϕ_s , such that the relation $\phi_l + \phi_s = 1$ is always obtained.

We rewrite the single-phase conservation law (1.5) with the bulk density as

$$\frac{\partial \bar{\rho}}{\partial t} + \nabla \cdot \bar{\rho} \bar{\mathbf{v}} = 0, \quad (1.6)$$

where $\bar{\rho} = \phi_l \rho_l + \phi_s \rho_s$. Under the Boussinesq approximation, we neglect the compressibility of each individual phase. Furthermore, we extend the Boussinesq approximation by disregarding the density difference between the two phases, except in the body force term. Accordingly, the continuity equation for the two-phase mixture can be written as

$$\nabla \cdot \bar{\mathbf{v}} = 0. \quad (1.7)$$

Similarly, the conservation equation for the phase-averaged momentum takes the form

$$\frac{\partial \bar{\rho} \bar{\mathbf{v}}}{\partial t} + \nabla \cdot \overline{\rho \mathbf{v} \otimes \mathbf{v}} = \bar{\rho} \mathbf{g} + \nabla \cdot \bar{\boldsymbol{\tau}} - \nabla \bar{p}, \quad (1.8)$$

where $\boldsymbol{\tau}$ represents the deviatoric stress. By neglecting inertial effects, justified by the low Reynolds number of magma and mantle, the static force balance equation reduces to

$$\bar{\rho}\mathbf{g} + \nabla \cdot \bar{\boldsymbol{\sigma}} = 0, \quad (1.9)$$

where $\boldsymbol{\sigma} = \boldsymbol{\tau} - p\mathbf{I}$ represents the total stress, consisting of the deviatoric component $\boldsymbol{\tau}$ and the isotropic pressure $p\mathbf{I}$.

1.1.3 Darcy's Law

The equations governing bulk quantities (1.7) and (1.9) alone are insufficient to simultaneously determine the two distinct velocities and pressures. Therefore, an additional constitutive relationship is required to describe the behavior of the liquid phase within the porous medium. We examine more closely the interphase forces between the solid and liquid phases. A brief overview of the derivation of the individual governing equations for each phase is provided here, while more detailed and rigorous treatments can be found in the mixture theory literature, such as Bowen (1980). We write momentum balances for each individual phase as:

$$\begin{aligned} 0 &= \phi_l \rho_l \mathbf{g} + \nabla \cdot (\phi_l \boldsymbol{\tau}_l) - \nabla(\phi_l p_l) + \mathbf{F}_l, \\ 0 &= \phi_s \rho_s \mathbf{g} + \nabla \cdot (\phi_s \boldsymbol{\tau}_s) - \nabla(\phi_s p_s) - \mathbf{F}_s, \end{aligned} \quad (1.10)$$

where $\mathbf{F}_l = \mathbf{F}_s$ are the interphase forces between solid and liquid phases. The interphase forces between the solid and liquid phases are equal and opposite, in accordance with Newton's third law. Neglecting the deviatoric stress in the liquid phase and retaining only the isotropic pressure component, we balance the remaining stress with the viscous drag force and the equilibrium body force. Accordingly, we obtain the following relation for the relative velocity between phases, in alignment with Darcy's law

$$\phi_l(\mathbf{v}_l - \mathbf{v}_s) + \frac{k_{\phi_l}}{\mu_l}(\nabla p_l - \rho_f \mathbf{g}) = 0, \quad (1.11)$$

where k_{ϕ_l} is the matrix permeability, which usually takes the quadratic form as $k_{\phi_l} = k_0 \phi_l^2$.

1.1.4 Compaction

In the context of mantle dynamics, an additional yet unique and essential relationship regulates melt migration. We now revisit the continuous equation (1.6), and consider the two phases separately with the effects of melting incorporated, i.e. ,

$$\begin{aligned}\frac{\partial \phi_l}{\partial t} + \nabla \cdot (\phi_l \mathbf{v}_l) &= \Gamma, \\ \frac{\partial (1 - \phi_l)}{\partial t} + \nabla \cdot ((1 - \phi_l) \mathbf{v}_s) &= -\Gamma,\end{aligned}\tag{1.12}$$

where Γ is the unknown melting rate. We focus on the solid phase equation to get the evolving compaction relationship as

$$\frac{\partial \phi_l}{\partial t} + \mathbf{v}_s \cdot \nabla \phi_l = \Gamma + (1 - \phi_l) \nabla \cdot \mathbf{v}_s,\tag{1.13}$$

where the divergence term $\nabla \cdot \mathbf{v}_s$ is often referred to as the compaction rate. We approximate the static compaction relation as

$$\xi_{\phi_l} \nabla \cdot \mathbf{v}_s = p_l - p_s,\tag{1.14}$$

where ξ_{ϕ_l} is often referred to as bulk viscosity or compaction viscosity. The form of the compaction viscosity ξ_{ϕ_l} has been the subject of extensive discussion. McKenzie (1984) popularized the concept of compaction viscosity and relating the term to the stress balance in a partially molten system. Bercovici et al. (2001) extended this formulation by incorporating surface tension effects. Rabinowicz et al. (2002) further examined compaction behavior in the limit of infinitesimally small porosity. Following the approaches of Hewitt and Fowler (2008) and Katz (2008), we approximate the compaction viscosity ξ_{ϕ_l} using a simplified constitutive relationship,

$$\xi_{\phi_l} = \frac{\mu_s}{\phi_l},\tag{1.15}$$

which highlights the fact that increased melting facilitates the compaction of the solid phase, while in the limit of no melting ($\phi_l = 0$), compaction is entirely eliminated.

1.1.5 Full Static System

By combining equations (1.7), (1.9), (1.11) and (1.14), We finally arrive at the full static flow mechanical system,

$$\phi_l(\mathbf{v}_l - \mathbf{v}_s) + \frac{k_{\phi_l}}{\mu_l}(\nabla p_l - \rho_f \mathbf{g}) = 0, \quad (1.16)$$

$$\nabla \cdot (\phi_l \mathbf{v}_l + \phi_s \mathbf{v}_s) = 0, \quad (1.17)$$

$$\nabla \bar{p} - \nabla \cdot \boldsymbol{\tau}(\mathbf{v}_s) + \bar{\rho} \mathbf{g} = 0, \quad (1.18)$$

$$\mu_s \nabla \cdot \mathbf{v}_s - \phi_l(p_l - p_s) = 0, \quad (1.19)$$

where the deviatoric stress of the solid is

$$\boldsymbol{\tau}(\mathbf{v}_s) = 2\mu_s \phi_s (\mathcal{D}\mathbf{v}_s - \frac{1}{3} \nabla \cdot \mathbf{v}_s \mathbf{I}), \quad (1.20)$$

and $\mathcal{D}\mathbf{v}_s = \frac{1}{2}(\nabla \mathbf{v}_s + \nabla \mathbf{v}_s^T)$ is the symmetric gradient. Moreover, we adjust the relative permeability $k_{\phi_l} = k_0 \phi_l^{2+2\Theta}$ with constant $\Theta \in [0, 1/2]$. Here μ_s and μ_l are dynamic viscosities for solid and liquid respectively. This complete static mechanical system relates the velocities and pressures of the solid and liquid phases to a given porosity distribution, thereby laying the foundation for subsequent computations.

1.1.6 Scaled Formulation

The Darcy equation mathematically degenerates in the regions where the porosity is zero. To handle this issue, we use the formulation developed previously by Arbogast et al. (2017). We first define pressure potentials as

$$q_l = p_l - \rho_l g z \quad \text{and} \quad q_s = p_s - \rho_l g z, \quad (1.21)$$

where $g = |\mathbf{g}|$ is the magnitude of gravity acceleration and z is the depth, such that $\mathbf{g} = g \nabla z$. Note that ρ_l is used to define both potentials, so that with $q = \bar{q} = \bar{p} - \rho_l g z$,

$$p_l - p_s = q_l - q_s = \frac{1}{1 - \phi_l}(q_l - q).$$

In the mechanical system, the subscript on ϕ_l will be omitted. and we will simply write it as ϕ . Accordingly, the solid phase fraction will be expressed as $1 - \phi$, emphasizing the constraint that the two phase fractions sum to one. Thus

$$\phi \mathbf{v}_r + \frac{k_0 \phi^{2+2\Theta}}{\mu_l} \nabla q_l = 0, \quad (1.22)$$

$$\mu_s \nabla \cdot (\phi \mathbf{v}_r) + \frac{\phi}{1 - \phi} (q_l - q) = 0, \quad (1.23)$$

$$\nabla q - \nabla \cdot \tau(\mathbf{v}_s) = -(1 - \phi) \rho_r \mathbf{g}, \quad (1.24)$$

$$\mu_s \nabla \cdot \mathbf{v}_s - \frac{\phi}{1 - \phi} (q_l - q) = 0, \quad (1.25)$$

where the relative velocity $\mathbf{v}_r = \mathbf{v}_l - \mathbf{v}_s$ and the density difference $\rho_r = \rho_s - \rho_l$. Scaled variables are also defined,

$$\tilde{\mathbf{v}}_r = \phi^{-\Theta} \mathbf{v}_r \quad \text{and} \quad \tilde{q}_l = \phi^{1/2} q_l, \quad (1.26)$$

and the problem is reformulated as

$$\tilde{\mathbf{v}}_r + \frac{k_0 \phi^{1+\Theta}}{\mu_l} \nabla (\phi^{-1/2} \tilde{q}_l) = 0, \quad (1.27)$$

$$\mu_s \phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \tilde{\mathbf{v}}_r) + \frac{1}{1 - \phi} (\tilde{q}_l - \phi^{1/2} q) = 0, \quad (1.28)$$

$$\nabla q - \nabla \cdot \tau(\mathbf{v}_s) = -(1 - \phi) \rho_r \mathbf{g}, \quad (1.29)$$

$$\mu_s \nabla \cdot \mathbf{v}_s - \frac{\phi^{1/2}}{1 - \phi} (\tilde{q}_l - \phi^{1/2} q) = 0, \quad (1.30)$$

where the new scaled relative velocity maintains numerical stability in the zero porosity regions.

1.2 Transport of Chemical Species and Energy

With the velocities of solid and liquid phases determined, we are able to evolve our system forward in time. In our system, chemical species and energy are transported by the motion of the solid and the liquid phases.

1.2.1 Transport of Chemical Species

The realistic chemical compositions of mantle and magma are highly complicated and very hard to trace at the same time. Therefore, we present a simple two-species two-phase model. In this framework, we also neglect detailed description of the chemical reaction process and exclude the effect of the change of Gibbs free energies. Similar discussion can be found in the literature like Spiegelman and Elliott (1993), Hewitt and Fowler (2008), Katz (2008) and Hesse et al. (2022). Both species can exist in either the solid or liquid phase. They are assumed to be immiscible in the solid state but fully miscible in the liquid phase. By again extending the Boussinesq approximation, we consider a homogenous density ρ for both the solid phase and the liquid phase. Figure 1.1 illustrates the coexistence of species and phases in representative volume element. Within the representative volume element V , $\gamma_{i,j}$ represents




Figure 1.1: Phases and species in an representative volume element (RVE).

one quantity of the species i present in phase j , where $i \in 1, 2$ and $j \in \{s, l\}$. The mass fraction $c_{i,j}$ of a given species i in phase j is also regarded as a concentration. We can write transport equations for an individual species i , assuming a pseudo melting term Γ representing the transition between the solid and the liquid phase as

$$\frac{\partial}{\partial t}(\phi_l \rho_l c_{i,l}) + \nabla \cdot (\phi_l \rho_l c_{i,l} \mathbf{v}_l - \phi_l \rho_l \mathcal{D}_{i,l} \nabla c_{i,l}) = \Gamma, \quad (1.31)$$

$$\frac{\partial}{\partial t}(\phi_s \rho_s c_{i,s}) + \nabla \cdot (\phi_s \rho_l c_{i,s} \mathbf{v}_s - \phi_s \rho_s \mathcal{D}_{i,s} \nabla c_{i,s}) = -\Gamma, \quad (1.32)$$

where $\mathcal{D}_{i,l}$ and $\mathcal{D}_{i,s}$ are the diffusion coefficients of component i in the liquid and the solid phase respectively. The diffusion term will be dropped in the solid phase. By

summing up equations (1.31) and (1.32), we obtain an advection-diffusion equation as

$$\frac{\partial \overline{\rho c_i}}{\partial t} + \nabla \cdot (\overline{\rho c_i \mathbf{v}} - \phi_l \rho_l \mathcal{D}_{i,l} \nabla c_{i,l}) = 0, \quad (1.33)$$

where the phase averaged quantities are $\overline{\rho c_i} = \sum_{j \in \{s,l\}} \phi_j \rho_j c_{i,j}$ and $\overline{\rho c_i \mathbf{v}} = \sum_{j \in \{s,l\}} \phi_j \rho_j c_{i,j} \mathbf{v}_j$. The subscript i will be omitted, as only one chemical species needs to be explicitly computed in this two-species system. By extending the Boussinesq approximation such that $\rho_l = \rho_s = \bar{\rho}$, the species transport equation can be simplified to the form

$$\frac{\partial \bar{c}}{\partial t} + \nabla \cdot (\bar{c} \mathbf{v} - \phi_l \mathcal{D}_l \nabla c_l) = 0. \quad (1.34)$$

1.2.2 Effective Velocity

The concept of effective velocity has long been employed in chemistry, particularly in the context of particle transport. In mantle dynamics, Spiegelman (1996) applied effective velocity for equilibrium transport of concentration within the liquid phases. We define a corresponding effective velocity for the transport of bulk concentration. To begin, we define the partition coefficient as $D_i = c_{i,s}/c_{i,l}$. The concentration of species i in the liquid and solid phases can be expressed in terms of the bulk concentration as

$$(\phi_l + \phi_s D_i) c_{i,l} = \bar{c}_i, \quad (1.35)$$

$$(\phi_l / D_i + \phi_s) c_{i,s} = \bar{c}_i. \quad (1.36)$$

By expressing $c_{i,l}$ and $c_{i,s}$ with bulk concentration given by equations (1.35) and (1.36), we can rewrite the bulk velocity as

$$\bar{c}_i \mathbf{v} = \phi_s \mathbf{v}_s c_{i,s} + \phi_l \mathbf{v}_l c_{i,l} = \left(\frac{\phi_l \mathbf{v}_l + D_i \phi_s \mathbf{v}_s}{\phi_l + \phi_s D_i} \right) \bar{c}_i. \quad (1.37)$$

We get the proper expression for the effective velocity, denoted as

$$\mathbf{v}_{\text{eff}} = \frac{\phi_l \mathbf{v}_l + D_i \phi_s \mathbf{v}_s}{\phi_l + \phi_s D_i}, \quad (1.38)$$

which is the appropriate velocity at which the bulk concentration should advect. In the absence of melting, where $\phi_l = 0$, we retrieve $\mathbf{v}_{\text{eff}} = \mathbf{v}_s$. Conversely, in the case of complete melting, where $\phi_l = 1$, we obtain $\mathbf{v}_{\text{eff}} = \mathbf{v}_l$. Therefore, the definition of effective velocity is well defined in those two limiting scenarios. We rewrite the transport equation (1.34) with effective velocity (1.38) as

$$\frac{\partial C}{\partial t} = \nabla \cdot (\mathbf{v}_{\text{eff}} C - \phi_l \mathcal{D}_l \nabla c_l) = 0, \quad (1.39)$$

where $C = \bar{c}$ for simplicity.

1.2.3 Transport of Energy

According to the first law of thermodynamics, we write the energy balance equation for the specific internal energy u_i in the phase-averaged form as

$$\frac{\partial \overline{\rho u}}{\partial t} + \nabla \cdot \overline{\rho u \mathbf{v}} = \overline{\rho \mathcal{Q}} + \nabla \cdot \overline{K} \nabla T + \nabla \cdot \overline{\boldsymbol{\sigma}} \cdot \overline{\mathbf{v}} + \overline{\rho \mathbf{v}} \cdot \mathbf{g}, \quad (1.40)$$

where $\overline{K} = \phi_l K_l + \phi_s K_s$ is the phase averaged thermal conductivity. On the left-hand side, the equation represents the time-dependent rate of change of internal energy of a two-phase mixture as it moves with the flow. On the right-hand side, it includes the heat source term $\mathcal{Q}$, conductive heat transfer following Fourier's law, mechanical work done by mixture stress, and work against gravity, respectively.

In a thermochemical equilibrium scenario, we replace internal energy u_i with enthalpy h_i , and use hydrostatic P as a uniform pressure, i.e., $P = \rho_l g(z - z_0)$. The specific enthalpy is defined as

$$h_i = u_i + p_i \tilde{V}_i = u_i + P/\rho_i, \quad (1.41)$$

where $\tilde{V}_i = 1/\rho_i$ is the specific volume. We formulate the enthalpy equation by neglecting the external heating/cooling term $\mathcal{Q}$, mechanical work done by mixture stress and work against gravity, following the discussion presented by Katz (2008), so

$$\frac{\partial \overline{\rho h}}{\partial t} + \nabla \cdot \overline{\rho h \mathbf{v}} = \frac{\partial P}{\partial t} + \overline{\mathbf{v}} \cdot \nabla P + \nabla \cdot \overline{K} \nabla T, \quad (1.42)$$

using (1.17).

1.2.4 Temperature Formulation

We now connect enthalpy and temperature with thermodynamics relationships. To begin with, we write differential form of internal energy as

$$du_i = Tds_i - p_i d\tilde{V}_i. \quad (1.43)$$

We use (1.43) in the differential form of enthalpy as

$$dh_i = du_i + p_i d\tilde{V}_i + \tilde{V}_i dp_i = Tds_i - p_i d\tilde{V}_i + p_i d\tilde{V}_i + \tilde{V}_i dp_i = Tds_i + \frac{dp_i}{\rho_i}, \quad (1.44)$$

and entropy as

$$ds_i = c_p \frac{dT}{T} + \left(\frac{\partial s_i}{\partial p_i} \right)_T dp_i, \quad (1.45)$$

where c_p is the uniform specific heat capacity used for both phases. We replace $\left(\frac{\partial s}{\partial p} \right)_T$ with $-\left(\frac{\partial \tilde{V}_i}{\partial T} \right)_p$ according to Maxwell's fourth relation Campbell (1958). We assume a simple linear relationship between temperature and volume as

$$\frac{\partial \tilde{V}_i}{\partial T} = \alpha_\rho / \rho_i, \quad (1.46)$$

where α_ρ is the thermal expansion coefficient used uniformly for both the liquid and the solid phases. We substitute the entropy equation (1.45) into the enthalpy equation (1.44), so

$$dh_i = c_p dT + \frac{1 - \alpha_\rho T}{\rho_i} dp_i. \quad (1.47)$$

We can expand the divergence term in the equation (1.42) and write for phase i , $i \in \{s, l\}$ as

$$\nabla \cdot (\phi_i \rho_i h_i \mathbf{v}_i) = h_i \nabla \cdot (\phi_i \rho_i \mathbf{v}_i) + \phi_i \rho_i \mathbf{v}_i \cdot \nabla h_i, \quad (1.48)$$

where $\nabla h_i = c_p \nabla T + \frac{1 - \alpha_\rho T}{\rho_i} \nabla p_i$. We now replace the term ∇h_i with the relation (1.46) as

$$\nabla \cdot \overline{\rho h \mathbf{v}} = (h_l - h_s) \nabla \cdot (\phi_l \rho_l \mathbf{v}_l) + h_s \nabla \cdot \overline{\rho \mathbf{v}} + c_p \overline{\rho \mathbf{v}} \cdot \nabla T + (1 - \alpha_\rho T) \overline{\mathbf{v}} \cdot \nabla p_i, \quad (1.49)$$

We substitute the new formulation back to the equation (1.42) and again use lithostatic pressure for approximation as

$$\frac{\partial \bar{\rho h}}{\partial t} + h_s \nabla \cdot \bar{\rho \mathbf{v}} + c_p \bar{\rho \mathbf{v}} \cdot \nabla T = -(h_l - h_s) \nabla \cdot (\phi_l \rho_l \mathbf{v}_l) + \frac{\partial P}{\partial t} + \nabla \cdot \bar{K} \nabla T + \alpha_p T \nabla P, \quad (1.50)$$

where we have $\nabla P = \rho \mathbf{g}$ under the lithostatic pressure approximation.

We integrate enthalpy (1.47) under constant pressure to relate enthalpy and temperature in the sense of thermodynamic state variables as

$$h - h_0 = c_p(T - T_0), \quad (1.51)$$

where the reference values h_0 and T_0 are set as zero for simplicity. Another important physical attribute in the context of melting is latent heat L . We write specific enthalpy in the solid and the liquid phase separately as

$$\begin{aligned} h_s &= c_p T, \\ h_l &= c_p T + L. \end{aligned} \quad (1.52)$$

Under the extended Boussinesq assumption, we rewrite the enthalpy equation with latent heat and temperature under constant pressure ($\partial P / \partial t = 0$) as

$$\frac{\partial \bar{\rho h}}{\partial t} + \rho c_p \nabla \cdot (\bar{\mathbf{v}} T) = \rho L \nabla \cdot (\phi_s \mathbf{v}_s) + \bar{K} \nabla^2 T + \rho \alpha_p T \bar{\mathbf{v}} \cdot \mathbf{g}, \quad (1.53)$$

since $\nabla \cdot (\phi_l \mathbf{v}_l) = -\nabla \cdot (\phi_s \mathbf{v}_s)$ using the continuous equation (1.17), i.e., $\nabla \cdot \bar{\mathbf{v}} = 0$. The last term including gravitational acceleration has previously been referred to as adiabatic cooling or decompression cooling by McKenzie and Bickle (1988). Assuming no density difference between the solid and the liquid phase, we divide ρc_p on both sides of the equation to obtain a normalized form as

$$\frac{\partial \bar{H}}{\partial t} + \nabla \cdot (\bar{\mathbf{v}} T) = \frac{L}{c_p} \nabla \cdot (\phi_s \mathbf{v}_s) + \kappa \nabla^2 T + \frac{\alpha_p}{c_p} T \bar{\mathbf{v}} \cdot \mathbf{g}, \quad (1.54)$$

where $\bar{H} = \bar{\rho h} / \rho c_p = \bar{h} / c_p$ is the bulk specific enthalpy and $\kappa = \bar{K} / \rho c_p$ is the bulk heat diffusivity.

1.3 Eutectic Phase Behavior

With the transport equations defined, we can now proceed to redistribute chemical species and energy within the system. The next step is to determine the thermodynamic state of the system, assuming thermodynamic equilibrium is obtained at each time step. Recognizing that mid-ocean ridges form in regions where temperatures are generally lower, eutectic melting, where the presence of a secondary species significantly lowers the melting temperature, provides a suitable model for describing the melting behavior in these areas.

The binary eutectic system has been widely applied in studies involving chemical equilibrium, with detailed description can be found in textbooks such as Lupis (1983). In the context of mantle dynamics, eutectic melting was being incorporated by Ribe (1985). Moreover, eutectic phase behavior has been applied to solidification of alloys by Wheeler et al. (1996). More recently, binary eutectic melting has also been applied to water-salt-brine systems in glaciers Hesse et al. (2022).

We assume the two primary components in our partially molten system are olivine and orthopyroxene (opx), which are highly miscible in the liquid phase, but immiscible in the solid phase. Olivine is considered to dominate the system, while orthopyroxene is the minor component. Assuming thermodynamic equilibrium is obtained at each time step, we can determine the phase fraction of liquid, the volume fraction of each solid components and the temperature using a binary eutectic phase diagram with transported enthalpy and bulk composition.

A typical eutectic phase diagram is shown in Figure 1.2. There are two key concepts about the diagram:

- the eutectic melting point or eutectic temperature T_e , is the lowest temperature at which melting may occur. Melting at the eutectic temperature is called eutectic melting. The temperature of the system is fixed at the eutectic temperature when eutectic melting happens.

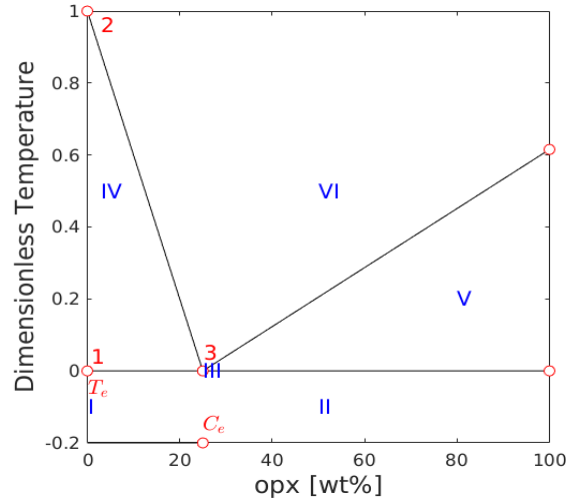


Figure 1.2: Eutectic phase diagram of a Olivine-Orthopyroxene system.

- The eutectic composition C_e is a fixed opx-olivine concentration ratio of the liquid produced by eutectic melting.

1.3.1 Clausius-Clapeyron Relation

In geological contexts, pressure can undergo significant variations during dynamic events such as mantle upwelling. As a result, the influence of pressure on the melting point cannot be neglected. To account for this, we approximate the solidus melting temperature T_m at a given pressure using the approximated Clausius-Clapeyron relationship. We also extend such approximation to eutectic temperature T_e as

$$\begin{aligned} T_m &= T_{m0} + \nu^{-1}(P - P_0), \\ T_e &= T_{e0} + \nu^{-1}(P - P_0), \end{aligned} \tag{1.55}$$

where ν is the Clausius-Clapeyron constant, and P_0 is the reference pressure usually set to be 0. The melting point T_{m0} and eutectic point T_{e0} refer to their respective values at standard atmospheric pressure.

1.3.2 Some Assumptions

In a eutectic system, the current thermodynamic state of the material can be identified using the bulk mass fractions of the components and bulk enthalpy of the system. Our bulk mass fraction will refer to opx in our binary system involving only two components so C is generally small. We begin by introducing some assumptions regarding densities and other material properties.

- We assume no density difference between solid phase olivine and opx, i.e., $\rho_{\text{opx}} = \rho_{\text{olivine}}$;
- We assume no density change during phase transition (extended Boussinesq approximation), i.e., $\rho_l = \rho_s$;
- We assume constant and uniform material thermodynamics properties like specific heat capacity c_p and thermal expansion coefficient α_p .

Following the assumptions, we relate the bulk composition with previously defined phase averaged concentration (1.39) as

$$\frac{\phi_l \rho_l c_l + \phi_s \rho_s c_s}{\phi_l \rho_l + \phi_s \rho_s} = \phi_l c_l + \phi_s c_s = \phi_2 + \phi_l c_l = C, \quad (1.56)$$

where ϕ_2 represents the phase fraction of solid opx. In the later discussion, ϕ_1 will be used to denote the phase fraction of solid olivine. We also express bulk specific enthalpy with temperature and latent heat as

$$\bar{H} = \phi_l h_l / c_p + \phi_s h_s / c_p = \phi_l T + \phi_s T + \phi_l L / c_p = T + \phi_l L / c_p. \quad (1.57)$$

According to equations (1.55), the difference between melting point and eutectic point, which is defined as $\Delta T = T_m - T_e = T_{m0} - T_{e0}$, remains constant regardless of pressure change. At any given pressure, we proceed by dividing by this ΔT to get a dimensionless formulation as

$$\frac{\bar{H}}{\Delta T} = \frac{T}{\Delta T} + \frac{\phi_l L}{c_p \Delta T}. \quad (1.58)$$

Let $\check{L} := \frac{L}{c_p \Delta T}$, $H := \frac{\bar{H}}{\Delta T}$ and $\check{T} := \frac{T}{\Delta T}$. We write the dimensionless enthalpy temperature relationship as

$$H = \check{T} + \phi_l \check{L}. \quad (1.59)$$

1.3.3 Phase Diagram

Binary eutectic melting is usually highly-nonlinear. For simplicity, we adopt a geometric parameterization of the binary eutectic diagram that can be analytically evaluated. We implement a linear eutectic phase boundary to distinguish between different phase regions within the diagram.

The eutectic composition of opx is set as $C_e \approx 0.25$. For illustration only, we plot bulk composition against a renormalized dimensionless temperature $\check{T} - T_e/\Delta T$, where $\check{T}_m - T_e/\Delta T = 1$ and $\check{T}_e - T_e/\Delta T = 0$.

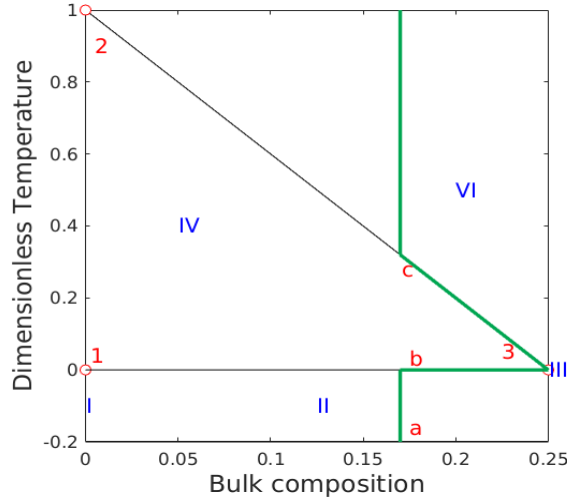


Figure 1.3: Phase diagram when the composition of opx is smaller than the eutectic composition. Region V does not appear.

We identify the following 6 regions with different phase assemblages:

I Single-phase sub-solidus : Olivine;

- II Two-phase sub-solidus : Olivine + Orthopyroxene;
- III Three-phase eutectic : Olivine + Orthopyroxene + melt;
- IV Two-phase super-eutectic : Olivine + melt;
- V Two-phase super-eutectic : Orthopyroxene + melt;
- VI Single-phase super-liquidus : melt.

In a partial melting system, we assume the bulk composition of orthopyroxene (opx) remains below the eutectic composition. Consequently, we focus in the part of the phase diagram Figure 1.2, where the bulk composition is less than the eutectic composition, which is illustrated in the Figure ??.

Melting in the eutectic system is illustrated with the green line in the Figure ??. Now imagining a system containing 17% opx that starts to melting. Starting with all solid phase at Point *a*, the system temperature increase linearly in response to the enthalpy rise. When the temperature reaches the eutectic temperature, at Point *b*, both components of the system start melting with a fixed ratio of 25% opx and 75% olivine, which is the eutectic composition. Once all the solid phase opx is exhausted, the system leaves the eutectic points and solid olivine starts melting. The system climbs up along the line from Point 3 to Point *c*. After the remaining solid olivine has melted, the temperature of the system will continue to rise linearly in response to enthalpy input. It is worth noting that we can reverse the process to obtain a path of equilibrium crystallization.

1.3.4 Phase Split Calculation

A detailed description of the phase-splitting calculations is provided for the regions I, II, III, and IV in this chapter. Regions V and VI are not considered in this study, as we assume that the opx composition remains below the eutectic composition and that only partial melting occurs within the system. We draw a Enthalpy-Composition diagram including the effect of latent heat in the Figure 1.4. Again, we

plot against the renormalized enthalpy $H - T_e/\Delta T$ for simplicity. The individual concentration and temperature are determined using equations (1.56) and (1.59). Follow the previous discussion, we denote the phase fraction of solid olivine as ϕ_1 and the phase fraction of solid opx as ϕ_2 , such that $\phi_1 + \phi_2 = \phi_s$.

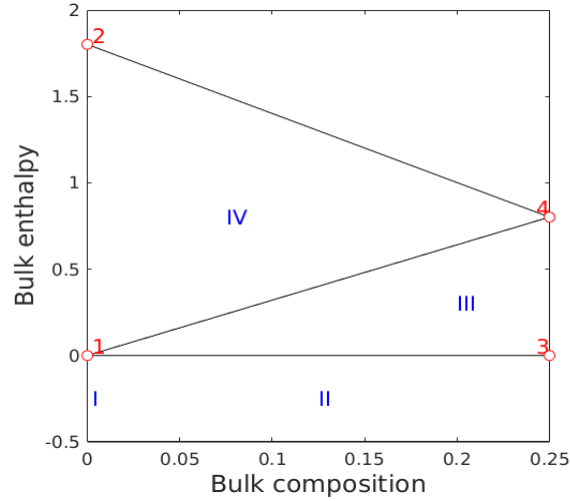


Figure 1.4: Enthalpy-Composition diagram

Region I. Pure olivine in the solid phase. The melting of pure olivine does not follow the eutectic melting path. The conditions to be in the region I are

$$C = 0, \quad H \leq \check{T}_m, \quad (1.60)$$

and we can determine the phase fractions and the temperature as

$$\phi_1 = 1, \quad \phi_2 = \phi_l = 0 \quad \text{and} \quad \check{T} = H. \quad (1.61)$$

We can determine partial derivatives of the temperature with respect to bulk enthalpy and bulk composition as

$$\frac{\partial \check{T}}{\partial H} = 1 \quad \text{and} \quad \frac{\partial \check{T}}{\partial C} = 0. \quad (1.62)$$

Region II. Sub-solidus: Olivine and opx coexist in the solid phase. In this phase region, temperature hasn't reached the eutectic melting temperature. The conditions

to be in the region II are

$$C \neq 0, \quad H \leq \check{T}_e, \quad (1.63)$$

and we can determine the phase fractions and the temperature as

$$\phi_2 = C, \quad \phi_1 = 1 - \phi_2, \quad \phi_l = 0 \quad \text{and} \quad \check{T} = H. \quad (1.64)$$

We can determine partial derivatives of the temperature with respect to the bulk enthalpy and the bulk composition as

$$\frac{\partial \check{T}}{\partial H} = 1 \quad \text{and} \quad \frac{\partial \check{T}}{\partial C} = 0. \quad (1.65)$$

Region III. Two-phase eutectic: The system starts melting at eutectic temperature with a fixed liquid concentration. Both solid phase olivine and orthopyroxene and melt coexist at the same time. Temperature remains at the eutectic point until the opx is exhausted. Concentration of the opx in the melt is also fixed equal to the eutectic composition. The conditions to be in the region III are

$$C \leq C_e, \quad \check{T}_e < H \leq \text{line}_{1-4}, \quad (1.66)$$

where line_{1-4} is defined as $H(C) = \check{T}_e + \check{L}C/C_e$. We can determine the phase fractions and the current temperature as

$$\phi_l = \frac{H - \check{T}_e}{\check{L}}, \quad \phi_2 = C - \phi_l C_e, \quad \phi_1 = 1 - \phi_l - \phi_2 \quad \text{and} \quad \check{T} = \check{T}_e. \quad (1.67)$$

We can determine the partial derivatives of the temperature with respect to the bulk enthalpy and the bulk composition as

$$\frac{\partial \check{T}}{\partial H} = 0 \quad \text{and} \quad \frac{\partial \check{T}}{\partial C} = 0. \quad (1.68)$$

Region IV. Super-eutectic two phase region: All solid phase opx has been exhausted. The concentration of opx in liquid c_l is now approximated with a linear function. The conditions to be in the region IV are

$$C \leq C_e, \quad \text{line}_{1-4} < H \leq \text{line}_{2-4}, \quad (1.69)$$

where line_{2-4} is defined as $H(C) = H_m - c_l/C_e$, and we can determine phase fractions as

$$\phi_2 = 0, \quad \phi_l = \frac{C}{c_l(\check{T})} \quad \text{and} \quad \phi_1 = 1 - \phi_l. \quad (1.70)$$

The corresponding temperature can be determined by solving the following equation

$$F(\check{T}) = H - \check{T} - \frac{C}{c_l(\check{T})}\check{L} = 0. \quad (1.71)$$

Let $c_l = C_e(\check{T}_m - \check{T})$, we can obtain a quadratic equation about temperature as

$$\check{T}^2 - (H + \check{T}_m)\check{T} + \check{T}_m H - CL/C_e = 0, \quad (1.72)$$

which can be solved with standard quadratic root finding formula. We omit the root that exceeding melting temperature, so

$$\begin{aligned} \check{T} &= \frac{H + \check{T}_m - \sqrt{(H + \check{T}_m)^2 - 4(\check{T}_m H - C\check{L}/C_e)}}{2} \\ &= \frac{H + \check{T}_m - \sqrt{(H - \check{T}_m)^2 + 4C\check{L}/C_e}}{2}. \end{aligned} \quad (1.73)$$

We can determine partial derivatives of the temperature with respect to the bulk enthalpy and the bulk composition as

$$\begin{aligned} \frac{\partial \check{T}}{\partial H} &= \frac{1}{2} \left(1 - \frac{H - \check{T}_m}{\sqrt{(H - \check{T}_m)^2 + 4C\check{L}/C_e}} \right), \\ \frac{\partial \check{T}}{\partial C} &= - \frac{\check{L}/C_e}{\sqrt{(H - \check{T}_m)^2 + 4C\check{L}/C_e}}. \end{aligned} \quad (1.74)$$

1.4 Nondimensionalization

Compaction and melting are the two most important aspects of mantle dynamics. We nondimensionlize the scaled formulation with a characteristic length scale related to compaction length and a scaled characteristic Darcy speed of the melt, i.e.,

$$l_0 = \left(\frac{k_0 \mu_s}{\mu_l} \right)^{1/2} \quad \text{and} \quad u_0 = \frac{k_0 \rho_r g}{\mu_l}. \quad (1.75)$$

We define a corresponding characteristic time scale as $t_0 = l_0/u_0$, and a characteristic pressure scale as $p_0 = \rho g l_0$. A set of nondimensional variables are defined as

$$\check{\mathbf{v}}_r = \frac{\mathbf{v}_r}{u_0}, \quad \check{\mathbf{v}}_s = \frac{\mathbf{v}_s}{u_0}, \quad \check{q} = \frac{q}{p_0}, \quad \check{q}_l = \frac{q_l}{p_0}. \quad (1.76)$$

The resulting dimensionless mechanics and transport equations are

$$\check{\mathbf{v}}_r + \phi^{1+\Theta} \nabla (\phi^{-1/2} \check{q}_l) = 0, \quad (1.77)$$

$$\phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{v}}_r) + \frac{1}{1-\phi} (\check{q}_l - \phi^{1/2} \check{q}) = 0, \quad (1.78)$$

$$\nabla \check{q} - \nabla \cdot \check{\tau}(\check{\mathbf{v}}_s) = -(1-\phi) \mathbf{n}, \quad (1.79)$$

$$\nabla \cdot \check{\mathbf{v}}_s - \frac{\phi^{1/2}}{1-\phi} (\check{q}_l - \phi^{1/2} \check{q}) = 0, \quad (1.80)$$

where dimensionless deviatoric stress of the solid phase is $\check{\tau} = 2(1-\phi)(\frac{1}{2}(\nabla \check{\mathbf{v}}_s + \nabla \check{\mathbf{v}}_s^T) - 1/3 \nabla \cdot \check{\mathbf{v}}_s \mathbf{I})$, which maintains the same form as (1.20), and $\mathbf{n}$ is the unit direction vector pointing downwards. Now we rewrite the transport equations with dimensionless variables as

$$\begin{aligned} \frac{\partial C}{\partial \check{t}} + \nabla \cdot (\check{\mathbf{v}}_{\text{eff}} C - \frac{\phi \mathcal{D}_l}{u_0 l_0} \nabla c_l) &= 0, \\ \frac{\partial H}{\partial \check{t}} + \nabla \cdot (\check{\mathbf{v}} \check{T}) - \check{L} \nabla \cdot ((1-\phi) \check{\mathbf{v}}_s) - \frac{\kappa}{u_0 l_0} \nabla^2 \check{T} - \frac{\alpha_\rho l_0}{c_p} \check{T} \check{\mathbf{v}} \cdot \mathbf{g} &= 0. \end{aligned} \quad (1.81)$$

Parameters used in the flow mechanics and thermodynamic computations are listed in Table 1.1. The characteristic values are calculated as

$$l_0 = 3.16 \times 10^5 \text{m}, \quad u_0 = 5.88 \times 10^{-5} \text{m/s}, \quad t_0 = 5.38 \times 10^6 \text{s}, \quad \text{and} \quad p_0 = 9.30 \times 10^9 \text{Pascal}, \quad (1.82)$$

which are

$$l_0 = 316 \text{km}, \quad u_0 = 1.86 \text{km/yr}, \quad t_0 = 0.1705 \text{yrs}. \quad (1.83)$$

Quantity	Value	Units
ρ	3000	$kg \cdot m^{-3}$
ρ_r	600	$kg \cdot m^{-3}$
α_ρ	3×10^{-5}	K^{-1}
c_p	1200	$J \cdot kg^{-1} \cdot K^{-1}$
L	5×10^5	$J \cdot kg^{-1}$
μ_l	1	Pascal $\cdot s$
μ_s	10^{19}	Pascal $\cdot s$
k_0	10^{-8}	m^2
T_{e0}	1480	K
T_{m0}	2000	K
ν	6.5×10^6	Pascal $\cdot K^{-1}$

Table 1.1: Flow Mechanics and Thermodynamics Parameters

Chapter 2: Numerical Methods

In this chapter, we introduce a locally mass conserving numerical framework. A conforming mixed finite element method (MFEM) is proposed to solve the static Darcy-Stokes coupled mechanics system. The proposed conforming MFEM captures the normal fluxes across element edges, ensuring compatibility with local mass conservation. The transport system is solved using a finite volume method (FVM), which inherently ensures local mass conservation.

We begin by introducing the mesh partition used for both the MFEM and the FVM schemes. Based on the mesh partition, two stable element pairs are presented, one for Darcy flow and one for Stokes flow. We then present a novel nonlinear WENO weighting scheme for the FVM. Error estimates are provided for both the MFEM and the FVM schemes.

2.1 Quadrilateral Mesh

We consider a bounded computational domain $\Omega \subset \mathbb{R}^2$, where $\partial\Omega$ denotes the Lipschitz-continuous boundary of the domain. For a given $h > 0$, let $\mathcal{T}_h$ be a *triangulation* of the closure of the domain $\overline{\Omega}$ made of quadrilaterals E , i.e.,

$$\overline{\Omega} = \cup_{E \in \mathcal{T}_h} E, \quad h_E < h, \quad (2.1)$$

where two quadrilaterals are either disjoint or share one edge or one vertex. We assume that the quadrilateral mesh is uniformly shape regular. A formal definition of uniform shape regularity of a quadrilateral mesh is given in Girault and Raviart (2011).

Definition 2.1. For any quadrilateral $E \in \mathcal{T}_h$, form the triangle T_i , $i \in \{0, 1, 2, 3\}$ by excluding vertex v_i from the quadrilateral element E , and use the remaining three

vertices. Let

$$\begin{aligned} h_E &= \text{diameter of Element } E, \\ \rho_E &= 2 \min_{1 \leq i \leq 4} \{\text{diameter of largest circle inscribed in } T_i\}. \end{aligned} \quad (2.2)$$

A mesh partition $\mathcal{T}_h$ is considered to be uniformly shape regular if there exists a shape regularity parameter σ_* independent of $\mathcal{T}_h$, such that for all quadrilaterals $E \in \mathcal{T}_h$,

$$\rho_E/h_E \geq \sigma_* > 0. \quad (2.3)$$

Note that no subtriangle T_i of E has zero measure, i.e., each quadrilateral E is assumed to be strictly convex, not degenerating into a triangle, line or point.

The quadrilateral $E \in \mathcal{T}_h$ is referred to differently depending on the context. In the finite element method, a quadrilateral E is called an *element*, while in the finite volume method, it is typically referred to as a *cell*. For simplicity, we use the term *element* throughout this section.

In Figure 2.1, we show a reference element $\hat{E} = [-1, 1]^2$, a local reference element $\tilde{E}$ and a general quadrilateral element E . The edges of element E are denoted by e_i , $i \in \{0, 1, 2, 3\}$, and the vertices of the element E are denoted as v_i , $i \in \{0, 1, 2, 3\}$, both numbered in the counterclockwise order. We begin counting from zero, first to align with the indexing convention of C++, and second to facilitate representation in terms of modulo arithmetic, which also starts from zero. The vertices can be understood by $v_i = e_i \cap e_{i+1}$, where $i \equiv i \pmod{4}$. Here, $\boldsymbol{\nu}_i$ and $\boldsymbol{\tau}_i$ are used to represent the unit normal and the unit tangent vector respectively. The unit normal vector $\boldsymbol{\nu}_i$ points outwards from the element E . The corresponding unit tangent $\boldsymbol{\tau}_i$ is obtained by rotating $\boldsymbol{\nu}_i$ counterclockwise, following the right-hand rule.

We assume the general quadrilateral element E can be obtained by scaling from the local reference element $\tilde{E}$ such that $\tilde{E} = E/H$, where H is the maximal edge length of E , i.e., the length of edge e_1 in Figure 2.1. Here, $|e_1| = H$ and $|\tilde{e}_1| = 1$. There exists a non-affine bijective and smooth map $\mathbf{F}_{\hat{E}} : \hat{E} \rightarrow \tilde{E}$ mapping the vertices

of $\hat{E}$ to the vertices of $\tilde{E}$. Note that the unit normal and the unit tangent vectors are invariant under the scaling mapping H .

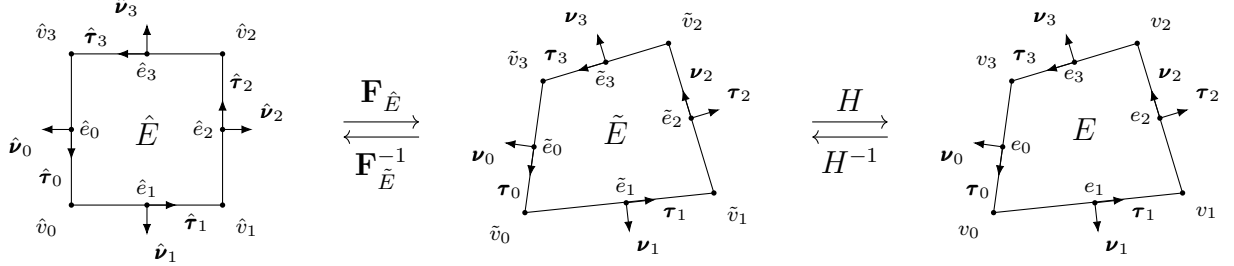


Figure 2.1: An exhibition of a reference square element, a local reference element, and a general non-degenerate quadrilateral element.

For the ease of implementation, we use a logically rectangular mesh, where each element is indexed using Cartesian coordinates $\{i, j\}$. In Figure 2.2, we illustrate a full logically rectangular, quasi-uniform quadrilateral mesh $\mathcal{T}_h$, which is generated by randomly distorting the interior vertices of a square mesh. The boundary vertices $v_i \in \partial\Omega$ remain fixed and are not subject to distortion.

2.2 Mathematical Preliminaries

In this section, we introduce some mathematical concepts that are relied upon in the remainder sections. The theory and notations are presented in a general dimension sense, but in practice, our discussion is confined to two dimension cases. In addition, for simplicity, we restrict our consideration to real-valued functions.

To begin with, we recall the definition of a Sobolev space.

Definition 2.2. Let $\Omega \subset \mathbb{R}^d$ be a domain, $1 \leq p \leq \infty$, and $m \geq 0$ be an integer. The Sobolev space of m derivatives in $L^p(\Omega)$ is

$$W_p^m(\Omega) = \{f \in L^p(\Omega) : D^\alpha f \in L^p(\Omega) \text{ for all multi-indices } \alpha \text{ such that } |\alpha| \leq m\}, \quad (2.4)$$

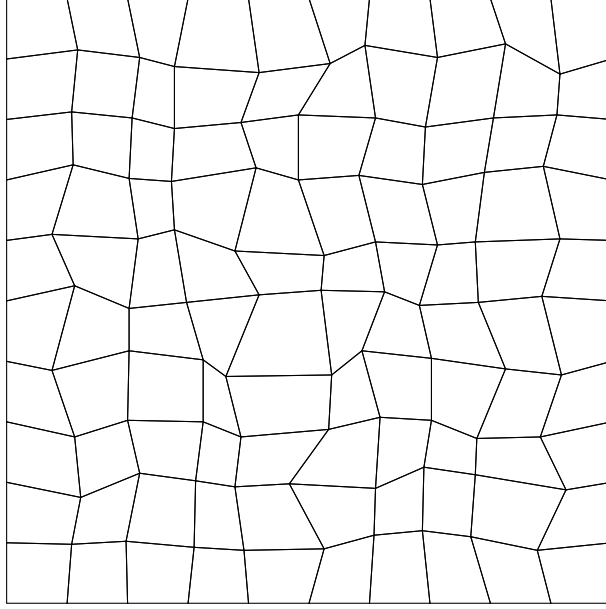


Figure 2.2: An exhibition of a full logically rectangular quasi-uniform quadrilateral mesh $\mathcal{T}_h$.

where the multi-index $\alpha = (\alpha_0, \alpha_1, \dots, \alpha_{N-1}) \in \mathbb{N}^N$ and

$$|\alpha| = \sum_{i=0}^{N-1} \alpha_i.$$

The multi-index derivative is defined as

$$D^\alpha = \frac{\partial^{|\alpha|}}{\partial x_0^{\alpha_0} \dots \partial x_{N-1}^{\alpha_{N-1}}}.$$

For $f \in L^p(\Omega)$, the $L^p(\Omega)$ norm is

$$\|f\|_{L^p(\Omega)} = \begin{cases} \left(\int_{\Omega} |f|^p \right)^{1/p}, & p < \infty, \\ \text{ess sup}_{x \in \Omega} |f(x)|, & p = \infty. \end{cases} \quad (2.5)$$

We proceed with the definition of the Sobolev norm and seminorm.

Definition 2.3. For $f \in W_p^m(\Omega)$, the norm $\|\cdot\|_{W_p^m}$ is

$$\|f\|_{W_p^m(\Omega)} = \left\{ \sum_{|\alpha| \leq m} \|D^\alpha f\|_{L^p(\Omega)}^p \right\}^{1/p}, \quad p < \infty, \quad (2.6)$$

and

$$\|f\|_{W_\infty^m(\Omega)} = \max_{|\alpha| \leq m} \|D^\alpha f\|_{L^\infty(\Omega)}, \quad p = \infty. \quad (2.7)$$

The seminorm $|\cdot|_{W_p^m}$ is

$$|f|_{W_p^m(\Omega)} = \left\{ \sum_{|\alpha|=m} \|D^\alpha f\|_{L^p(\Omega)}^p \right\}^{1/p}, \quad p < \infty. \quad (2.8)$$

In the special case when $p = 2$, we denote $W_2^m(\Omega) = H^m(\Omega)$. The corresponding norm and seminorm are then written as $\|\cdot\|_{H^m(\Omega)}$ and $|\cdot|_{H^m(\Omega)}$ respectively. Recall the Trace Theorem in $H^m(\mathbb{R}^d)$.

Theorem 2.1. (*Trace Theorem*)

Let k and d be integers with $0 < k < d$. The restriction map R extends to a bounded linear map from $H^m(\mathbb{R}^d)$ onto $H^{s-k/2}(\mathbb{R}^{d-k})$, provided that $s > k/2$.

Proof. See Arbogast and Bona (2025). □

Let $\mathbb{P}_r(\omega)$ denote the space of polynomials of degree up to r on $\omega \subset \mathbb{R}^d$. The dimension of $\mathbb{P}_r$ defined on $\mathbb{R}^d$ can be calculated as

$$\dim \mathbb{P}_r(\mathbb{R}^d) = \binom{r+d}{d} = \frac{(r+d)!}{r!d!}. \quad (2.9)$$

For simplicity, we momentarily restrict $d = 2$. Let $\mathbb{Q}_{r,s}(\omega) := \mathbb{P}_r(\omega) \otimes \mathbb{P}_s(\omega)$ denote the space of tensor product polynomials derived by polynomials of degree r in x and s in y on $\omega \subset \mathbb{R}^2$. The dimension of $\mathbb{Q}_{r,s}$ is

$$\dim \mathbb{Q}_{r,s}(\mathbb{R}^2) = \dim \mathbb{P}_r(\mathbb{R}) \times \dim \mathbb{P}_s(\mathbb{R}) = (r+1) \times (s+1). \quad (2.10)$$

We refer to the Bramble-Hilbert lemma for basic interpolation error estimation for polynomials of degree r .

Lemma 2.2. (*Bramble-Hilbert Lemma*)

Let $\Omega \in \mathbb{R}^d$ be a domain, and function $f \in W_p^{k+1}(\Omega)$, $k \geq 0$, $1 \leq p < \infty$. There exists a constant C such that

$$\inf_{p \in \mathbb{P}_k(E)} \|f - p\|_{W_p^m(E)} \leq Ch^{k+1-m} |f|_{W_p^{k+1}(E)}, \quad m = 0, 1, \quad (2.11)$$

where the constant C has an upper bound over all elements $E \in \mathcal{T}_h$ due to the shape regularity assumption.

Proof. See Bramble and Hilbert (1970) and Dupont and Scott (1980b). $\square$

2.3 Direct Serendipity Space

Serendipity finite elements have the same accuracy of approximation with classical tensor product elements while using fewer degrees of freedom. However, the classical serendipity spaces suffer from poor approximation on quadrilaterals. To address this issue, we follow the approach of Arbogast et al. (2022) by defining local shape functions directly on quadrilateral elements, thereby recovering the desired accuracy. In the next sections, H^1 and $H(\text{div})$ conforming direct mixed finite element spaces are constructed with the direct serendipity function spaces.

To begin with, we introduce some auxiliary distance functions. We define the linear polynomial $\lambda_i(\mathbf{x})$ giving the distance of a point at coordinate $\mathbf{x} \in \mathbb{R}^2$ to edge e_i as

$$\lambda_i(\mathbf{x}) = -(\mathbf{x} - \mathbf{x}_i^*) \cdot \boldsymbol{\nu}_i, \quad i = 0, 1, 2, 3, \quad (2.12)$$

where $\mathbf{x}_i^* \in e_i$ is any point on edge e_i . We pick $\mathbf{x}_i^* = \mathbf{x}_{v,i}$ for simplicity, where $\mathbf{x}_{v,i}$ denotes the coordinates of corner v_i . The distance function λ_i returns a positive value as long as the point is located in the interior of the element E .

We define two additional distance functions giving the distance of a point at coordinate $\mathbf{x} \in \mathbb{R}^2$ to the diagonal line d_i joining v_i with v_{i+2} , $i = 0, 1$. Let $\boldsymbol{\nu}_{d,i}$ be the unit normal vector to the diagonal line d_i . The direction of the $\boldsymbol{\nu}_{d,i}$ is defined by

rotating counterclockwise of the unit vector pointing from v_i to v_{i+2} . The resulting diagonal distance function is defined as

$$\lambda_{d,i}(\mathbf{x}) = -(\mathbf{x} - \mathbf{x}_{d,i}^*) \cdot \boldsymbol{\nu}_{d,i}, \quad i = 0, 1, \quad (2.13)$$

where $\mathbf{x}_{d,i}^*$ is any point on the diagonal line d_i . Here, we use the corner point v_i for simplicity, i.e., $\mathbf{x}_{d,i}^* = \mathbf{x}_{v,i}$.

We now present a set of nodal basis functions for the first and second order direct serendipity spaces, $\mathcal{DS}_1$ and $\mathcal{DS}_2$.

2.3.1 Second-order Space $\mathcal{DS}_2$

The dimension of the second-order polynomials in two dimension is calculated by (2.9) as

$$\dim \mathbb{P}_2(\mathbb{R}^2) = \binom{2+2}{2} = \frac{(4)!}{2!2!} = 6, \quad (2.14)$$

while a quadrilateral element requires a minimum of 4 vertex dofs and 4 edge dofs. Therefore, we supplement polynomial space $\mathbb{P}_2(E)$ with two linearly independent functions, $\phi_{s,1}(\mathbf{x})$ and $\phi_{s,2}(\mathbf{x})$, spanning the supplemental function space $\mathbb{S}_r^{\mathcal{DS}}(E) = \text{span}\{\phi_{s,1}, \phi_{s,2}\}$, $r \geq 2$. We present the second-order direct serendipity space as

$$\mathcal{DS}_2(E) = \mathbb{P}_2(E) \oplus \mathbb{S}_2^{\mathcal{DS}}(E). \quad (2.15)$$

The supplemental functions are defined as

$$\phi_{s,i}(\mathbf{x}) = \lambda_{i+1}(\mathbf{x})\lambda_{i+2}(\mathbf{x})R_{i,i+2}(\mathbf{x}), \quad i \in \{0, 1\}. \quad (2.16)$$

We use a simple definition for rational function $R_{i,i+2}$ as

$$R_{i,i+2}(\mathbf{x}) = \frac{\lambda_i(\mathbf{x}) - \lambda_{i+2}(\mathbf{x})}{\lambda_i(\mathbf{x}) + \lambda_{i+2}(\mathbf{x})}, \quad (2.17)$$

which satisfies the conditions

$$R_{i,i+2}|_{e_i} = -1, \quad R_{i,i+2}|_{e_{i+2}} = 1. \quad (2.18)$$

We continue to define

$$R_i(\mathbf{x}) = \frac{1}{2} \left(1 - R_{i,i+2}(\mathbf{x}) \right) = \frac{\lambda_{i+2}(\mathbf{x})}{\lambda_i(\mathbf{x}) + \lambda_{i+2}(\mathbf{x})}, \quad i \in \{0, 1, 2, 3\}, \quad (2.19)$$

where $i \equiv i \pmod{4}$ as usual, and $R_{i,i+2} = -R_{i+2,i}$ according to the equation (2.17). Here, $R_i|_{e_i} = 1$, and $R_i|_{e_{i+2}} = 0$ by definition. In Figure 2.3, we draw R_0 on a general quadrilateral element, which evaluates to 1 on edge e_0 , and evaluates to 0 on the opposite edge e_2 .

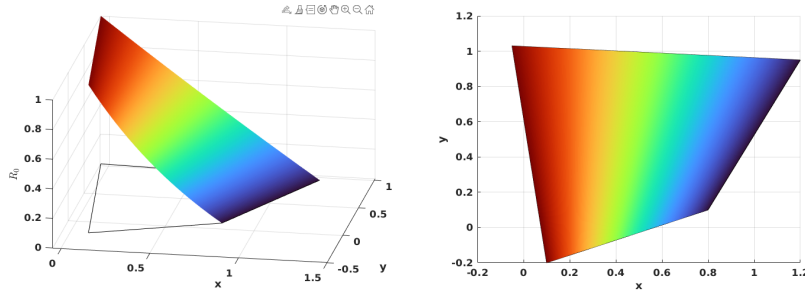


Figure 2.3: Rational function R_0 .

The edge nodal basis functions for $\mathcal{DS}_2$ are constructed as

$$\varphi_{e,i}^{(2)}(\mathbf{x}) = \frac{\lambda_{i+1}(\mathbf{x})\lambda_{i+3}(\mathbf{x})R_i(\mathbf{x})}{\lambda_{i+1}(\mathbf{x}_{e,i})\lambda_{i+3}(\mathbf{x}_{e,i})R_i(\mathbf{x}_{e,i})}, \quad (2.20)$$

where $\mathbf{x}_{e,i}$ are the coordinates of the middle point of the edge e_i , again $i \equiv i \pmod{4}$. We use superscript (2) to denote the order of the function space. We can restrict the edge basis function to edges as

$$\varphi_{e,i}^{(2)}|_{e,j} = \begin{cases} \frac{\lambda_{i+1}(\mathbf{x})\lambda_{i+3}(\mathbf{x})}{\lambda_{i+1}(\mathbf{x}_{e,i})\lambda_{i+3}(\mathbf{x}_{e,i})}, & i = j, \\ 0, & i \neq j. \end{cases} \quad (2.21)$$

In Figure 2.4, we present edge basis function $\varphi_{e,0}^{(2)}$ on a general quadrilateral element, where $\varphi_{e,0}^{(2)}$ evaluates 0 on edges $\{e_i, \quad i \neq 0\}$, and evaluates to a quadratic function on edge e_0 .

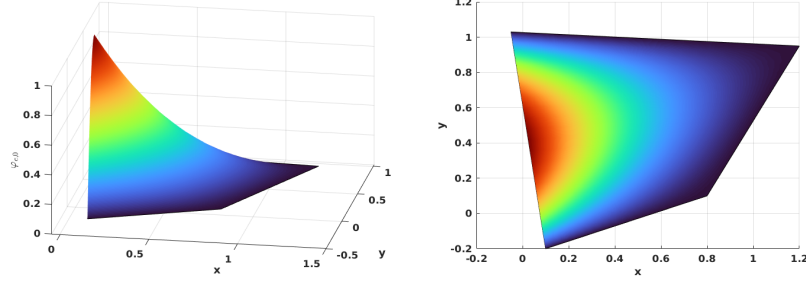


Figure 2.4: Edge nodal basis function $\varphi_{e,0}^{(2)}$ in $\mathcal{DS}_2$.

The vertex nodal basis functions for $\mathcal{DS}_2$ are constructed as

$$\varphi_{v,i}^{(2)}(\mathbf{x}) = \frac{\lambda_{i+2}(\mathbf{x})\lambda_{i+3}(\mathbf{x}) - \sum_{k=i}^{i+1} \lambda_{i+2}(\mathbf{x}_{e,i})\lambda_{i+3}(\mathbf{x}_{e,i})\varphi_{e,i}^2(\mathbf{x})}{\lambda_{i+2}(\mathbf{x}_{v,i})\lambda_{i+3}(\mathbf{x}_{v,i}) - \sum_{k=i}^{i+1} \lambda_{i+2}(\mathbf{x}_{e,i})\lambda_{i+3}(\mathbf{x}_{e,i})\varphi_{e,i}^{(2)}(\mathbf{x}_{v,i})}, \quad (2.22)$$

where $\mathbf{x}_{v,i}$ is the coordinates of the vertex node v_i , and $i \equiv i \pmod{4}$ as well. At the nodal points

$$\varphi_{v,i}^{(2)}(\mathbf{x}) = \begin{cases} 1, & \mathbf{x} = \mathbf{x}_{v,i}, \\ 0, & \mathbf{x} = \mathbf{x}_{v,j} \text{ or } \mathbf{x}_{e,k}, \quad j \neq i, \forall k. \end{cases} \quad (2.23)$$

In Figure 2.5, we show $\varphi_{v,0}^{(2)}$ on a general quadrilateral.

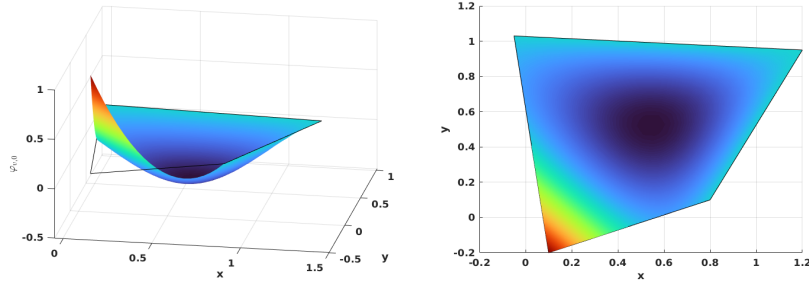


Figure 2.5: Vertex nodal basis function $\varphi_{v,0}^{(2)}$ in $\mathcal{DS}_2$.

We conclude that unisolvence follows directly from the constructed nodal basis functions.

2.3.2 First-order Space $\mathcal{DS}_1$

The dimension of the first-order polynomials in two dimension is also calculated by equation (2.9) as

$$\dim \mathbb{P}_1(\mathbb{R}^2) = \binom{1+2}{2} = \frac{(3)!}{2!1!} = 3, \quad (2.24)$$

while a quadrilateral element requires a minimum of 4 vertex dofs. Therefore, we supplement polynomial space $\mathbb{P}_1(E)$ with one additional function. The supplemental function for $\mathcal{DS}_1$ differs from that for $\mathcal{DS}_2$. We present the first order direct serendipity space as

$$\mathcal{DS}_1(E) = \mathbb{P}_1(E) \oplus \text{span}\{R\}, \quad (2.25)$$

where $R(\mathbf{x}_{v,0}) = R(\mathbf{x}_{v,2}) = -R(\mathbf{x}_{v,1}) = -R(\mathbf{x}_{v,3}) = 1$. The construction of the rational function R is not unique. We present one way to construct $R(\mathbf{x})$ using edge nodal basis function (2.20) in $\mathcal{DS}_2$ as

$$R(\mathbf{x}) = r(\mathbf{x}) - \sum_{i=0}^3 r(\mathbf{x}_{e,i}) \varphi_{e,i}^{(2)}(\mathbf{x}), \quad (2.26)$$

where the auxiliary function $r(\mathbf{x})$ is defined as

$$r(\mathbf{x}) = \frac{\lambda_2(\mathbf{x})\lambda_3(\mathbf{x})}{\lambda_2(\mathbf{x}_{v,0})\lambda_3(\mathbf{x}_{v,0})} - \frac{\lambda_0(\mathbf{x})\lambda_3(\mathbf{x})}{\lambda_0(\mathbf{x}_{v,1})\lambda_3(\mathbf{x}_{v,1})} + \frac{\lambda_0(\mathbf{x})\lambda_1(\mathbf{x})}{\lambda_0(\mathbf{x}_{v,2})\lambda_1(\mathbf{x}_{v,2})} - \frac{\lambda_1(\mathbf{x})\lambda_2(\mathbf{x})}{\lambda_1(\mathbf{x}_{v,3})\lambda_2(\mathbf{x}_{v,3})}. \quad (2.27)$$

In Figure 2.6, we plot the rational function $R(\mathbf{x})$ on a general quadrilateral.

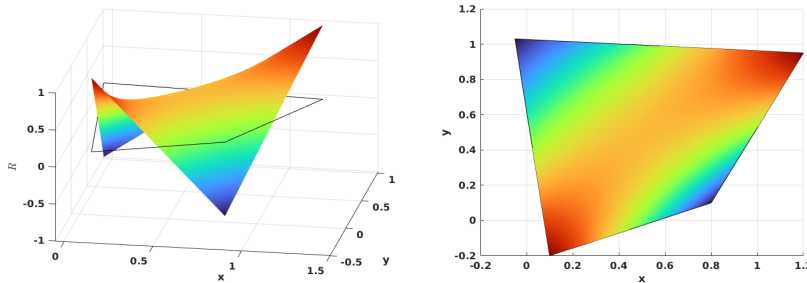


Figure 2.6: Supplemental rational function R in $\mathcal{DS}_1$.

We then define vertex nodal basis function accordingly as

$$\varphi_{v,i}^{(1)}(\mathbf{x}) = \frac{\lambda_{d,m}(\mathbf{x}) - \frac{1}{2}\lambda_{d,m}(\mathbf{x}_{v,i+2})(1 + (-1)^i R(\mathbf{x}))}{\lambda_{d,m}(\mathbf{x}_{v,i}) - \lambda_{d,m}(\mathbf{x}_{v,i+2})}, \quad (2.28)$$

where $m \equiv i+1 \pmod{2}$, and $i \equiv i \pmod{4}$. In Figure 2.7, we show the vertex nodal basis function $\varphi_{v,0}^{(1)}$ in $\mathcal{DS}_1$ on a general quadrilateral, which evaluates 1 at vertex v_0 and 0 at other vertices.

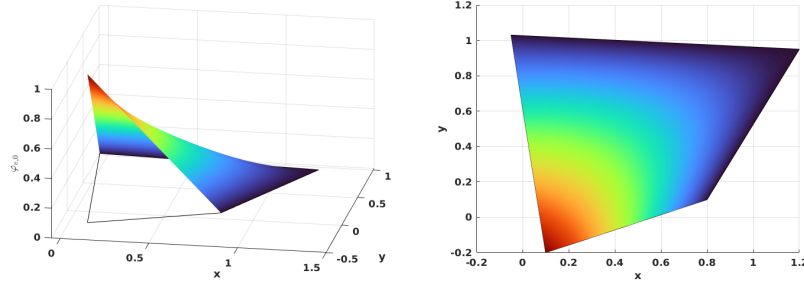


Figure 2.7: Vertex nodal basis function in $\mathcal{DS}_1$.

2.3.3 An Interpolation Operator

For completeness, we describe an interpolation operator mapping onto $\mathcal{DS}_r(K_i)$, $r = 1, 2$, following Arbogast et al. (2022). For each node a_i , the associated K_i has different meanings depending on the type of the nodal basis functions. If the basis function is associated with an edge node, we set $K_i = e_i$, where e_i is the corresponding edge. For the basis function associated with a vertex node, we set K_i to be any edge e containing node a_i , with the restriction that if $a_i \in \partial\Omega$, then $e \in \partial\Omega$.

An interpolation operator $\mathcal{J}_h^r : W_p^l(\Omega) \rightarrow \mathcal{DS}_r$ is defined as

$$\mathcal{J}_h^r v(\mathbf{x}) = \sum_{i=1}^{N_r} \varphi_i(\mathbf{x}) \int_{K_i} \psi_i(\mathbf{y}) v(\mathbf{y}) d\mathbf{y} \in \mathcal{DS}_r, \quad (2.29)$$

where $1 \leq p \leq \infty$ and $l > 1/p$ (but $l \geq 1$ if $p = 1$), and $\psi(\mathbf{x})$ is the dual nodal basis such that

$$\int_{K_i} \psi_i(\mathbf{x}) \varphi_j(\mathbf{x}) d\mathbf{x} = \delta_{i,j}, \quad i, j \in \{0, 1, 2, \dots, N_r\}, \quad (2.30)$$

where N_r is the number of nodal basis functions. We present the following two lemmas regarding the constructed interpolation operator.

Lemma 2.3. *(Boundedness of the interpolation operator.)*

Let $\mathcal{T}_h$ be uniformly shape regular according to Definition 2.3 with shape regularity parameter σ_* . Let $v \in W_p^l(\Omega)$, with $1 \leq p \leq \infty$ and $l > q/p$. Moreover, assume that $R_{i,i+2}$ is a uniformly differentiable functions of the vertices of E up to order m . Then for $r = 1, 2$, $E \in \mathcal{T}_h$, $1 \leq q \leq \infty$, and any non negative integer m ,

$$\|\mathcal{I}_h^r v\|_{W_q^m(E)} \leq C(\sigma_*, m, q) \sum_{k=0}^l h_E^{k-m+\frac{2}{q}-\frac{2}{p}} |v|_{W_p^k(E^*)}, \quad (2.31)$$

where $E^* = \cup_{F \in \mathcal{T}_h, F \cap E \neq \emptyset} F$ and $|\cdot|_{W_p^k}$ is the seminorm of k -th order derivatives.

Proof. See Arbogast et al. (2022). □

Combining Lemma 2.3 and the Bramble-Hilbert lemma 2.2, we obtain local and global error estimation.

Lemma 2.4. *(Approximability of the interpolation operator.)*

Under the assumption of Lemma 2.3, there exists a constant $C = C(r, \sigma_*) > 0$ such that for all functions $v \in W_{l,p}(E^*)$, with $1 \leq p \leq \infty$ and $l > 1/p$ or ($l \geq 1$ if $p = 1$),

$$\|v - \mathcal{I}_h^r v\|_{W_p^m(E)} \leq C h_E^{l-m} |v|_{W_p^l(E^*)}, \quad 0 \leq m \leq \min(l, r+1). \quad (2.32)$$

Moreover, there exists a constant $C = C(r, \sigma_*) > 0$, independent of $h = \max_{E \in \mathcal{T}} h_E$, such that for all functions $v \in W_p^l(\Omega)$, $p < \infty$

$$\left(\sum_{E \in \mathcal{T}_h} \|v - \mathcal{I}_h^r v\|_{W_p^m(E)}^p \right)^{1/p} \leq C h^{l-m} |v|_{W_p^l(\Omega)}, \quad 0 \leq m \leq \min(l, r+1). \quad (2.33)$$

Proof. See Arbogast et al. (2022). □

2.4 Mixed Finite Elements

In this section, we describe our mixed finite element approximation for the scaled coupled system (1.77)–(1.80). We begin by presenting the mixed variational formulations of the Stokes and Darcy model problems separately. Subsequently, we introduce H^1 - and $H(\text{div})$ -conforming mixed finite element spaces. We describe the construction of mixed finite elements from the aforementioned direct serendipity space. Recall Ciarlet’s definition Ciarlet (2002) of a finite element.

Definition 2.4. A triple $(E, X(E), \{\phi_1, \dots, \phi_n\})$ defines a *finite element*, where

- The element $E \in \mathcal{T}_h$;
- The space of shape functions is $X(E)$ with basis $\{\varphi_1, \dots, \varphi_n\}$, where the dimension of the shape function space is $\dim(X(E)) = n$;
- A set of continuous and linear functionals is $\{\phi_1, \dots, \phi_n\}$, defined on a subset $\mathcal{X}(E)$ of the energy space containing the finite element space $X(E)$ as

$$\phi_j : \mathcal{X}(E) \rightarrow \mathbb{R}, \quad (2.34)$$

such that the unisolvence condition is achieved as

$$\langle \phi_j, \varphi_i \rangle = \delta_{ij}, \quad i, j \in \{1, 2, 3, \dots, n\}. \quad (2.35)$$

In later subsections, we give an explicit construction of the nodal basis functions and degrees of freedom (values of the ϕ_j , $j = 1, 2, \dots, n$) that is associated to them, thereby completing the definition of the finite element.

2.4.1 A Darcy Model Problem

Consider a model problem for Darcy flow equipped with homogeneous boundary condition as

$$\begin{aligned} \mathbf{u} + \nabla p &= \mathbf{f}, \quad \text{in } \Omega, \\ \nabla \cdot \mathbf{u} &= 0, \quad \text{in } \Omega, \\ \mathbf{u} \cdot \boldsymbol{\nu} &= 0, \quad \text{on } \partial\Omega. \end{aligned} \quad (2.36)$$

We seek the displacement and pressure solution pair $(\mathbf{u}, p)$ in the identical test and trial spaces

$$\begin{aligned}\mathbb{V}_D &= \{\mathbf{v} \in (H(\text{div}; \Omega))^2 : \mathbf{v} \cdot \boldsymbol{\nu} = \mathbf{0} \text{ on } \partial\Omega\}, \\ \mathbb{U}_D &= \{\mathbf{u} \in (H(\text{div}; \Omega))^2 : \mathbf{u} \cdot \boldsymbol{\nu} = \mathbf{0} \text{ on } \partial\Omega\} = \mathbb{V}_D, \\ \mathbb{W}_D &= \left\{ p \in L^2(\Omega) : \int_{\Omega} p \, d\mathbf{x} = 0 \right\} = L^2(\Omega)/\mathbb{R}.\end{aligned}\tag{2.37}$$

The standard mixed weak form reads as follows:

Find $\mathbf{u} \in \mathbb{U}_D$ and $p \in \mathbb{W}_D$ such that

$$\begin{aligned}(\mathbf{u}, \mathbf{v}) - (p, \nabla \cdot \mathbf{v}) &= (\mathbf{f}, \mathbf{v}), \quad \forall \mathbf{v} \in \mathbb{V}_D, \\ (\nabla \cdot \mathbf{u}, \omega) &= 0, \quad \forall \omega \in \mathbb{W}_D.\end{aligned}\tag{2.38}$$

We introduce two finite-dimensional subspaces $\mathbb{V}_{D,h} \subset \mathbb{V}_D$ and $\mathbb{W}_{D,h} \subset \mathbb{W}_D$, and consider the discretized problem:

Find $(\mathbf{u}_h, p_h) \in \mathbb{V}_{D,h} \times \mathbb{W}_{D,h}$ such that

$$\begin{aligned}(\mathbf{u}_h, \mathbf{v}_h) - (p_h, \nabla \cdot \mathbf{v}_h) &= (\mathbf{f}, \mathbf{v}_h), \quad \forall \mathbf{v}_h \in \mathbb{V}_{D,h}, \\ (\nabla \cdot \mathbf{u}_h, \omega_h) &= 0, \quad \forall \omega_h \in \mathbb{W}_{D,h}.\end{aligned}\tag{2.39}$$

In the next subsection, we present a construction of the discretized space pair $\mathbb{V}_{D,h} \times \mathbb{W}_{D,h}$ for this Darcy model problem.

2.4.2 A Reduced $H(\text{div})$ Conforming Space $\mathbb{V}_1^0$

We have some choice to discretize the space $\mathbb{V}_D$. For example, we can choose the classical Raviart-Thomas element Raviart and Thomas (1977). The serendipity space is the natural precursor of the Brezzi-Douglas-Marini element Brezzi et al. (1985) related by a de Rham complex. We generate a reduced first-order $H(\text{div})$ approximation from the direct serendipity space, where $\nabla \cdot \mathbf{u}$ is approximated one less order than approximation of $\mathbf{u}$. We can also recover the Arbogast-Correa element Arbogast and Correa (2016) if we use the mapped serendipity space, as defined in that paper.

We write the de Rham exact sequence for the related energy spaces as

$$\begin{array}{ccccccc}
\mathbb{R} & \xhookrightarrow{i} & H^1 & \xrightarrow{\text{curl}} & H(\text{div}) & \xrightarrow{\text{div}} & L^2 \xrightarrow{0} 0 \\
& & \cup & & \cup & & \cup \\
& & \mathcal{DS}_2 & \xrightarrow{\text{curl}} & \mathbf{V}_1^0 & \xrightarrow{\text{div}} & \mathbb{P}_0
\end{array} \quad (2.40)$$

We define the reduced first-order $H(\text{div})$ conforming space as the first-order polynomial space supplemented with the curl of the second-order direct serendipity supplemental space of $\mathcal{DS}_2$, i.e.,

$$\mathbb{V}_1^0(E) = (\mathbb{P}_1(E))^2 \oplus \text{curl } \mathbb{S}_2^{\mathcal{DS}}(E). \quad (2.41)$$

Here, $\mathbb{V}_1^0(E)$ can be given a global basis with the normal components of the shape functions merged continuously on the shared edge of two elements.

The dimension of this reduced first-order $H(\text{div})$ conforming space is

$$\dim(\mathbb{V}_1^0(E)) = 2 \times 3 + 2 = 8. \quad (2.42)$$

On each edge of a quadrilateral element E , two independent basis functions are defined: one with vanishing average normal flux across the edge, and the other with non-vanishing average flux.

We state the degrees of freedom as normal fluxes on each edge as

$$DOF_{e_i}(\lambda_1) = \langle \mathbf{u}_h \cdot \boldsymbol{\nu}_i, \lambda_1 \rangle_{e_i}, \quad \lambda_1 \in \mathbb{P}_1, \quad (2.43)$$

where λ_1 is a linear function restricted to edge e_i , and $\dim(\mathbb{P}_1) = 2$. We then present a construction of two independent shape functions on each edge: $\boldsymbol{\varphi}_{l,i}$ and $\boldsymbol{\varphi}_{c,i}$, such that

$$\boldsymbol{\varphi}_{c,i} \cdot \boldsymbol{\nu}_j|_{e_j} = \begin{cases} 0, & j \neq i, \\ 1, & j = i. \end{cases} \quad (2.44)$$

$$\boldsymbol{\varphi}_{l,i} \cdot \boldsymbol{\nu}_j|_{e_j} = \begin{cases} 0, & j \neq i, \\ l_i(\mathbf{x}), & j = i, \end{cases} \quad (2.45)$$

where l_i is a non vanishing linear polynomial defined on edge e_i orthogonal to one, i.e., $\int_{e_i} l_i ds = 0$.

To begin with, we take the curl of the auxiliary rational function R_i (2.17) as

$$\text{curl } R_i(\mathbf{x}) = \frac{\boldsymbol{\tau}_{i+2}(\mathbf{x})\lambda_i(\mathbf{x}) - \boldsymbol{\tau}_i(\mathbf{x})\lambda_{i+2}(\mathbf{x})}{(\lambda_i(\mathbf{x}) + \lambda_{i+2}(\mathbf{x}))^2}, \quad (2.46)$$

where $i \equiv i \pmod{4}$. We present one way to construct the “linear” shape function $\boldsymbol{\varphi}_{l,i}$ in two steps as

$$\tilde{\boldsymbol{\varphi}}_{l,i} = \text{curl}(\lambda_{i+1}\lambda_{i+3}R_i) = (\boldsymbol{\tau}_{i+1}\lambda_{i+3} + \lambda_{i+1}\boldsymbol{\tau}_{i+3})R_i + \lambda_{i+1}\lambda_{i+3}\text{curl}R_i. \quad (2.47)$$

We then normalize it such that l_i varies from -1 to 1 when restricted to edge e_i as

$$\boldsymbol{\varphi}_{l,i} = \frac{\tilde{\boldsymbol{\varphi}}_{l,i}(\mathbf{x})|e_i|}{4\lambda_{i+1}(\mathbf{x}_{e,i})\lambda_{i+3}(\mathbf{x}_{e,i})R_i(\mathbf{x}_{e,i})}, \quad (2.48)$$

where the index $i \equiv i \pmod{4}$, and the length of edge e_i is $|e_i| = |\mathbf{x}_{v,i} - \mathbf{x}_{v,i+3}|$. In Figure 2.8, we draw $\boldsymbol{\varphi}_{l,2}$ on the left element and $\boldsymbol{\varphi}_{l,0}$ on the right element sharing an edge, and show the normal flux, but not the tangential flux joining continuously as a linear function on the shared edge.

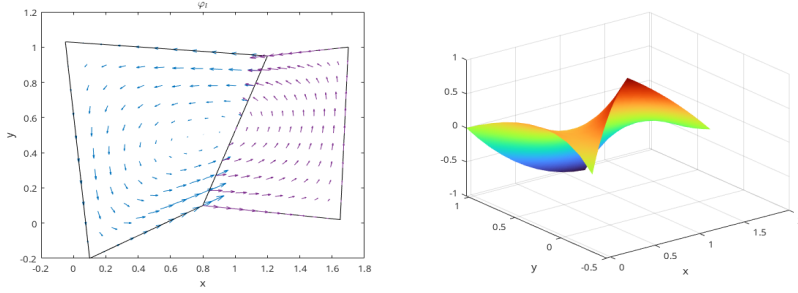


Figure 2.8: “Linear” shape function $\boldsymbol{\varphi}_l$.

The construction of the constant basis functions is a bit more complicated. We follow the process by Arbogast et al. (2022). We start by defining a linear nodal function $\phi_{v,i}^* \in \mathcal{DS}_2(E)$ such that $\phi_{v,i}^*(\mathbf{x}_{v,k}) = \delta_{ik}$. Its restriction to each edge of E is a linear function as

$$\phi_{v,i}^*(\mathbf{x}) = \phi_{v,i}^2(\mathbf{x}) + \frac{1}{2}[\varphi_{e,i}^2 + \varphi_{e,i+1}^2], \quad (2.49)$$

where $i \equiv i \pmod{4}$. We then define $\boldsymbol{\varphi}_{v,i}^*(\mathbf{x}) = \text{curl } \phi_{v,i}^*$ so that

$$\boldsymbol{\varphi}_{v,i}^* \cdot \boldsymbol{\nu}_j|_{e,j} = \begin{cases} 1/|e_i|, & j = i, \\ -1/|e_i|, & j = i + 1, \\ 0, & j = i + 2, i + 3. \end{cases} \quad (2.50)$$

The “constant” basis function on the edge can now be defined as

$$\boldsymbol{\varphi}_{c,i} = \frac{(\mathbf{x}_{v,i} - \mathbf{x}_{v,i+2}) \cdot \boldsymbol{\nu}_{i+1}|e_{i+1}|\boldsymbol{\varphi}_{v,i}^* + \mathbf{x} - \mathbf{x}_{v,i+2}}{(\mathbf{x}_{v,i} - \mathbf{x}_{v,i+2}) \cdot \boldsymbol{\nu}_{i+1}|e_{i+1}|/|e_i| + (\mathbf{x}_{v,i} - \mathbf{x}_{v,i+2}) \cdot \boldsymbol{\nu}_i}, \quad (2.51)$$

where $i \equiv i \pmod{4}$. The “constant” shape function $\boldsymbol{\varphi}_{c,i}$ has a normal flux of constant value 1 on edge e_i and evaluates to 0 normal flux on all the other edges. In Figure 2.9, we draw $\boldsymbol{\varphi}_{c,2}$ on the left element and $\boldsymbol{\varphi}_{c,0}$ on the right element sharing an edge, and show that the normal flux joins continuously as a constant 1 on the shared edge.

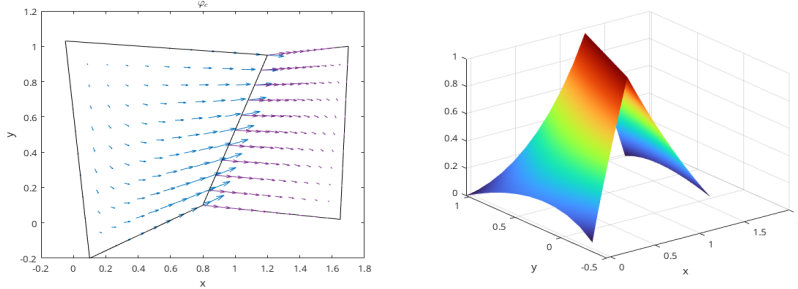


Figure 2.9: “Constant” shape function $\boldsymbol{\varphi}_c$.

2.4.3 Stability and Approximation Properties for $\mathbb{V}_1^0$

The accuracy and stability of $\mathbb{V}_1^0$ has been well studied and tested in the work by Arbogast et al. (2022). We state the result directly for completeness. They define a projection operator π that preserves element average divergence and average edge normal fluxes,

$$\pi : H(\text{div}; \Omega) \cap (L^{2+\epsilon}(\Omega))^2 \rightarrow \mathbb{V}_1^0, \quad (2.52)$$

where $\epsilon > 0$. This global projection operator π is a combination of local operators π_E defined on each element E according to the degrees of freedom. The operator π

also satisfies the commuting diagram property

$$\mathcal{P}_{W_0} \nabla \cdot \mathbf{v} = \nabla \cdot \pi \mathbf{v}, \quad (2.53)$$

where $\mathcal{P}_{W_0}$ is the L^2 -orthogonal projection operator onto $W_0 = \nabla \cdot \mathbb{V}_1^0$, which is a space of piecewise constant values.

Lemma 2.5. *Stability and approximation properties for $\mathbb{V}_1^0$.*

Under the assumptions of Lemma 2.3 and Lemma 2.2, there exists a constant $C > 0$, independent of $\mathcal{T}_h$ and $h > 0$, such that

$$\begin{aligned} \|\mathbf{u} - \pi_D \mathbf{u}\|_{0,\Omega} &\leq C \|\mathbf{u}\|_{k,\Omega} h^k, & k = 1, 2, \\ \|\nabla \cdot (\mathbf{u} - \pi_D \mathbf{u})\|_{0,\Omega} &\leq C \|\nabla \cdot \mathbf{u}\|_{k,\Omega} h^k, & k = 0, 1, \\ \|p - \mathcal{P}_{W_s} p\|_{0,\Omega} &\leq C \|p\|_{k,\Omega} h^k, & k = 0, 1. \end{aligned} \quad (2.54)$$

Moreover, the discrete inf-sup condition holds

$$\sup_{\mathbf{v}_h \in \mathbb{V}_1^0} \frac{(\omega_h, \nabla \cdot \mathbf{v}_h)}{\|\mathbf{v}_h\|_{H(\text{div})}} \geq \gamma \|\omega_h\|_{0,\Omega}, \quad \forall \omega_h \in W_0, \quad (2.55)$$

for some $\gamma > 0$ independent of $\mathcal{T}_h$ and $h > 0$.

Proof. See Arbogast et al. (2022). □

2.4.4 A Stokes Model Problem

Consider a model problem of an incompressible isotropic equation equipped with homogeneous boundary condition as

$$\begin{aligned} -\Delta \mathbf{u} + \nabla p &= \mathbf{f} \quad \text{in } \Omega, \\ \nabla \cdot \mathbf{u} &= 0 \quad \text{in } \Omega, \\ \mathbf{u} &= \mathbf{0} \quad \text{on } \partial\Omega. \end{aligned} \quad (2.56)$$

We choose energy spaces for the displacement-pressure pair $(\mathbf{u}, p)$ in the identical test and trial spaces as

$$\begin{aligned} \mathbb{V}_S &= \{\mathbf{v} \in (H^1(\Omega))^2 : \mathbf{v} = \mathbf{0} \quad \text{on } \partial\Omega\} = (H_0^1(\Omega))^2, \\ \mathbb{U}_S &= \{\mathbf{u} \in (H^1(\Omega))^2 : \mathbf{u} = \mathbf{0} \quad \text{on } \partial\Omega\} = \mathbb{V}_S, \\ \mathbb{W}_S &= \left\{ p \in L^2(\Omega) : \int_{\Omega} p \, d\mathbf{x} = 0 \right\} = L^2(\Omega)/\mathbb{R}. \end{aligned} \quad (2.57)$$

We consider the standard mixed variational form as

Find $\mathbf{u} \in \mathbb{U}_S$ and $p \in \mathbb{W}_S$ such that

$$\begin{aligned} (\nabla \mathbf{u}, \nabla \mathbf{v}) - (p, \nabla \cdot \mathbf{v}) &= (\mathbf{f}, \mathbf{v}), \quad \forall \mathbf{v} \in \mathbb{V}_S, \\ (\nabla \cdot \mathbf{u}, \omega) &= 0, \quad \forall \omega \in \mathbb{W}_S. \end{aligned} \tag{2.58}$$

We introduce two finite-dimensional subspaces $\mathbb{V}_{S,h} \subset \mathbb{V}$ and $\mathbb{W}_{S,h} \subset \mathbb{W}$, and consider the discretized problem:

Find $(\mathbf{u}_h, p_h) \in \mathbb{V}_{S,h} \times \mathbb{W}_{S,h}$ such that

$$\begin{aligned} (\nabla \mathbf{u}_h, \nabla \mathbf{v}_h) - (p_h, \nabla \cdot \mathbf{v}_h) &= (\mathbf{f}, \mathbf{v}_h), \quad \forall \mathbf{v}_h \in \mathbb{V}_{S,h}, \\ (\nabla \cdot \mathbf{u}_h, \omega_h) &= 0, \quad \forall \omega_h \in \mathbb{W}_{S,h}. \end{aligned} \tag{2.59}$$

Now we construct a pair of discretized space $\mathbb{V}_{S,h} \times \mathbb{W}_{S,h}$ for this Stokes model problem in the next subsection.

2.4.5 Modified Bernardi-Raugel Element

Stable mixed finite element pairs for the Stokes problem have been widely and thoroughly studied on triangles and rectangles. One notable construction on rectangles was discussed in Bernardi and Raugel (1985) and Fortin (1981), where polynomial spaces are supplemented with bubble functions. Consider the standard type of Bernardi-Raugel (BR) element using the space of tensor product polynomials

$$(\mathbb{Q}_{1,1}(E))^2 \oplus \text{span}\{\mathbf{b}_0, \mathbf{b}_1, \mathbf{b}_2, \mathbf{b}_3\} \subset (\mathbb{Q}_{2,2}(E))^2, \tag{2.60}$$

where $\mathbf{b}_i$ is a quadratic bubble function defined for each edge e_i . A similar but more general type of element was discussed by Arbogast and Wheeler (2005).

We now modify the original BR element to extend it to a new finite element suited to quadrilaterals using the direct serendipity space as

$$\mathbb{V}_1^{\mathcal{BR}}(E) = (\mathcal{DS}_1(E))^2 \oplus \text{span}\{\mathbf{b}_0, \mathbf{b}_1, \mathbf{b}_2, \mathbf{b}_3\} \subset (\mathcal{DS}_2(E))^2, \tag{2.61}$$

where $\dim \mathbb{V}_1^{\mathcal{BR}}(E) = 12$. One natural choice for the supplemental bubble function $\mathbf{b}_i$ is the previously defined edge nodal basis function $\varphi_{e,i}^{(2)} \in \mathcal{DS}_2$ times the unit normal, i.e.,

$$\mathbf{b}_i(\mathbf{x}) = \varphi_{e,i}^{(2)}(\mathbf{x})\boldsymbol{\nu}_i, \quad (2.62)$$

which is quadratic when restricted to edge e_i according to (2.21). The quadratic bubble is guaranteed to be conforming since it evaluates to 0 on two vertices and 1 at the middle point of the edge due to normalization, which is uniquely determined by these three points. The integral of this quadratic bubble can be accurately computed by a three-point Gaussian quadrature rule.

We state the degrees of freedom of this type of element as follows.

Definition 2.5. For an element $E \in \mathcal{T}_h$, $\mathbf{u}_h$ is uniquely defined by the following 12 degrees of freedom:

- (i) for corner point v_i and Cartesian direction unit normal vectors $\{\mathbf{i}, \mathbf{j}\}$,

$$DOF_{(v_i, \mathbf{i})}^{(i)}(\mathbf{u}_h) = \mathbf{u}_h(v_i) \cdot \mathbf{i}, \quad DOF_{(v_i, \mathbf{j})}^{(i)}(\mathbf{u}_h) = \mathbf{u}_h(v_i) \cdot \mathbf{j};$$

- (ii) for edge e_i ,

$$DOF_{e_i}^{(ii)} = \langle \mathbf{u}_h \cdot \boldsymbol{\nu}_i, 1 \rangle.$$

We give an explicit construction of the shape functions. We choose the nodal basis function on vertex v_i in two Cartesian directions as

$$N_{v_i, x} = \begin{bmatrix} \varphi_{v,i}^{(1)}(\mathbf{x}) \\ 0 \end{bmatrix}, \quad N_{v_i, y} = \begin{bmatrix} 0 \\ \varphi_{v,i}^{(1)}(\mathbf{x}) \end{bmatrix}, \quad (2.63)$$

where $\varphi_{v,i}^{(1)}$ is the vertex nodal shape function in $\mathcal{DS}_1(E)$. We choose the edge basis function on edge e_i as (2.62), i.e.,

$$N_{e,i} = \mathbf{b}_i(\mathbf{x}) = \varphi_{e,i}^{(2)}\boldsymbol{\nu}_i \quad (2.64)$$

Note that bubble functions are quadratic when restricted to edge e_i , while nodal basis functions are linear when restricted to edge e_i . Therefore the bubble functions cannot

be in the same space as the nodal basis functions. We conclude that this element is well-defined, i.e., the degrees of freedom uniquely determine the function.

We pair it with the space

$$\mathbb{W}_0 = \{\omega \in L^2(\Omega); \quad \omega|_E \in P_0\}/\mathbb{R}, \quad (2.65)$$

which has piecewise constant values for each element E . We provide stability and approximation analysis for this space pair $\mathbb{V}_1^{\text{BR}} \times \mathbb{W}_0$ in the next subsection.

2.4.6 Stability and Approximation Properties for $\mathbb{V}_1^{\text{BR}} \times \mathbb{W}_0$

Before analyzing the stability and approximation properties for the new modified BR element, we state one useful lemma.

Lemma 2.6. *Let E be a nondegenerate convex quadrilateral element that is shape regular as in Definition 2.1. For each integer $m \geq 0$ and real number $p \in [1, \infty]$ there exist positive constants C_1 and C_2 , possibly depending on σ^* but otherwise independent of the geometry of E , such that the following upper bounds hold for all $v \in W_p^m(E)$:*

$$\begin{cases} |v|_{W_p^0(E)} \leq C_1 h_E^{2/p} |\tilde{v}|_{W_p^0(\tilde{E})}, \\ |v|_{W_p^1(E)} \leq C_2(\sigma^*, p) h_E^{2/p-1} |\tilde{v}|_{W_p^1(\tilde{E})}, \end{cases} \quad (2.66)$$

where $\tilde{E}$ represents the local reference quadrilateral element $\tilde{E}$ illustrated in Figure 2.1, and $\tilde{v}$ is the function defined on the local reference element $\tilde{E}$.

Proof. See Girault and Raviart (2011). □

We reuse the interpolation operator $\mathcal{J}_h^1$ defined in equation (2.29). Define the projection operator $\pi \in (H_0^1(\Omega))^2 \rightarrow \mathbb{V}_1^{\text{BR}} \cap (H_0^1(\Omega))^2$ as a combination of local projection operators π_E as:

- (i) For each vertex $v \in \partial E$

$$\pi_E \mathbf{v}(\mathbf{x}_v) = \mathcal{J}_h^1 \mathbf{v}(\mathbf{x}_v); \quad (2.67)$$

(ii) For each edge $e \subset \partial E$,

$$\int_e (\pi_E \mathbf{v} - \mathbf{v}) \cdot \boldsymbol{\nu} ds = 0. \quad (2.68)$$

Lemma 2.7. *For all $\mathbf{v} \in (H^k(\Omega))^2 \cap (H_0^1(\Omega))^2$, $k = 1, 2$, the operator π_E defined by (2.67)–(2.68) satisfies*

$$(q_h, \nabla \cdot (\mathbf{v} - \pi_E \mathbf{v})) = 0, \quad \forall q_h \in \mathbb{W}_0 \quad (2.69)$$

Assuming shape regularity as defined in Definition 2.1, the global projection operator π satisfies the error bound

$$\|\mathbf{v} - \pi \mathbf{v}\|_{H^1(\Omega)} \leq Ch^m \|\mathbf{v}\|_{H^{m+1}(\Omega)}, \quad \forall \mathbf{v} \in (H^{m+1}(\Omega))^2, \quad m = 0, 1. \quad (2.70)$$

Proof. According to the divergence theorem, we have

$$\int_E \nabla \cdot (\mathbf{v} - \pi_E \mathbf{v}) d\mathbf{x} = \sum_{i=0}^3 \int_{e_i} (\mathbf{v} - \pi_E \mathbf{v}) \cdot \boldsymbol{\nu} ds = 0. \quad (2.71)$$

Given that q_h is piecewise constant on the element E , it is clear that we have

$$(q_h, \nabla \cdot (\mathbf{v} - \pi_E \mathbf{v})) = 0, \quad \forall q_h \in \mathbb{W}_0. \quad (2.72)$$

From the definition of the degrees of freedom (2.67) and (2.68), we decompose the projection operator π_E as

$$\pi_E \mathbf{v} = \mathcal{J}_h^1 \mathbf{v} + \sum_{i=0}^3 \alpha_i \mathbf{b}_i, \quad (2.73)$$

where the coefficient

$$\alpha_i = \frac{\int_{e_i} (\mathbf{v} - \mathcal{J}_h^1 \mathbf{v}) \cdot \boldsymbol{\nu}_i ds}{\int_{e_i} \mathbf{b}_i \cdot \boldsymbol{\nu}_i ds}. \quad (2.74)$$

The approximation property of the interpolation operator $\mathcal{J}_h^1$ has been discussed in Lemma 2.4,

$$\|\mathbf{v} - \mathcal{J}_h^1 \mathbf{v}\|_{H^m(E)} \leq h^{n-m} |\mathbf{v}|_{H^n(E^*)}, \quad m = 0, 1, \quad n = 1, 2. \quad (2.75)$$

where $E^* = \cup_{F \in \mathcal{T}_h, F \cap E \neq \emptyset}$ defined in Lemma 2.3.

Lemma 2.6 indicates an estimation of the bubble function as

$$|\mathbf{b}_i|_{H^m(E)} \leq C(\sigma^*) h^{1-m} |\tilde{\mathbf{b}}_i|_{H^1(\tilde{E})}, \quad m = 0, 1. \quad (2.76)$$

Because of the shape regularity, the vertices of the local reference elements $\tilde{E}$ vary in a compact set. Moreover, as in Arbogast et al. (2022), the definition of $\tilde{\mathbf{b}}_i$ depends only on the vertices in a C^1 manner. Thus the maximum over the elements is finite, and so

$$|\tilde{\mathbf{b}}_i|_{H^1(\tilde{E})} \leq C(\sigma^*), \quad \forall E \in \mathcal{T}_h. \quad (2.77)$$

Therefore

$$|\tilde{\mathbf{b}}_i|_{H^m(E)} \leq C(\sigma^*) h^{1-m}, \quad m = 0, 1. \quad (2.78)$$

We continue to estimate $|\alpha_i|$. Note

$$\int_{e,i} \mathbf{b}_i \cdot \boldsymbol{\nu}_i ds = \int_{e,i} \varphi_{e,i}^{(2)} ds = |e_i| \int_{\tilde{e}_i} \tilde{\varphi}_{e,i}^{(2)} d\tilde{s} = C_1 |e_i|. \quad (2.79)$$

Then

$$\begin{aligned} |\alpha_i| &= \left| \frac{\int_{e_i} (\mathbf{v} - \mathcal{J}_h^1 \mathbf{v}) \cdot \boldsymbol{\nu}_i ds}{\int_{e_i} \mathbf{b}_i \cdot \boldsymbol{\nu}_i ds} \right| \leq C \int_{\tilde{e}_i} |\tilde{\mathbf{v}} - \tilde{\mathcal{J}}_h^1 \tilde{\mathbf{v}}| d\tilde{s} \\ &\leq C \left\| \tilde{\mathbf{v}} - \tilde{\mathcal{J}}_h^1 \tilde{\mathbf{v}} \right\|_{L^2(\tilde{e}_i)}. \end{aligned} \quad (2.80)$$

As the trace mapping is continuous from $H^1(\tilde{E})$ into $L^2(\tilde{e})$, according to the Trace Theorem 2.1,

$$\begin{aligned} |\alpha_i| &\leq C \left\| \tilde{\mathbf{v}} - \tilde{\mathcal{J}}_h^1 \tilde{\mathbf{v}} \right\|_{H^1(\tilde{E})} \\ &\leq C \left(\left\| \tilde{\mathbf{v}} - \tilde{\mathcal{J}}_h^1 \tilde{\mathbf{v}} \right\|_{L^2(E)} + h^{-1} \left\| \tilde{\mathbf{v}} - \tilde{\mathcal{J}}_h^1 \tilde{\mathbf{v}} \right\|_{H^1(E)} \right). \end{aligned} \quad (2.81)$$

According to Lemma 2.4,

$$|\alpha_i| \leq C h^{k-1} \|\mathbf{v}\|_{H^k(E^*)}, \quad k = 1, 2. \quad (2.82)$$

The overall estimate is then

$$|\alpha_i| |\mathbf{b}_i|_{H^m(E)} \leq C h^{k-m} \|\mathbf{v}\|_{H^k(E^*)}, \quad m = 0, 1, \quad k = 1, 2. \quad (2.83)$$

Combining with the interpolation error estimate result in equation (2.75), we get a local error estimate as

$$\|\mathbf{v} - \pi_E \mathbf{v}\|_{H^1(E)} \leq Ch \|\mathbf{v}\|_{H^2(E)}. \quad (2.84)$$

The global error estimate is obtained by combining local results together. $\square$

In addition to the approximability lemma 2.4, we also need a stability result.

Lemma 2.8. *Assuming that $\mathbf{v} \in (H^1(\Omega))^2$, the linear operator π is bounded on $(H^1(\Omega))^2$ independently of h , i.e.,*

$$\|\pi \mathbf{v}\|_{H^1(\Omega)} \leq C \|\mathbf{v}\|_{H^1(\Omega)}. \quad (2.85)$$

Proof. According to the triangle inequality,

$$\|\pi_E \mathbf{v}\|_{H^1(E)} \leq \|\mathbf{v}\|_{H^1(E)} + \|\mathbf{v} - \pi_E \mathbf{v}\|_{H^1(E)} \leq (1 + C) \|\mathbf{v}\|_{H^1(E)}, \quad (2.86)$$

where C comes from Lemma 2.7. The global stability result can be obtained by combining local results. $\square$

Theorem 2.9. *With the established approximability result stated in Lemma 2.7, and the stability result stated in Lemma 2.8, for a convex domain Ω , there exists a constant $\gamma > 0$ such that*

$$\inf_{q_h \in \mathbb{W}_0} \sup_{\mathbf{v}_h \in \mathbb{V}_1^{\mathcal{B}\mathcal{R}}} \frac{(\nabla \cdot \mathbf{v}_h, q_h)}{\|\mathbf{v}_h\|_{H^1(\Omega)} \|q_h\|_{L^2(\Omega)}} \geq \gamma > 0. \quad (2.87)$$

Proof. Note that

$$\sup_{\mathbf{v}_h \in \mathbb{V}_1^{\mathcal{B}\mathcal{R}}} \frac{(\nabla \cdot \mathbf{v}_h, q_h)}{\|\mathbf{v}_h\|_{H^1(\Omega)} \|q_h\|_{L^2(\Omega)}} \geq \frac{(\nabla \cdot \pi \mathbf{v}, q_h)}{\|\pi \mathbf{v}\|_{H^1(\Omega)} \|q_h\|_{L^2(\Omega)}}. \quad (2.88)$$

Recall that the inf-sup condition holds for the continuous space as

$$\inf_{q \in L^2(\Omega)} \sup_{\mathbf{v} \in (H^1(\Omega))^2} \frac{(\nabla \cdot \mathbf{v}, q)}{\|\mathbf{v}\|_{H^1(\Omega)} \|q\|_{L^2(\Omega)}} \geq \gamma > 0. \quad (2.89)$$

With the condition $(q_h, \nabla \cdot (\mathbf{v} - \pi_E \mathbf{v})) = 0$ proved in Lemma 2.7 we have

$$\frac{(\nabla \cdot \pi \mathbf{v}, q_h)}{\|\pi \mathbf{v}\|_{H^1(\Omega)} \|q_h\|_{L^2(\Omega)}} = \frac{(\nabla \cdot \mathbf{v}, q_h)}{\|\pi \mathbf{v}\|_{H^1(\Omega)} \|q_h\|_{L^2(\Omega)}} \geq \frac{\gamma}{C} > 0, \quad (2.90)$$

where C here is the constant in (2.85). $\square$

We conclude that our space $\mathbb{V}_1^{\mathcal{BR}} \times \mathbb{W}_0$ forms a inf-sup stable pair with first order overall accuracy.

2.4.7 Numerical Test

We test our modified Bernardi-Raugel elements on the incompressible isotropic elasticity problem but with a non-homogenous Dirichlet boundary condition, i.e., on the problem:

Find the displacement $\mathbf{u}$ and pressure p such that

$$\begin{aligned} -\Delta \mathbf{u} + \nabla p &= \mathbf{f} \quad \text{in } \Omega, \\ \nabla \cdot \mathbf{u} &= 0 \quad \text{in } \Omega, \\ \mathbf{u} &= \mathbf{g} \quad \text{on } \partial\Omega. \end{aligned} \quad (2.91)$$

We assume that $\mathbf{g} \in (H^{1/2}(\partial\Omega))^2$ and understand $\tilde{\mathbf{g}} \in (H^1(\Omega))^2$ as a continuous extension from the boundary into the domain. We define a simple choice of energy spaces

$$\begin{aligned} \mathbb{V} &= \{\mathbf{v} \in (H^1(\Omega))^2 : \mathbf{v} = \mathbf{0} \quad \text{on } \partial\Omega\}, \\ \mathbb{U} &= \{\mathbf{u} \in (H^1(\Omega))^2 : \mathbf{u} = \mathbf{g} \quad \text{on } \partial\Omega\} = \tilde{\mathbf{g}} + \mathbb{V}, \\ \mathbb{W} &= \{p \in L^2(\Omega)\} / \mathbb{R}. \end{aligned} \quad (2.92)$$

We write the problem in weak form as:


Find $\mathbf{u} \in \mathbb{U}$ and $p \in L^2(\Omega)$ such that

$$\begin{aligned} (\nabla \mathbf{u}, \nabla \mathbf{v}) - (p, \nabla \cdot \mathbf{v}) &= (\mathbf{f}, \mathbf{v}), \quad \forall \mathbf{v} \in \mathbb{V}, \\ (\nabla \cdot \mathbf{u}, \omega) &= 0, \quad \forall \omega \in \mathbb{W}. \end{aligned} \quad (2.93)$$

We consider the true solution of test problem (2.93) defined on a square region $\Omega = [0, \pi] \times [0, 2\pi]$. We manufacture a displacement and pressure as

$$\mathbf{u} = \begin{bmatrix} \cos(x) \sin(y) \\ -\sin(x) \cos(y) \end{bmatrix}, \quad p = \sin(x) \sin(y), \quad (2.94)$$

which has 0 normal flux on the boundary. We deal with the constant kernel by enforcing $\int_{\Omega} p \, d\mathbf{x} = 0$ and solve the linear system directly. The numerical results are computed on rectangular and logically rectangular quadrilateral meshes as depicted in Figures 2.10a and 2.10b, respectively. We calculate the L^2 norm of the residual (i.e., the difference) of the true and approximate pressure, velocity, and derivative of velocity.

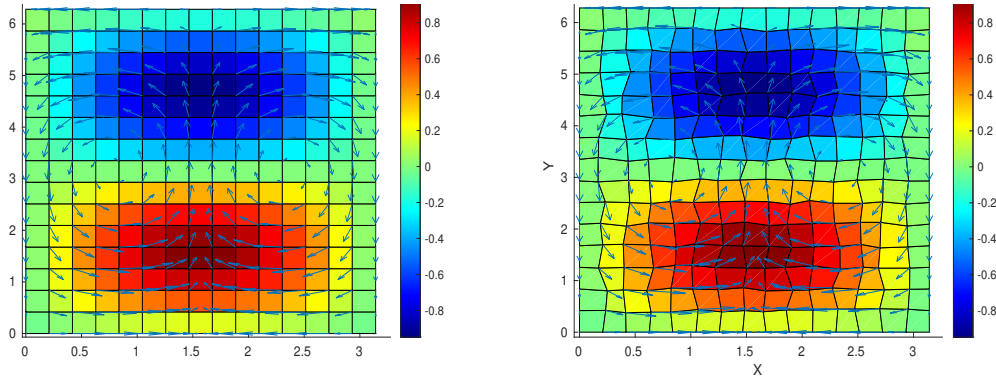

(a) Rectangular Grids. Shown are pressure (color) and velocity (arrows). (b) Distorted Grids. Shown are pressure (color) and velocity (arrows).

Figure 2.10: Numerical results on rectangular and quadrilateral mesh.

In Table 2.1 and Table 2.2 we display the result of a calculation of convergence on $n \times n$ rectangular and distorted grids, respectively, for $n = 8, 16, 32, 64$. A second order convergence rate is achieved by velocity. Pressure achieves some super-convergence due to the use of the mid point integration rule. We see second order convergence on the rectangular grid, and some rate better than the first on distorted grid. A first order convergence rate is achieved by derivative of velocity. These meet our expectations for optimal convergence order.

Grid size	8×8	16×16	32×32	64×64
$L^2(\text{res}_u)$	4.502E-1	1.052E-1	2.513E-2	6.130E-3
$L^2(\text{res}_{du})$	1.039E+0	4.463E-1	2.093E-1	1.019E-1
$L^2(\text{res}_p)$	2.632E+0	5.845E-1	1.374E-1	3.330E-2

Table 2.1: Rectangular Grids. L^2 -error in the residual of the solution u (res_u), the pressure p (res_p), and the of derivatives of the solution Du (res_{du}).

Grid size	8×8	16×16	32×32	64×64
$L^2(\text{res}_u)$	4.603E-1	1.074E-2	2.567E-2	6.266E-3
$L^2(\text{res}_{du})$	1.070E+0	4.670E-1	2.207E-1	1.078E-1
$L^2(\text{res}_p)$	2.685E+0	5.981E-1	1.525E-1	4.580E-2

Table 2.2: Distorted Grids. L^2 -error in the residual of the solution u (res_u), the pressure p (res_p), and the of derivatives of the solution Du (res_{du}).

2.5 Coupled Degenerate Darcy-Stokes System

We consider a degenerate Darcy-Stokes coupled boundary-value problem in the dimensionless form:

Find two velocity-pressure potential pairs $(\check{\mathbf{v}}_r, \check{q}_l)$ and $(\check{\mathbf{v}}_s, \check{q})$ such that

$$\check{\mathbf{v}}_r + \phi^{1+\Theta} \nabla(\phi^{-1/2} \check{q}_l) = 0, \quad (2.95)$$

$$\phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{v}}_r) + \frac{1}{1-\phi} (\check{q}_l - \phi^{1/2} \check{q}) = 0, \quad (2.96)$$

$$\nabla \check{q} - \nabla \cdot \check{\boldsymbol{\tau}}(\check{\mathbf{v}}_s) = -(1-\phi) \mathbf{n}, \quad (2.97)$$

$$\nabla \cdot \check{\mathbf{v}}_s - \frac{\phi^{1/2}}{1-\phi} (\check{q}_l - \phi^{1/2} \check{q}) = 0, \quad (2.98)$$

and

$$\begin{aligned} \phi^{1+\Theta} \check{\mathbf{v}}_r \cdot \boldsymbol{\nu} &= g_r && \text{on } \Gamma_{u,D}, \\ \check{\mathbf{v}}_s &= \mathbf{g}_s && \text{on } \Gamma_{u,S}, \\ \check{q}_l &= \phi^{1/2} q_{l,0} && \text{on } \Gamma_{i,D}, \\ \boldsymbol{\tau} \cdot \boldsymbol{\nu} - q &= t_0 && \text{on } \Gamma_{i,S}. \end{aligned} \quad (2.99)$$

Here, $\Gamma_{u,D}$ and $\Gamma_{u,S}$ denote the parts of the boundary, where essential boundary conditions are prescribed for the Darcy and the Stokes problems, respectively, while $\Gamma_{i,D}$ and $\Gamma_{i,S}$ represent the portions of the boundary, where natural boundary conditions

are imposed. We assume the essential and natural boundary conditions are non overlapping and covering the entire boundary, i.e., $\Gamma_{u,D} \cup \Gamma_{i,D} = \partial\Omega$, $\Gamma_{u,D} \cap \Gamma_{i,D} = \emptyset$ and $\Gamma_{u,S} \cup \Gamma_{i,S} = \partial\Omega$, $\Gamma_{u,S} \cap \Gamma_{i,S} = \emptyset$.

To ensure well-posedness in the presence of degeneracy ($\phi = 0$), we must verify that all terms scaled by $\phi^{-1/2}$ remain well-defined. We expand the gradient term in equation (2.95) and the divergence term in equation (2.96) as

$$\begin{aligned}\phi^{1+\Theta}\nabla(\phi^{-1/2}\check{q}_l) &= \phi^{1/2+\Theta}\nabla\check{q}_l + \phi^{\Theta-1/2}\check{q}_l\nabla\phi, \\ \phi^{-1/2}\nabla \cdot (\phi^{1+\Theta}\check{\mathbf{v}}_r) &= \phi^{1/2+\Theta}\nabla \cdot \check{\mathbf{v}}_r + \phi^{\Theta-1/2}\nabla\phi \cdot \check{\mathbf{v}}_r.\end{aligned}\tag{2.100}$$

They are well-defined provided that

$$\phi^{\Theta-1/2}\nabla\phi \in (L^\infty(\Omega))^2.\tag{2.101}$$

We define a scaled Hilbert space tailored to the present formulation, within which the scaled velocity $\check{\mathbf{v}}_r$ should lie

Definition 2.6. Let

$$H_\phi(\text{div}; \Omega) = \left\{ \mathbf{v} \in (L^2(\Omega))^2 : \phi^{-1/2}\nabla \cdot (\phi^{1+\Theta}\mathbf{v}) \in L^2(\Omega) \right\}.\tag{2.102}$$

This is a Hilbert space equipped with the inner product

$$(\mathbf{u}, \mathbf{v})_{H_\phi(\text{div}; \Omega)} = (\mathbf{u}, \mathbf{v}) + (\phi^{-1/2}\nabla \cdot (\phi^{1+\Theta}\mathbf{u}), \phi^{-1/2}\nabla \cdot (\phi^{1+\Theta}\mathbf{v})).\tag{2.103}$$

The normal trace on $\partial\Omega$ is well-defined by

$$\langle \phi^{1/2+\Theta}\mathbf{v} \cdot \boldsymbol{\nu}, \psi \rangle = (\mathbf{v}, \phi^{1+\Theta}\nabla(\phi^{-1/2}\psi)) + (\phi^{-1/2}\nabla \cdot (\phi^{1+\Theta}\mathbf{v}), \psi), \quad \forall \psi \in H^1(\Omega),\tag{2.104}$$

using (2.101), moreover,

$$\|\phi^{1/2+\Theta}\mathbf{v} \cdot \boldsymbol{\nu}\|_{H^{-1/2}(\partial\Omega)} < C_\Omega \left\{ \|\mathbf{v}\|_{L^2(\Omega)} + \|\phi^{-1/2}\nabla \cdot (\phi^{1+\Theta}\mathbf{v})\|_{L^2(\Omega)} \right\}.\tag{2.105}$$

Subsequently, we have the space $H_\phi^{-1/2}(\text{div}; \partial\Omega)$ understood as the image of the normal trace operator on $H_\phi(\text{div}; \Omega)$.

2.5.1 The Weak Formulation

We assume that the Dirichlet data $\mathbf{g}_s \in (H^{1/2}(\Gamma_{u,S}))^2$, and understand $\tilde{\mathbf{g}}_s \in (H^1(\Omega))^2$ as a continuous extension from the boundary into the domain. Similarly, we assume that $\phi^{-1/2}g_r \in H_\phi^{-1/2}(\partial\Omega)$ understood as the image of the scaled normal trace operator (2.104). Let

$$\phi^{1/2+\Theta}\mathbf{g}_r \cdot \boldsymbol{\nu} = \phi^{-1/2}g_r \quad \text{on } \partial\Omega. \quad (2.106)$$

We view $\tilde{\mathbf{g}}_r$ as a continuous extension from the boundary into the domain.

The following energy spaces are defined for this scaled Darcy-Stokes coupled system

$$\begin{aligned} \mathbb{V}_D^\phi &= \left\{ \mathbf{v} \in H_\phi(\text{div}; \Omega) : \phi^{1/2+\Theta}\mathbf{v} \cdot \boldsymbol{\nu} = 0 \text{ on } \Gamma_{u,D} \right\}, \\ \mathbb{U}_D^\phi &= \left\{ \mathbf{u} \in H_\phi(\text{div}; \Omega) : \phi^{1/2+\Theta}\mathbf{u} \cdot \boldsymbol{\nu} = \phi^{-1/2}g_r \text{ on } \Gamma_{u,D} \right\} = \tilde{\mathbf{g}}_r + \mathbb{V}_D^\phi, \\ \mathbb{W}_D &= L^2(\Omega), \\ \mathbb{V}_S &= \left\{ \mathbf{v} \in (H^1(\Omega))^2 : \mathbf{v} = \mathbf{0} \text{ on } \Gamma_{u,S} \right\}, \\ \mathbb{U}_S &= \left\{ \mathbf{u} \in (H^1(\Omega))^2 : \mathbf{u} = \mathbf{g}_s \text{ on } \Gamma_{u,S} \right\} = \tilde{\mathbf{g}}_s + \mathbb{V}_S, \\ \mathbb{W}_S &= L^2(\Omega), \end{aligned} \quad (2.107)$$

where each space is equipped with its natural norm.

A compatibility condition is required to ensure overall mass conservation when essential boundary conditions are prescribed on the entire boundary $\partial\Omega$, i.e., when $\Gamma_{u,D} = \Gamma_{u,S} = \partial\Omega$. In this case, the prescribed Dirichlet data must satisfy the compatibility condition

$$\int_{\partial\Omega} (\phi^{1+\Theta}\mathbf{g}_r + \mathbf{g}_s) \cdot \boldsymbol{\nu} \, ds = 0. \quad (2.108)$$

The standard mixed form for the proposed coupled system reads as follows:

Find $\check{\mathbf{v}}_r \in \mathbb{U}_D^\phi$, $\check{q}_l \in \mathbb{W}_D$, $\check{\mathbf{v}}_s \in \mathbb{U}_S$, and $\check{q} \in \mathbb{W}_S$ such that

$$(\check{\boldsymbol{\tau}}(\mathbf{v}_s), \nabla \boldsymbol{\psi}_s) - (\check{q}, \nabla \cdot \boldsymbol{\psi}_s) = -((1 - \phi)\mathbf{n}, \boldsymbol{\psi}_s) \quad \forall \boldsymbol{\psi}_s \in \mathbb{V}_S, \quad (2.109)$$

$$(\nabla \cdot \check{\mathbf{v}}_s, \omega) + \left(\frac{\phi^{1/2}}{1 - \phi} (\check{q}_l - \phi^{1/2} \check{q}), \omega \right) = 0 \quad \forall \omega \in \mathbb{W}_S, \quad (2.110)$$

$$(\check{\mathbf{v}}_r, \boldsymbol{\psi}_r) - (\check{q}_l, \phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \boldsymbol{\psi}_r)) = 0, \quad \forall \boldsymbol{\psi}_r \in \mathbb{V}_D^\phi, \quad (2.111)$$

$$(\phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{v}}_r), \omega_l) + \left(\frac{1}{1 - \phi} (\check{q}_l - \phi^{1/2} \check{q}), \omega_l \right) = 0 \quad \forall \omega_f \in \mathbb{W}_D. \quad (2.112)$$

We state the well-posedness result of the scaled formulation directly as follows.

Lemma 2.10. (*Existence and Uniqueness*)

Assume the condition (2.101) holds, $0 \leq \phi \leq \phi^* < 1$. There exists a unique solution to the scaled formulation (2.109)–(2.112), and it satisfies

$$\begin{aligned} \|\check{\mathbf{v}}_r\|_{(L^2(\Omega))^2} + \|\phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{v}}_r)\|_{(L^2(\Omega))^2} + \|\check{q}_l\|_{(L^2(\Omega))^2} + \|\check{\mathbf{v}}_s\|_{(H^1(\Omega))^2} + \|\check{q}\|_{(L^2(\Omega))^2} \\ \leq C \{ |\rho_r| + \|\check{\mathbf{g}}_r\|_{(L^2(\Omega))^2} + \|\phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{g}}_r)\|_{(L^2(\Omega))^2} + \|\check{\mathbf{g}}_s\|_{H^1(\Omega)} \}. \end{aligned} \quad (2.113)$$

Proof. See Arbogast et al. (2017). □

2.5.2 A Scaled Mixed Finite Element Method

We discretize the scaled mixed formulation using two pairs of finite element spaces: $\mathbb{V}_{D,h} \times \mathbb{W}_{D,h} \subset H(\text{div}; \Omega) \times L^2(\Omega)$ for the Darcy part of the system and $\mathbb{V}_{S,h} \times \mathbb{W}_{S,h} \subset (H^1(\Omega))^2 \times L^2(\Omega)$ for the Stokes part of the system. We recall the aforementioned inf-sup stable mixed finite element space pairs on each element $E \in \mathcal{T}_h$:

- Reduced $H(\text{div})$ conforming space $\mathbb{V}_1^0$ in Section 2.4.2,

$$\begin{aligned} \mathbb{V}_{D,h}(E) &= \mathbb{V}_1^0(E) = (\mathbb{P}_1(E))^2 \oplus \text{curl } \mathbb{S}_2^{\mathcal{DS}}(E), \\ \mathbb{W}_{D,h}(E) &= \mathbb{W}(E) = \mathbb{P}_0(E); \end{aligned} \quad (2.114)$$

- Modified Bernardi-Raugel element in Section 2.4.5,

$$\begin{aligned}\mathbb{V}_{S,h}(E) &= \mathbb{V}_1^{\mathcal{BR}}(E) = (\mathcal{DS}_1(E))^2 \oplus \text{span}\{\mathbf{b}_0, \mathbf{b}_1, \mathbf{b}_2, \mathbf{b}_3\}, \\ \mathbb{W}_{S,h}(E) &= \mathbb{W}(E) = \mathbb{P}_0(E).\end{aligned}\tag{2.115}$$

We impose essential boundary conditions by projecting extensions $\tilde{\mathbf{g}}_r$ and $\tilde{\mathbf{g}}_s$ into the finite element spaces as $\hat{\mathbf{g}}_r \in \mathbb{V}_{D,h}$ and $\hat{\mathbf{g}}_s \in \mathbb{V}_{S,h}$.

We also define

$$\begin{aligned}\mathbb{V}_{D,h,0} &= \{\mathbf{v} \in \mathbb{V}_{D,h} : \mathbf{v} \cdot \boldsymbol{\nu} = 0 \text{ on } \Gamma_{u,D}\} \\ \mathbb{V}_{S,h,0} &= \{\mathbf{v} \in \mathbb{V}_{S,h} : \mathbf{v} = \mathbf{0} \text{ on } \Gamma_{u,S}\}\end{aligned}\tag{2.116}$$

The scaled mixed finite element method: Find $\check{\mathbf{v}}_{r,h} \in \mathbb{V}_{D,h,0} + \hat{\mathbf{g}}_r$, $\check{q}_{r,h} \in \mathbb{W}_{D,h}$, $\check{\mathbf{v}}_{s,h} \in \mathbb{V}_{S,h,0} + \hat{\mathbf{g}}_s$ and $\check{q}_h \in \mathbb{W}_{S,h}$ such that

$$(\boldsymbol{\tau}(\check{\mathbf{v}}_{s,h}), \nabla \boldsymbol{\psi}_{s,h}) - (\check{q}_h, \nabla \cdot \boldsymbol{\psi}_{s,h}) = -((1 - \phi)\mathbf{n}, \boldsymbol{\psi}_{s,h}), \quad \forall \boldsymbol{\psi}_{s,h} \in \mathbb{V}_{S,h,0}, \tag{2.117}$$

$$(\nabla \cdot \check{\mathbf{v}}_{s,h}, \omega_h) - \left(\frac{\phi^{1/2}}{1 - \phi} (\check{q}_{l,h} - \phi^{1/2} \check{q}_h), \omega_h \right) = 0, \quad \forall \omega_h \in \mathbb{W}_{S,h}, \tag{2.118}$$

$$(\check{\mathbf{v}}_{r,h}, \boldsymbol{\psi}_{r,h}) - (\check{q}_{l,h}, \phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \boldsymbol{\psi}_{r,h})) = 0, \quad \forall \boldsymbol{\psi}_{r,h} \in \mathbb{V}_{D,h,0}, \tag{2.119}$$

$$\begin{aligned}(\phi^{-1/2} \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{v}}_{r,h}), \omega_{l,h}) + \left(\frac{1}{1 - \phi} (\check{q}_{l,h} - \phi^{1/2} \check{q}_h), \omega_{l,h} \right) &= 0, \\ \forall \omega_{l,h} &\in \mathbb{W}_{D,h}.\end{aligned}\tag{2.120}$$

The existence and convergence results of the proposed new mixed finite element discretization can be established in complete analogy with the proof in Arbogast et al. (2017). We state the results below

Lemma 2.11. *If (2.101) holds, then there exists a unique solution to the scaled mixed finite element method (2.117)–(2.120).*

Proof. See Arbogast et al. (2017). □

Lemma 2.12. *Assume that (2.101) holds on the porosity, $0 \leq \phi \leq \phi^* < 1$, and the mesh is quasiuniform. Then the difference of the solution to the scaled formula-*

tion (2.117)–(2.120), and its finite element approximation satisfy

$$\begin{aligned}
& \|\tilde{\mathbf{v}}_r - \tilde{\mathbf{v}}_{r,h}\|_{L^2(\Omega)} + \|\mathcal{P}_{\mathbb{W}_{D,h}}[\phi^{-1/2}\nabla \cdot (\phi^{1+\Theta}(\tilde{\mathbf{v}}_r - \tilde{\mathbf{v}}_{r,h}))]\|_{L^2(\Omega)} + \|\mathbf{v}_s - \mathbf{v}_{s,h}\|_{H^1(\Omega)} \\
& + \|\tilde{q}_l - \tilde{q}_{l,h}\|_{L^2(\Omega)} + \|q - q_h\|_{L^2(\Omega)} \\
& \leq C \left\{ \|\tilde{\mathbf{v}}_r - \pi_{\mathbb{V}_1^0}\tilde{\mathbf{v}}_r\|_{L^2(\Omega)} + \|\mathcal{P}_{\mathbb{W}_{D,h}}[\phi^{-1/2}\nabla \cdot (\phi^{1+\Theta}(\tilde{\mathbf{v}}_r - \pi_{\mathbb{V}_1^0}\tilde{\mathbf{v}}_r))]\|_{L^2(\Omega)} \right. \\
& + \|\pi_{\mathbb{V}_1^0}\tilde{\mathbf{g}}_r - \hat{\mathbf{g}}_r\|_{L^2(\Omega)} + \|\tilde{q}_l - \mathcal{P}_{\mathbb{W}_{D,h}}\tilde{q}_l\|_{L^2(\Omega)} + \|q - \mathcal{P}_{\mathbb{W}_{S,h}}q\|_{L^2(\Omega)} \\
& \left. + \|\mathbf{v}_s - \pi_{\mathbb{V}_{\mathcal{B}\mathcal{R}}}\mathbf{v}_s\|_{H^1(\Omega)} + \|\pi_{\mathbb{V}_{\mathcal{B}\mathcal{R}}}\tilde{\mathbf{g}}_s - \hat{\mathbf{g}}_s\|_{H^1(\Omega)} \right\}, \tag{2.121}
\end{aligned}$$

where $\pi_{\mathbb{V}_1^0}$ and $\pi_{\mathbb{V}_{\mathcal{B}\mathcal{R}}}$ are projection operators defined in Section 2.4.3 and Section 2.4.6 respectively.

Proof. See Arbogast et al. (2017). □

2.5.3 Local Mass Conservation

Before proceeding, we ensure that the formulation is well-defined—specifically, that no division by zero occurs. The term $\phi^{-1/2}$ in the symmetric equations (2.119) and (2.120) causes trouble when there is no melting, i.e., $\phi = 0$. To address this, we utilize an element-averaged variable ϕ_E as

$$\phi_E = \frac{1}{|E|} \int_E \phi(\mathbf{x}) d\mathbf{x}, \tag{2.122}$$

where $|E|$ is the area of element E and $\phi_E = \mathcal{P}_{\mathbb{W}_{D,h}}\phi|_E \in \mathbb{W}_{D,h}$. Then the two terms involving divergence are modified as

$$\phi^{-1/2}\nabla \cdot (\phi^{1+\Theta}\mathbf{v})|_E = \begin{cases} \phi_E^{-1/2}\nabla \cdot (\phi^{1+\Theta}\mathbf{v}) & \text{if } \phi_E \neq 0, \\ 0 & \text{if } \phi_E = 0, \end{cases} \tag{2.123}$$

wherein the point-wise term $\phi^{-1/2}$ was modified to be a cell-averaged term $\phi_E^{-1/2}$. We apply the divergence theorem to expand the integral term involving the divergence operator in equation (2.120) as

$$\int_E \phi_E^{-1/2}\nabla \cdot (\phi^{1+\Theta}\boldsymbol{\psi}_{r,h})\omega_{l,h} d\mathbf{x} = \int_{\partial E} \phi_E^{-1/2}(\phi^{1+\Theta}\boldsymbol{\psi}_{r,h} \cdot \boldsymbol{\nu})\omega_{l,h} ds, \tag{2.124}$$

where $\omega_{l,h} \in \mathbb{W}_{D,h}$ is constant on the element $E \in \mathcal{T}_h$. We now propose our local mass conserved version with $\phi_E^{1/2}$ as

$$(\boldsymbol{\tau}(\check{\mathbf{v}}_{s,h}), \nabla \boldsymbol{\psi}_{s,h}) - (\check{q}_h, \nabla \cdot \boldsymbol{\psi}_{s,h}) = -((1 - \phi)\mathbf{n}, \boldsymbol{\psi}_{s,h}) \quad \forall \boldsymbol{\psi}_{s,h} \in \mathbb{V}_{S,h,0}, \quad (2.125)$$

$$(\nabla \cdot \check{\mathbf{v}}_{s,h}, \omega_h) - \left(\frac{\phi \phi_E^{-1/2}}{1 - \phi} (\check{q}_{l,h} - \phi_E^{1/2} \check{q}_h), \omega_h \right) = 0, \quad \forall \omega_h \in \mathbb{W}_{S,h}, \quad (2.126)$$

$$(\check{\mathbf{v}}_{r,h}, \boldsymbol{\psi}_{r,h}) - (\check{q}_{l,h}, \phi_E^{-1/2} \nabla \cdot (\phi^{1+\Theta} \boldsymbol{\psi}_{r,h})) = 0, \quad \forall \boldsymbol{\psi}_{r,h} \in \mathbb{V}_{D,h,0}, \quad (2.127)$$

$$(\phi_E^{-1/2} \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{v}}_{r,h}), \omega_{l,h}) + \left(\frac{\phi \phi_E^{-1}}{1 - \phi} (\check{q}_{l,h} - \phi_E^{1/2} \check{q}_h), \omega_{l,h} \right) = 0, \quad \forall \omega_{l,h} \in \mathbb{W}_{D,h}. \quad (2.128)$$

Here, the term $\phi \phi_E^{-1}$ in equation (2.128) is viewed as 1 when $\phi_E = 0$. We sum equations (2.126) and (2.128) together assuming that $\omega_h = \omega_E = 1 \in \mathbb{W}_{S,h}$ and $\omega_{l,h} = \phi_E^{-1/2} \omega_E \in \mathbb{W}_{D,h}$. To verify local mass conservation of the fluid, consider any element $E \in \mathcal{T}_h$. Equation (2.128) gives

$$\int_E \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{v}}_{r,h}) d\mathbf{x} + \int_E \frac{\phi \phi_E^{-1/2}}{1 - \phi} (\check{q}_{l,h} - \phi_E^{1/2} \check{q}_h) dx = 0, \quad (2.129)$$

and equation (2.126) gives

$$\int_E \nabla \cdot \check{\mathbf{v}}_{s,h} d\mathbf{x} - \int_E \frac{\phi \phi_E^{-1/2}}{1 - \phi} (\check{q}_{l,h} - \phi_E^{1/2} \check{q}_h) dx = 0. \quad (2.130)$$

The local mass conservation of the phase-averaged mixture is now retrieved as

$$\int_E \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{v}}_r + \check{\mathbf{v}}_s) d\mathbf{x} = 0. \quad (2.131)$$

Lemma 2.13. *Assuming (2.101) holds, there exists a unique solution to the modified local mass conservation modified scaled mixed finite element method (2.125)–(2.128).*

Proof. See Arbogast et al. (2017). The local mass conservation modification replaces the term $1/(1 - \phi)$ with $(\phi \phi_E^{-1})/(1 - \phi)$, which makes it completely analogous to the previous proof. Hence, we do not repeat it here. $\square$

2.6 Saddle Point System

Saddle point systems arise frequently in scientific and engineering applications, including constrained optimization problems, image reconstruction, and optimal control. Saddle point systems have been extensively and systematically studied, notably by Benzi et al. (2005). In our case, the saddle point system arises naturally from the mixed finite element discretization.

In this section, we give a brief overview of the properties of a saddle point system and present an iteration method tailored to our problem. We express the abstract saddle point system as

$$\begin{bmatrix} \mathbf{A} & \mathbf{B} \\ \mathbf{B}^T & -\mathbf{C} \end{bmatrix} \begin{bmatrix} \mathbf{x} \\ \mathbf{y} \end{bmatrix} = \begin{bmatrix} \mathbf{F} \\ \mathbf{G} \end{bmatrix}, \quad (2.132)$$

where we assume the following properties:

- $\mathbf{A}$ is symmetric: $\mathbf{A} = \mathbf{A}^T$;
- $\mathbf{A}$ is nonsingular: $\mathbf{A}^{-1}$ exists;
- $\mathbf{C}$ is symmetric and positive semidefinite;
- $\mathbf{B}$ is rank deficient.

2.6.1 Reduced System

We now present a detailed discussion of the saddle point system (SPS) arising from the mixed finite element method (MFEM) including the treatment of boundary conditions.

As a first step, we regroup the degrees of freedom (dofs) ($i \in I$) into three distinct sets: the set of the interior dofs I_c , the set of the boundary dofs assigned with essential boundary condition I_{Γ_u} and the set of the boundary dofs assigned with natural boundary condition I_{Γ_i} . We have $I_c \cap I_{\Gamma_u} = I_c \cap I_{\Gamma_i} = I_{\Gamma_u} \cap I_{\Gamma_i} = \emptyset$ and

$I_c \cup I_{\Gamma_i} \cup I_{\Gamma_u} = I$. We then reorganize the $\mathbf{A}$ matrix accordingly as

$$\mathbf{A} = \begin{bmatrix} \mathbf{A}_K & \mathbf{A}_M \\ \mathbf{A}_M^T & \mathbf{M} \end{bmatrix}, \quad (2.133)$$

where $\mathbf{A}_K = \{a_{k_1, k_2}\}$ with $k_1, k_2 \in I_c + I_{\Gamma_i}$, consists of all the “free” dofs. The matrix $\mathbf{A}_M = \{a_{m_1, m_2}\}$ with $m_1 \in I_c + I_{\Gamma_i}$, $m_2 \in I_{\Gamma_u}$, represents the interaction between “free” and prescribed dofs. Finally, $\mathbf{M} = \{m_{i,j}\}$, $i, j \in I_{\Gamma_u}$ accounts for the contributions from the fixed dofs associated with essential boundary conditions.

We apply the same treatment to the matrix $\mathbf{B}$ and the right-hand side vector $\mathbf{F}$ as

$$\mathbf{B} = \begin{bmatrix} \mathbf{B}_K \\ \mathbf{B}_M \end{bmatrix} \quad \text{and} \quad \mathbf{F} = \begin{bmatrix} \mathbf{F}_K \\ \mathbf{F}_M \end{bmatrix}. \quad (2.134)$$

We reformulate the linear system using the regrouped dofs and derive a reduced system of the form

$$\begin{bmatrix} \mathbf{A}_K & \mathbf{B}_K \\ \mathbf{B}_K^T & -\mathbf{C} \end{bmatrix} \begin{bmatrix} \mathbf{x} \\ \mathbf{y} \end{bmatrix} = \begin{bmatrix} \mathbf{F}_K - \mathbf{A}_M \mathbf{g} - \mathbf{g}_N \\ \mathbf{G} - \mathbf{B}_M^T \mathbf{g} \end{bmatrix}, \quad (2.135)$$

where $\mathbf{g}$ denotes the values prescribed by the essential boundary condition, and $\mathbf{g}_N$ represents the contribution from the natural boundary conditions. The reformed reduced system remains the structure of a saddle point system, and can be represented using the same abstract form (2.132).

2.6.2 Linear System for Coupled Darcy-Stokes Equations

The linear system formed from the equations (2.125)–(2.128) is shown as

$$\begin{bmatrix} \mathbf{A}_S & -\mathbf{B}_S & \mathbf{0} & \mathbf{0} \\ \mathbf{B}_S^T & \mathbf{C}_S & \mathbf{0} & \mathbf{K} \\ \mathbf{0} & \mathbf{0} & \mathbf{A}_D & -\mathbf{B}_D \\ \mathbf{0} & \mathbf{K} & \mathbf{B}_D^T & \mathbf{C}_D \end{bmatrix} \begin{bmatrix} \mathbf{x}_S \\ \mathbf{y}_S \\ \mathbf{x}_D \\ \mathbf{y}_D \end{bmatrix} = \begin{bmatrix} \mathbf{F}_S \\ \mathbf{G}_S \\ \mathbf{F}_D \\ \mathbf{G}_D \end{bmatrix}, \quad (2.136)$$

wherein all the matrices are reduced matrices excluding boundary dofs associated with essential boundary conditions, and all the right-hand side vectors are modified by boundary conditions. Most of these matrices can be computed directly from the

definition of the inner product over each element E . However, the $\mathbf{B}_D$ matrix should be computed using the divergence theorem (2.124) to avoid evaluating the derivatives of the porosity ϕ . For any element $E \in \mathcal{T}_h$,

$$\begin{aligned}\mathbf{B}_D &= (\phi_E^{-1/2} \nabla \cdot (\phi^{1+\Theta} \check{\mathbf{v}}_{r,h}), \omega_{l,h}) \\ &= \int_e (\phi_E^{-1/2} \phi^{1+\Theta}) \check{\mathbf{v}}_{r,h} \cdot \boldsymbol{\nu} \omega_{l,h} ds,\end{aligned}\tag{2.137}$$

where the term $\phi_E^{-1/2} \phi^{1+\Theta}$ is well-defined and evaluates 0 if $\phi_E = 0$.

We then form a double saddle point system by symmetrically permutating the original coupled linear system as

$$\begin{bmatrix} \mathbf{A}_S & \mathbf{0} & -\mathbf{B}_S & \mathbf{0} \\ \mathbf{0} & \mathbf{A}_D & \mathbf{0} & -\mathbf{B}_D \\ \mathbf{B}_S^T & \mathbf{0} & \mathbf{C}_S & \mathbf{K} \\ \mathbf{0} & \mathbf{B}_D^T & \mathbf{K} & \mathbf{C}_D \end{bmatrix} \begin{bmatrix} \mathbf{x}_S \\ \mathbf{x}_D \\ \mathbf{y}_S \\ \mathbf{y}_D \end{bmatrix} = \begin{bmatrix} \mathbf{F}_S \\ \mathbf{F}_D \\ \mathbf{G}_S \\ \mathbf{G}_D \end{bmatrix}.\tag{2.138}$$

We group these block matrices accordingly and retrieve the simple abstract saddle point system given in equation (2.132) with

$$\begin{aligned}\mathbf{A} &= \begin{bmatrix} \mathbf{A}_S & \mathbf{0} \\ \mathbf{0} & \mathbf{A}_D \end{bmatrix}, \quad \mathbf{B} = \begin{bmatrix} -\mathbf{B}_S & \mathbf{0} \\ \mathbf{0} & -\mathbf{B}_D \end{bmatrix}, \quad \mathbf{C} = \begin{bmatrix} \mathbf{C}_S & \mathbf{K} \\ \mathbf{K} & \mathbf{C}_D \end{bmatrix}, \\ \mathbf{F} &= \begin{bmatrix} \mathbf{F}_S \\ \mathbf{F}_D \end{bmatrix}, \quad \mathbf{G} = \begin{bmatrix} -\mathbf{G}_S \\ -\mathbf{G}_D \end{bmatrix}, \quad \mathbf{x} = \begin{bmatrix} \mathbf{x}_S \\ \mathbf{x}_D \end{bmatrix}, \quad \mathbf{y} = \begin{bmatrix} \mathbf{y}_S \\ \mathbf{y}_D \end{bmatrix}.\end{aligned}\tag{2.139}$$

We now examine the structure of the resulting saddle point system. The scaled formulation (2.111) guarantees that the matrix $\mathbf{A}_D$ is nonsingular, therefore the coupled matrix $\mathbf{A}$ is nonsingular. The saddle point system can be factored as

$$\begin{bmatrix} \mathbf{A} & \mathbf{B} \\ \mathbf{B}^T & \mathbf{C} \end{bmatrix} = \begin{bmatrix} I & \mathbf{0} \\ \mathbf{B}^T \mathbf{A}^{-1} & I \end{bmatrix} \begin{bmatrix} \mathbf{A} & \mathbf{0} \\ \mathbf{0} & \mathbf{S} \end{bmatrix} \begin{bmatrix} I & \mathbf{A}^{-1} \mathbf{B} \\ \mathbf{0} & I \end{bmatrix},\tag{2.140}$$

where $\mathbf{S}$ is the Schur complement

$$\mathbf{S} = -(\mathbf{C} + \mathbf{B} \mathbf{A}^{-1} \mathbf{B}^T).\tag{2.141}$$

The presence of the evolving no-melting region, where the porosity $\phi = 0$, affects the kernel space of the matrix $\mathbf{B}_D$. On one hand, the rank deficiency in matrix

$\mathbf{B}$ makes the Schur complement singular. On the other hand, the changing kernel space poses some difficulties applying classical null space methods to our system. Taking into consideration that the solver will be implemented in parallel in the future, an iterative solver is more suitable than a direct solver.

Rather than applying a general-purpose solver such as the generalized minimal residual method (GMRES) to the full linear system, we focus on iterative methods that exploit the structural properties of the block matrices. We start with a “direct” way to solve this derived saddle point system. Consider the block LU matrix factorization of (2.132) equivalent to (2.140),

$$\begin{bmatrix} I & \mathbf{0} \\ -\mathbf{B}^T \mathbf{A}^{-1} & I \end{bmatrix} \begin{bmatrix} I & \mathbf{0} \\ \mathbf{B}^T \mathbf{A}^{-1} & I \end{bmatrix} \begin{bmatrix} \mathbf{A} & \mathbf{B} \\ \mathbf{0} & \mathbf{S} \end{bmatrix} \begin{bmatrix} \mathbf{x} \\ \mathbf{y} \end{bmatrix} = \begin{bmatrix} I & \mathbf{0} \\ -\mathbf{B}^T \mathbf{A}^{-1} & I \end{bmatrix} \begin{bmatrix} \mathbf{F} \\ \mathbf{G} \end{bmatrix}. \quad (2.142)$$

We can solve for $\mathbf{x}$ and $\mathbf{y}$ with block backsubstitution,

$$\begin{aligned} \mathbf{x} &= \mathbf{A}^{-1}(\mathbf{F} - \mathbf{B}\mathbf{y}), \\ \mathbf{y} &= \mathbf{S}^{-1}(\mathbf{G} - \mathbf{B}^T \mathbf{A}^{-1} \mathbf{F}), \end{aligned} \quad (2.143)$$

where $\mathbf{A}^{-1}$ can be computed either directly using the Cholesky factorization or iteratively via the Conjugate Gradient method. The Schur complement $\mathbf{S}$ is usually non-invertible. Its “inverse” $\mathbf{S}^{-1}$ can be approximated with the Minimal Residual algorithm following Paige and Saunders (1975).

2.6.3 Uzawa Iteration

The Uzawa algorithm, originally introduced by Arrow et al. (1958), later gained popularity in computational fluid dynamics. It was later applied to the discretization of the Stokes problem using Mixed Finite Element methods. Notable variants incorporating an inexact inner solver to accelerate the Uzawa iteration was discussed by Elman and Golub (1994) and Bramble et al. (1997).

We begin with a brief overview of the inexact Uzawa iteration, which generates a sequence of approximations $\{\mathbf{x}_k\}$ and $\{\mathbf{y}_k\}$ as

$$\begin{aligned} \mathbf{x}_k &= \mathbf{x}_{k-1} + \mathbf{Q}_A^{-1} [\mathbf{F} - (\mathbf{A}\mathbf{x}_{k-1} + \mathbf{B}\mathbf{y}_{k-1})], \\ \mathbf{y}_k &= \mathbf{y}_{k-1} + \mathbf{Q}_B^{-1} (\mathbf{B}^T \mathbf{x}_k - \mathbf{C}\mathbf{y}_{k-1} - \mathbf{G}), \end{aligned} \quad (2.144)$$

where the initial conditions $\mathbf{x}_0$ and $\mathbf{y}_0$ are typically set to zero for simplicity. The matrices $\mathbf{Q}_A$ and $\mathbf{Q}_B$ are user-defined preconditioners. The inexact Uzawa iteration is formally presented in Algorithm 1.

The choice of $\mathbf{Q}_A^{-1}$ can be straightforward, we use $\mathbf{A}^{-1}$ to obtain an accurate $\mathbf{x}_k$. For $\mathbf{Q}_B$, some approaches choose a simple scaled diagonal matrix $\alpha\mathbf{I}$. However, such a simplistic choice does not guarantee convergence of our coupled system.

Algorithm 1 Inexact Uzawa Iteration

- 1: Initialize $\mathbf{x}_0 = \mathbf{0}$, $\mathbf{y}_0 = \mathbf{0}$, tolerance $\text{tol} = 1$ and residual $\text{res} = \infty$.
 - 2: **while** $\text{res} > \text{tol}$ **do**
 - 3: Obtain $\tilde{\mathbf{x}} = \mathbf{Q}_A^{-1}(\mathbf{F} - (\mathbf{A}\mathbf{x}_i + \mathbf{B}\mathbf{y}_i))$
 - 4: Update $\mathbf{x}_{i+1} = \mathbf{x}_i + \tilde{\mathbf{x}}$
 - 5: Obtain $\tilde{\mathbf{y}} = \mathbf{Q}_B^{-1}(\mathbf{B}^T\mathbf{x}_{i+1} - \mathbf{C}\mathbf{y}_i - \mathbf{G})$
 - 6: Update $\mathbf{y}_{i+1} = \mathbf{y}_i + \tilde{\mathbf{y}}$
 - 7: Update $\text{res} = \|\tilde{\mathbf{x}}\|_{l^2} + \|\tilde{\mathbf{y}}\|_{l^2}$
 - 8: **end while**
-

We now seek an alternative for the preconditioner $\mathbf{Q}_B$. For the remainder of the discussion, we set $\mathbf{Q}_A = \mathbf{A}$,

$$\mathbf{x}_k = \mathbf{A}^{-1}(\mathbf{F} - \mathbf{B}\mathbf{y}_k). \quad (2.145)$$

Substituting equation (2.145) back into the system (2.144) yields a first order Richardson iteration for $\mathbf{y}$ as

$$\mathbf{y}_k = \mathbf{y}_{k-1} + \mathbf{Q}_B^{-1}[\mathbf{B}^T\mathbf{A}^{-1}\mathbf{F} - \mathbf{G} - (\mathbf{B}^T\mathbf{A}^{-1}\mathbf{B} + \mathbf{C})\mathbf{y}_{k-1}]. \quad (2.146)$$

The residual for this formulation would be when $y_k = y_{k-1}$, so let

$$\mathbf{r} = \mathbf{B}^T\mathbf{A}^{-1}\mathbf{F} - \mathbf{G} - (\mathbf{B}^T\mathbf{A}^{-1}\mathbf{B} + \mathbf{C})\mathbf{y}_{k-1}, \quad (2.147)$$

and this can be decomposed as $[\mathbf{r}_S, \mathbf{r}_D]^T$ according to the two subsystems. It is evident from (2.141) and (2.143) that the closer the preconditioner $\mathbf{Q}_B$ approximates the Schur complement for the coupled system, the better the algorithm behaves. Therefore, we can construct an alternative preconditioner $\mathbf{Q}_B$ by approximating the Schur complement separately for the Stokes and the Darcy subsystems as

$$\mathbf{Q}_B = \begin{bmatrix} (\mathbf{B}_S^T \mathbf{A}_S^{-1} \mathbf{B}_S + \mathbf{C}_S) & \mathbf{0} \\ \mathbf{0} & (\mathbf{B}_D^T \mathbf{A}_D^{-1} \mathbf{B}_D + \mathbf{C}_D) \end{bmatrix} = \begin{bmatrix} -\mathbf{S}_S & \mathbf{0} \\ \mathbf{0} & -\mathbf{S}_D \end{bmatrix}. \quad (2.148)$$

In practice, the Schur complement is not formed explicitly. Instead we compute an approximate increment $\tilde{\mathbf{y}}_i$, $i \in \{S, D\}$ within the Krylov subspace $\mathbf{V}_{k,i} = \mathcal{K}_r(-\mathbf{S}_i, \mathbf{r}_i)$, which minimizes the l^2 norm of the residual, i.e.,

$$\tilde{\mathbf{y}}_i = \operatorname{argmin}_{\tilde{\mathbf{y}} \in \mathbf{V}_{k,i}} \|\mathbf{S}_i \tilde{\mathbf{y}} - \mathbf{r}_i\|, \quad i \in \{S, D\}. \quad (2.149)$$

Note that we may relax the minimization to accelerate the inner solver. The modified algorithm is presented formally in Algorithm 2.

Algorithm 2 Modified Uzawa Iteration

1: Initialize $\mathbf{x}_0 = \mathbf{0}$, $\mathbf{y}_0 = \mathbf{0}$, tolerance $\text{tol} > 0$ and residual $\text{res} = \infty$.

2: **while** $\text{res} > \text{tol}$ **do**

3: Obtain $\tilde{\mathbf{x}} = \mathbf{A}^{-1}(\mathbf{F} - (\mathbf{A}\mathbf{x}_i + \mathbf{B}\mathbf{y}_i))$, where $\tilde{\mathbf{x}} = [\tilde{\mathbf{x}}_S, \tilde{\mathbf{x}}_D]^T$

4: Update $\mathbf{x}_{i+1} = \mathbf{x}_i + \tilde{\mathbf{x}}$

5: Obtain $\mathbf{r} = \mathbf{B}^T \mathbf{x}_{i+1} + \mathbf{C}\mathbf{y}_i - \mathbf{G}$, where $\mathbf{r} = [\mathbf{r}_S, \mathbf{r}_D]^T$

6: Obtain

$$\begin{aligned} \tilde{\mathbf{y}}_S &= \operatorname{argmin}_{\tilde{\mathbf{y}} \in \mathbf{V}_{k,S}} \|\mathbf{S}_S \tilde{\mathbf{y}} - \mathbf{r}_S\|_{l^2} \\ \tilde{\mathbf{y}}_D &= \operatorname{argmin}_{\tilde{\mathbf{y}} \in \mathbf{V}_{k,D}} \|\mathbf{S}_D \tilde{\mathbf{y}} - \mathbf{r}_D\|_{l^2} \end{aligned}$$

7: Update $\mathbf{y}_{i+1} = \mathbf{y}_i + [\tilde{\mathbf{y}}_S, \tilde{\mathbf{y}}_D]^T$

8: Update $\text{res} = \|\tilde{\mathbf{x}}\|_{l^2} + \|\tilde{\mathbf{y}}\|_{l^2}$

9: **end while**

The Uzawa iteration, being a fixed point Richardson iteration, lends itself naturally to acceleration techniques, such as Anderson Acceleration Walker and Ni

(2011). We compare the result of our modified Uzawa iteration with the reference algorithm (2.143) and get identical results. Further investigation into its convergence behavior will be pursued in future work.

2.7 Convergence Test

In this section, we perform a convergence test on a 2D $M \times N$ grid with a pseudo 1D problem. We study a compacting column aligned along the y -direction, defined over the domain $y \in [-H, H]$ and $x \in [-L, L]$ with no flow boundary conditions imposed at $y = \pm H$.

For all tests presented below, we take $H = 2$ and $L = 0.2$, and the entire domain spans four compaction lengths. We fix the parameter $\Theta = 0$. Each problem is solved using four different levels of refinement in the y -direction, i.e., $N \in \{20, 40, 80, 160\}$. The code is implemented in PETSc/C++, with implementation details discussed in a later chapter.

2.7.1 1D Simplification

To begin with, we assume that both the solid and the liquid velocities have nonzero components only in the y -direction, i.e., $\check{\mathbf{v}}_s = (0, v(y))$ and $\phi\check{\mathbf{v}}_r = (0, u(y))$. The 2D equations are then simplified as

$$\begin{aligned} u + \phi^2 q'_l &= 0, \\ u' + \phi(q_l - q_s) &= 0, \\ [q_s - \frac{1}{3}(1 - 4\phi)v']' &= 1 - \phi, \\ v' - \phi(q_l - q_s) &= 0. \end{aligned} \tag{2.150}$$

The no flow boundary conditions for this one-dimensional problem are specified as

$$u(\pm H) = -v(\pm H) = 0. \tag{2.151}$$

When there is no melting present, $\phi = 0$, the equations reduce to a simple solution as

$$u = -v = 0, \quad q'_s = 1, \quad \text{and} \quad q_l = 0. \quad (2.152)$$

In the presence of melt $\phi > 0$, the equations can be reorganized as

$$\phi^2 \left(\frac{3 + \phi - 4\phi^2}{3\phi} u' \right)' - u = \phi^2(1 - \phi), \quad (2.153)$$

where all other quantities are expressed in terms of u as

$$v = -u, \quad \text{and} \quad q'_l = -\phi^{-2}u, \quad \text{and} \quad q_s = u'/\phi + q_l. \quad (2.154)$$

We define an auxiliary function R for the case where ϕ is constant:

$$R = \left(\phi^2 \frac{3 + \phi - 4\phi^2}{3\phi} \right)^{-1/2}. \quad (2.155)$$

2.7.2 2D Boundary Conditions

Despite the problem being reduced to one dimension, boundary conditions are still specified for the full 2D computational domain. To begin with, we list all the degrees of freedom (dofs) that must be prescribed on edges of each element $e \in \partial E \subset \partial\Omega$.

- Stokes velocity $\check{\mathbf{v}}_s$ and bubble function $\mathbf{b}$;
 - Normal part: $\check{\mathbf{v}}_s \cdot \boldsymbol{\nu}$ and supplemental edge averaged flux $|e|^{-1} \int_e \mathbf{b} \cdot \boldsymbol{\nu} ds$ are prescribed compatibly together, i.e., they should be prescribed with same type of boundary conditions;
 - Tangential part: $\check{\mathbf{v}}_s \cdot \boldsymbol{\tau}$.
- Edge averaged Darcy normal flux $|e|^{-1} \int_e \phi \check{\mathbf{v}}_l \cdot \boldsymbol{\nu} ds = |e|^{-1} \int_e \mathbf{u} \cdot \boldsymbol{\nu} ds$.

The following boundary conditions are designed to replicate the behavior of the one-dimensional problem within the two-dimensional grid.

- Top and Bottom Edge $y = \pm H$;
 - Normal Stokes velocity and supplemental edge averaged flux are prescribed with essential boundary conditions:

$$\check{\mathbf{v}}_s \cdot \boldsymbol{\nu} = v = 0, \quad |e|^{-1} \int_e \mathbf{b} \cdot \boldsymbol{\nu} \, ds = 0.$$

- Tangential Stokes velocity is prescribed with essential boundary condition:

$$\check{\mathbf{v}}_s \cdot \boldsymbol{\tau} = 0.$$

- Normal Darcy flux is prescribed with essential boundary condition:

$$|e|^{-1} \int_e \phi \check{\mathbf{v}}_r \cdot \boldsymbol{\nu} \, ds = |e|^{-1} \int_e u \, ds = 0.$$

- Left and Right Edges $x = \pm L$;
 - Normal Stokes velocity and supplemental edge averaged flux are prescribed with essential boundary conditions:

$$\check{\mathbf{v}}_s \cdot \boldsymbol{\nu} = v = 0, \quad |e|^{-1} \int_e \mathbf{b} \cdot \boldsymbol{\nu} \, ds = 0;$$

- Tangential Stokes velocity is prescribed with the natural boundary condition: free traction

$$t_0 = 0;$$

- Normal Darcy flux is prescribed with essential boundary condition:

$$|e|^{-1} \int_e \phi \check{\mathbf{v}}_r \cdot \boldsymbol{\nu} \, ds = |e|^{-1} \int_e u \, ds = 0.$$

We then test our MFEM implementation using three different porosity configurations, and compare the results against some of the closed-form solutions derived in Arbogast et al. (2017).

2.7.3 Column Compaction with Constant Porosity

First, we start with a constant porosity:

$$\phi(y) = \phi_0. \quad (2.156)$$

We solve the ODE (2.153) and write the closed form solution in terms of the auxiliary constant (2.155).

$$\begin{aligned} u &= -\phi_0^2(1 - \phi_0) \left[1 - \frac{\cosh(Ry)}{\cosh(RL)} \right], \\ v &= -u, \\ q_l &= (1 - \phi_0) \left[y - \frac{1}{R} \frac{\sinh(Ry)}{\cosh(RL)} \right] + c, \\ q_s &= (1 - \phi_0) \left[y - \frac{1 - 4\phi_0}{3 + \phi_0 - 4\phi_0^2} \frac{\phi_0}{R} \frac{\sinh(Ry)}{\cosh(RL)} \right] + c, \end{aligned} \quad (2.157)$$

where c is a constant.

In Table 2.3, we confirm an optimal second-order convergence rate in L^2 -norm of errors for the scalar velocities u and v . Note that the L^2 -norm of errors for the pressure potentials q_s and q_l are computed with the mid-point quadrature rule, which results in a second order superconvergence behavior for these quantities. In Figure 2.11, we demonstrates that the numerical solutions (dashed lines) closely match the closed-form solutions (solid lines).

$M \times N$	u		v		q_l		q_s	
	L^2 error	rate	L^2 error	rate	L^2 error	rate	L^2 error	rate
2×20	3.100e-05	-	3.100e-05	-	3.285e-03	-	3.638e-05	-
2×40	8.047e-06	1.95	8.047e-06	1.95	8.731e-04	1.91	9.671e-06	1.91
2×80	2.031e-06	1.99	2.031e-06	1.99	2.218e-04	1.98	2.457e-06	1.98
2×160	5.091e-07	2.00	5.091e-07	2.00	5.567e-05	1.99	6.166e-07	1.99

Table 2.3: Constant porosity (2.156), with $\phi_0 = 0.04$. L^2 norm of errors and convergence rates for the scalar velocities u and v , the solid and the liquid pressure potentials q_s and q_l .

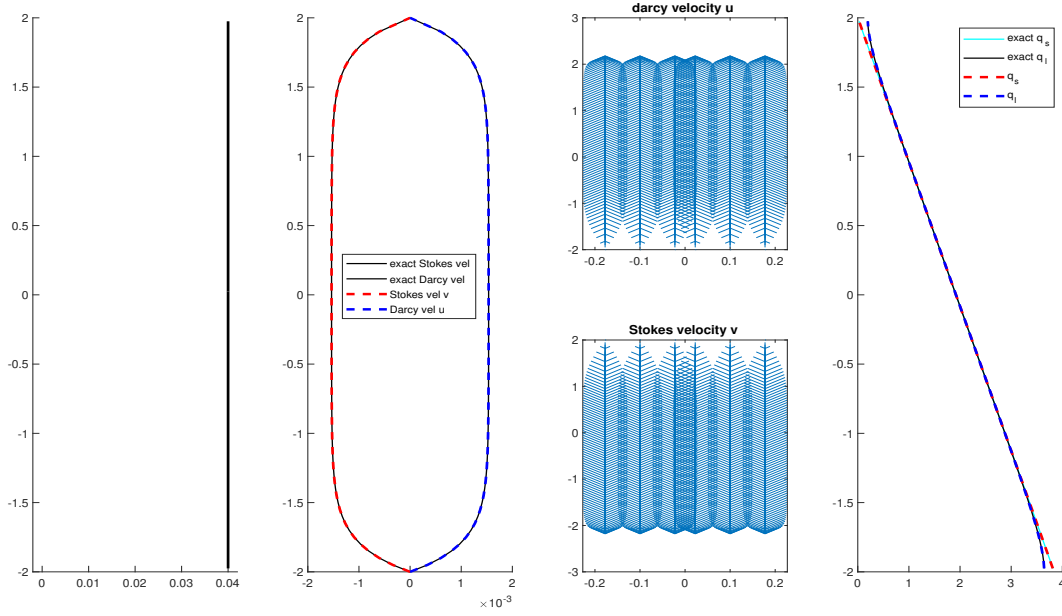


Figure 2.11: Constant porosity (2.156) with $\phi_0 = 0.04$. Shown are the porosity ϕ , scalar velocities u and v along with closed form solution, velocity vectors $\tilde{\mathbf{v}}_s$ and $\phi\tilde{\mathbf{v}}_r$ reconstructed on the edge quadrature points, q_l and q_s together.

2.7.4 Column Compaction with Discontinuous Porosity

We proceed to test our implementation with a discontinuous porosity distribution, featuring a “jump” at $y = 0$. The region $y > 0$ part is considered as degenerate $\phi = 0$.

$$\phi(z) = \begin{cases} 0 & \text{if } z > 0, \\ \phi_0 & \text{if } z \leq 0, \end{cases} \quad (2.158)$$

The even number of mesh grid in y -direction ensures that the discontinuity lands on the edge between two elements. The closed form solution is also given in terms of the auxiliary constant (2.155) as:

- When $y > 0$,

$$u = -v = 0, \quad q_l = 0, \quad \text{and} \quad q_s = z + c;$$

$M \times N$	u		v		q_l		q_s	
	L^2 error	rate	L^2 error	rate	L^2 error	rate	L^2 error	rate
2×20	2.980e-05	-	2.980e-05	-	3.794e-03	-	4.202e-05	-
2×40	7.681e-06	1.96	7.681e-06	1.96	1.005e-03	1.92	1.114e-05	1.92
2×80	1.958e-06	1.97	1.958e-06	1.97	2.472e-04	2.02	2.738e-06	2.02
2×160	4.974e-07	1.98	4.974e-07	1.98	5.972e-05	2.04	6.615e-07	2.05

Table 2.4: Discontinuous porosity (2.158), with $\phi_0 = 0.04$. L^2 norm of errors and convergence rates for the scalar velocities u and v , the solid and the liquid pressure potentials q_s and q_l .

- When $y < 0$ and $\phi_0 \neq 0$,

$$\begin{aligned}
u &= \phi_0^2(1 - \phi_0) \left[1 - \cosh(Ry) + \frac{1 - \cosh(RL)}{\sinh(RL)} \sinh(Ry) \right], \\
v &= -u, \\
q_l &= -(1 - \phi_0) \left[z - \frac{1}{R} \sinh(Ry) + \frac{1 - \cosh(RL)}{R \sinh(RL)} \cosh(Ry) \right] + c, \\
q_s &= q_l + \frac{u'}{\phi_0} + c,
\end{aligned}$$

where c is a constant.

In Table 2.4, we also confirm an optimal second-order convergence rate in L^2 -norm of errors for the scalar velocities u and v and a second-order superconvergence rate of the pressure potentials q_s and q_l due to using the mid-point quadrature rule. In Figure 2.12, we show that the numerical solutions (dashed lines) closely match the closed-form solutions (solid lines) with a degenerate region.

2.7.5 Column Compaction With Quadratic Porosity.

For the final test, we consider our implementation with the continuous quadratic porosity

$$\phi(y) = \begin{cases} 0 & \text{if } y > 0, \\ \phi_0 y^2 & \text{if } y \leq 0. \end{cases} \quad (2.159)$$

We focus on the case where $\phi_0 = 0.01$, which is not accurately captured by the closed-form solution derived in Arbogast et al. (2017) due to the breakdown of the

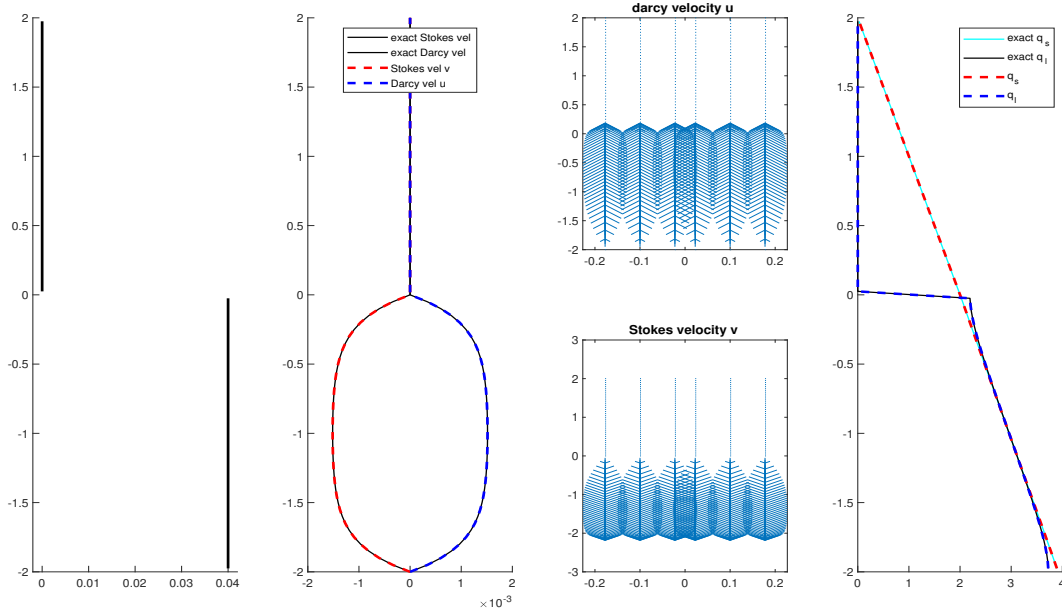


Figure 2.12: Discontinuous porosity (2.158) with $\phi_0 = 0.04$. Shown are the porosity ϕ , scalar velocities u and v along with closed form solution, velocity vectors $\check{\mathbf{v}}_s$ and $\phi\check{\mathbf{v}}_r$ reconstructed on the edge quadrature points, q_l and q_s together.

assumption $\phi \ll 1$. To address this, we present an alternative approach of constructing an approximation solution to the second-order ordinary differential equation (ODE) (2.153).

To begin with, we rewrite our second order ODE into

$$f(u'', u', u, z) = P(z)u'' + Q(z)u' - u = \phi^2(1 - \phi), \quad (2.160)$$

where $z = |y|$ for simplicity and

$$\begin{aligned} P(z) &= \phi_0 z^2 + \frac{\phi_0^2 z^4}{3} - \frac{4\phi_0^3 z^6}{3}, \\ Q(z) &= -2\phi_0 z - \frac{8\phi_0^3 z^5}{3}. \end{aligned} \quad (2.161)$$

We conclude that the singular point at $z = 0$ is a regular singular point given

$$\lim_{z \rightarrow 0} z \frac{Q(z)}{P(z)} < \infty, \text{ and } \lim_{z \rightarrow 0} z^2 \frac{1}{P(z)} < \infty, \quad (2.162)$$

which suggests that this second-order ODE can be approximated using a series solution via the Frobenius method. The solution can be interpreted as the sum of a particular solution solving $f(u'', u', u, z) = \phi^2(1 - \phi)$ and a homogeneous power-series solution solving $f(u'', u', u, z) = 0$. We assume that the series solution u and its first and second order derivatives take the form

$$u = \sum_{n=0}^{\infty} c_n z^{n+r}, \quad u' = \sum_{n=0}^{\infty} (n+r) c_n z^{n-1+r}, \quad \text{and} \quad u'' = \sum_{n=0}^{\infty} (n+r)(n-1+r) c_n z^{n-2+r}. \quad (2.163)$$

For the homogenous solution, substitute these series (2.163) in the homogeneous equation. We have the recurrence relationship of the coefficients as

$$\begin{aligned} & \left\{ \phi_0 \left[(n+r-3)(n+r) \right] - 1 \right\} c_n + \\ & \left\{ \frac{\phi_0^2}{3} \left[(n+r-2)(n+r-3) \right] \right\} c_{n-2} + \\ & \left\{ \frac{-4\phi_0^3}{3} \left[(n+r-4)(n+r-3) \right] \right\} c_{n-4} = 0, \end{aligned} \quad (2.164)$$

where $c_m = 0$ if $m < 0$. We obtain the indicial solution by equating the coefficient associated to the c_0 term to zero, i.e.,

$$\phi_0 \left[(0+r-3)(0+r) \right] - 1 = 0. \quad (2.165)$$

The associated quadratic equation yields two roots, which can be written explicitly with the quadratic formula as

$$r_1 = \frac{3 + \sqrt{9 + 4/\phi_0}}{2} \quad \text{and} \quad r_2 = \frac{3 - \sqrt{9 + 4/\phi_0}}{2}. \quad (2.166)$$

Here, we denote u_{r_1} and u_{r_2} the two homogenous solutions with different powers r_1 and r_2 .

For the particular solution, since the right hand side of (2.160) is an even polynomial, we can find a solution with $r = 0$, and all odd indexed coefficients being

zero. Moreover, $c_0 = c_2 = 0$ and the first three non-zero coefficients of the particular solution are

$$\begin{aligned} c_4 &= \frac{\phi_0^2}{4\phi_0 - 1}, \\ c_6 &= \frac{-\phi_0^3 - 4\phi_0^2 c_4}{18\phi_0 - 1}, \\ c_8 &= \frac{80/3\phi_0^3 c_4 - 10\phi_0^2 c_6}{40\phi_0 - 1}. \end{aligned} \tag{2.167}$$

The remaining coefficients can be determined through the recurrence relationship (2.163). We assume the solution takes the form as a linear combination of particular solution and two homogeneous solutions:

$$u = u_p + Au_{r_1} + Bu_{r_2}, \tag{2.168}$$

where u_p is the particular solution, u_{r_1} and u_{r_2} are the two homogeneous solutions with different powers r_1 and r_2 . The linear coefficients A and B can be determined by solving a linear system arising from the imposed boundary conditions. In our case, we drop the negative root r_2 when the singular point $z = 0$ is included. The coefficient A can therefore be solved with the boundary condition at $z = 2$ as

$$A = -u_p(z = 2)/u_{r_1}(z = 2). \tag{2.169}$$

Using the full series solution (2.168), we now perform the convergence test on two different porosity scales $\phi_0 = 0.01$ and $\phi_0 = 0.001$.

In Table 2.5 and Table 2.6, we observe second order convergence rate of the L^2 -norm of errors for scalar velocities u and v without degradation. However, it is surprising that the solid and the liquid pressure potentials q_s and q_l do not exhibit the correct convergence rate towards the new closed-form solution. We notice that the numerical solution and the close-form solution no longer agree with each other close to the bottom boundary $y = -2$. Figure 2.13 and Figure 2.14 illustrate that the numerical solutions (dashed lines) closely match the closed-form solutions (solid lines), despite the pressure potentials not converging to the closed-form solution. Further investigation is needed to understand this discrepancy.

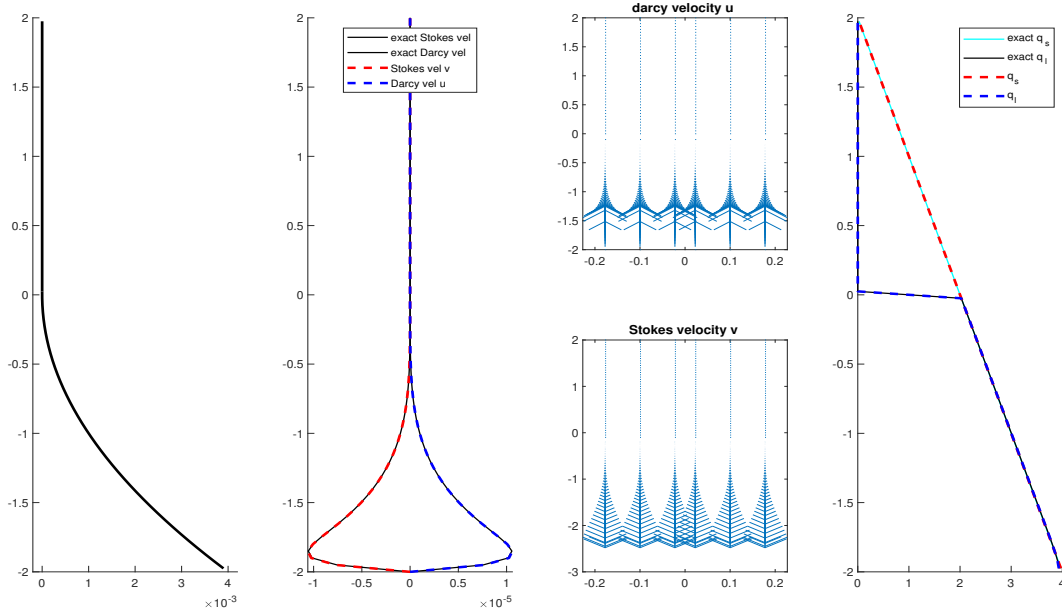


Figure 2.13: Quadratic porosity (2.159) with $\phi_0 = 0.001$. Shown are the porosity ϕ , scalar velocities u and v along with closed form solution, velocity vectors $\tilde{\mathbf{v}}_s$ and $\phi\tilde{\mathbf{v}}_r$ reconstructed on the edge quadrature points, q_l and q_s together.

$M \times N$	u		v		q_l		q_s	
	L^2 error	rate	L^2 error	rate	L^2 error	rate	L^2 error	rate
2×20	9.558e-07	-	9.558e-07	-	1.210e-03	-	1.895e-06	-
2×40	3.176e-07	1.59	3.176e-07	1.59	3.618e-04	-	6.278e-07	-
2×80	8.686e-08	1.87	8.686e-08	1.87	3.844e-04	-	5.518e-07	-
2×160	2.222e-08	1.97	2.222e-08	1.97	5.099e-04	-	7.0145e-07	-

Table 2.5: Quadratic porosity (2.159) with $\phi_0 = 0.001$. L^2 norm of errors and convergence rates for the scalar velocities u and v , the solid and the liquid pressure potentials q_s and q_l .

2.8 Simulation of a Simple Mid-Ocean Ridge Model

We now revisit the Mid-Ocean ridge test case in Arbogast et al. (2017). The full system of equations is solved on a dimensionless rectangular domain defined by $x \in [-0.5, 0.5]$ and $y \in [-0.5, 0.0]$. Boundary conditions are prescribed by imposing classical corner flow solution for the Stokes velocity as described by Spiegelman and

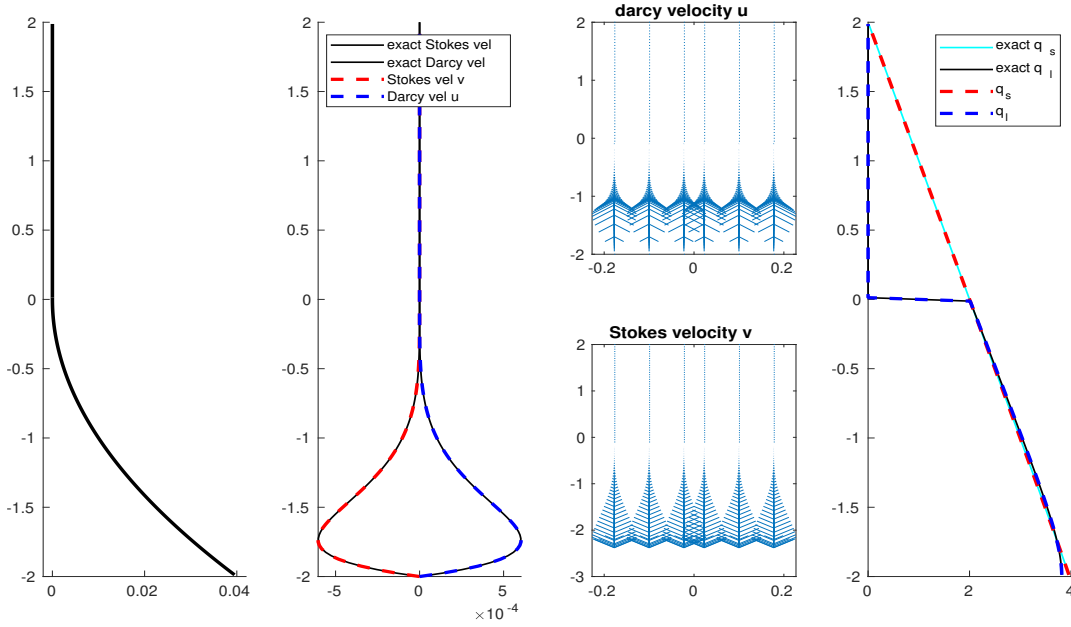


Figure 2.14: Quadratic porosity (2.159) with $\phi_0 = 0.01$. Shown are the porosity ϕ , scalar velocities u and v along with closed form solution, velocity vectors $\tilde{\mathbf{v}}_s$ and $\phi\tilde{\mathbf{v}}_r$ reconstructed on the edge quadrature points, q_l and q_s together.

$M \times N$	u		v		q_l		q_s	
	L^2 error	rate	L^2 error	rate	L^2 error	rate	L^2 error	rate
2×20	2.438e-05	-	2.438e-05	-	5.571e-03	-	7.842e-05	-
2×40	6.249e-06	1.96	6.249e-06	1.96	7.416e-03	-	9.870e-05	-
2×80	1.486e-06	2.07	1.486e-06	2.07	9.317e-03	-	1.254e-04	-
2×160	3.908e-07	1.96	3.908e-07	1.96	1.056e-02	-	1.439e-04	-

Table 2.6: Quadratic porosity (2.159) with $\phi_0 = 0.01$. L^2 norm of errors and convergence rates for the scalar velocities u and v , the solid and the liquid pressure potentials q_s and q_l .

McKenzie (1987) as essential boundary condition along the entire boundary of the computational domain

$$\mathbf{v}_s = \frac{2U_0}{\pi(x^2 + y^2)} \begin{pmatrix} \tan^{-1}(\frac{x}{-y})(x^2 + y^2) + xy \\ z^2 \end{pmatrix}, \quad (2.170)$$

where $U_0 = 10^{-9}\text{m/s} \approx 3.2\text{cm/yr}$ is the constant upwelling velocity of mantle. In accordance with the mass conservation condition, we impose zero Darcy flux across

the boundary. We then set a not identically vanishing porosity by the formula:

$$\phi(x, y) = \begin{cases} 0.05 \left(\frac{0.375 + y}{0.375} \right)^2 \left(1 - \frac{|x|}{|y| + l} \right), & \text{if } |y| \leq 0.375 \text{ and } |x| \leq |y| + l, \\ 0, & \text{otherwise,} \end{cases} \quad (2.171)$$

where $l = 20$ m is the offset used to avoid a singularity at the center $x = 0$, i.e., we translate the coordinates x to $x - l$ if $x < 0$, and $x + l$ when $x > 0$. In Figure 2.15, we show the porosity distribution within the computational domain. We perform the current numerical simulation over the full domain.

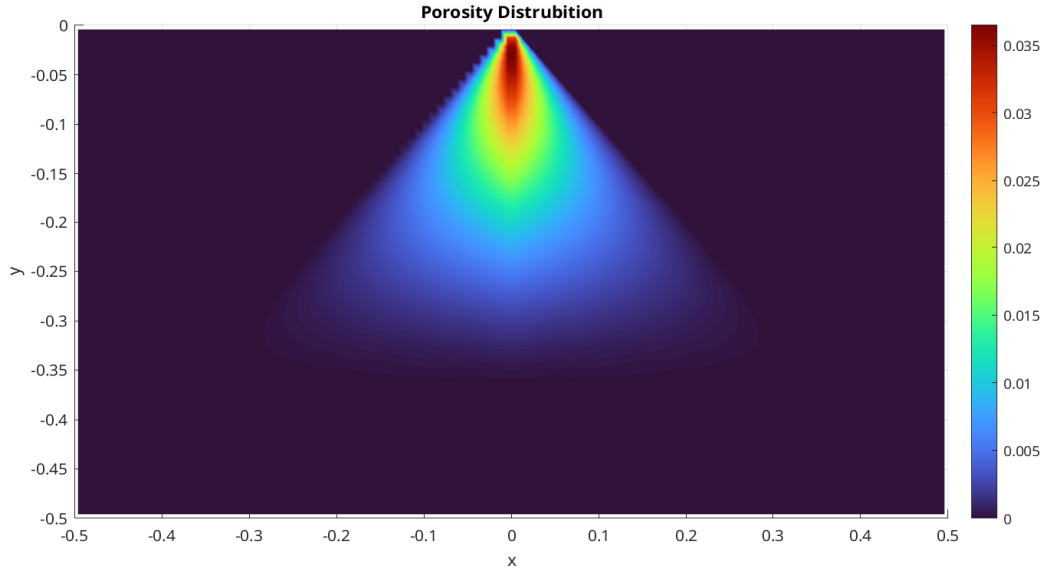


Figure 2.15: Porosity distribution.

In Figure 2.16 and Figure 2.17, we exhibit the dimensionless Stokes velocity ($\check{\mathbf{v}}_s, \check{q}_s$) and Darcy velocity ($\phi \check{\mathbf{v}}_r, \check{q}_l$) respectively. We observe the molten magma rising toward the surface and concentrating in regions where most porosity is presents. The solid matrix upwells from the bottom of the domain. We observe compaction occurs in the partially molten region where the buoyancy can no longer support overlaying the solid matrix due to the density difference between the solid and the liquid phases. Despite the presence of an extensive no melting region, the system is solved successfully using the modified Uzawa iteration

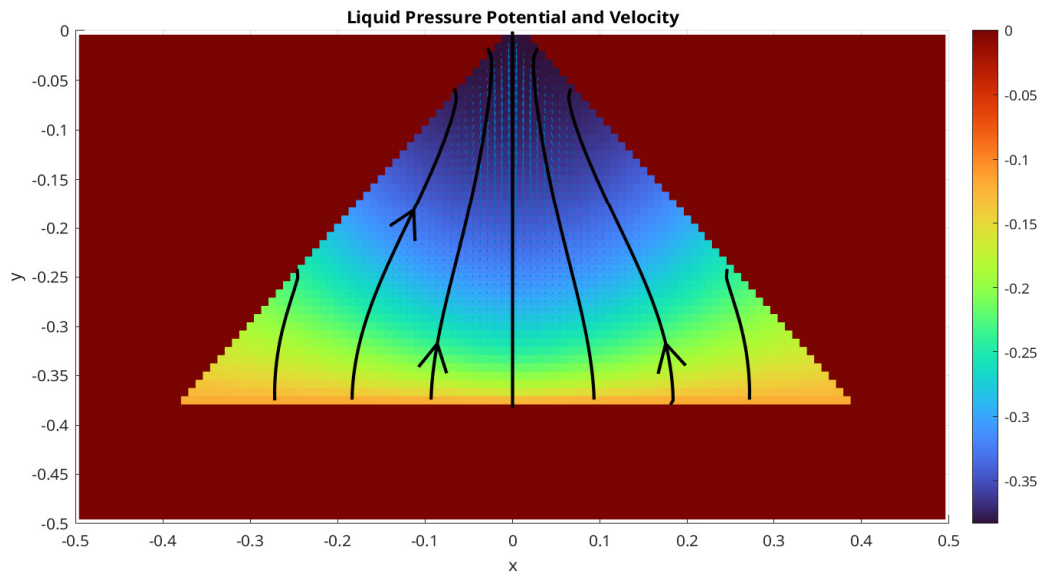


Figure 2.16: Liquid pressure potential and velocity.

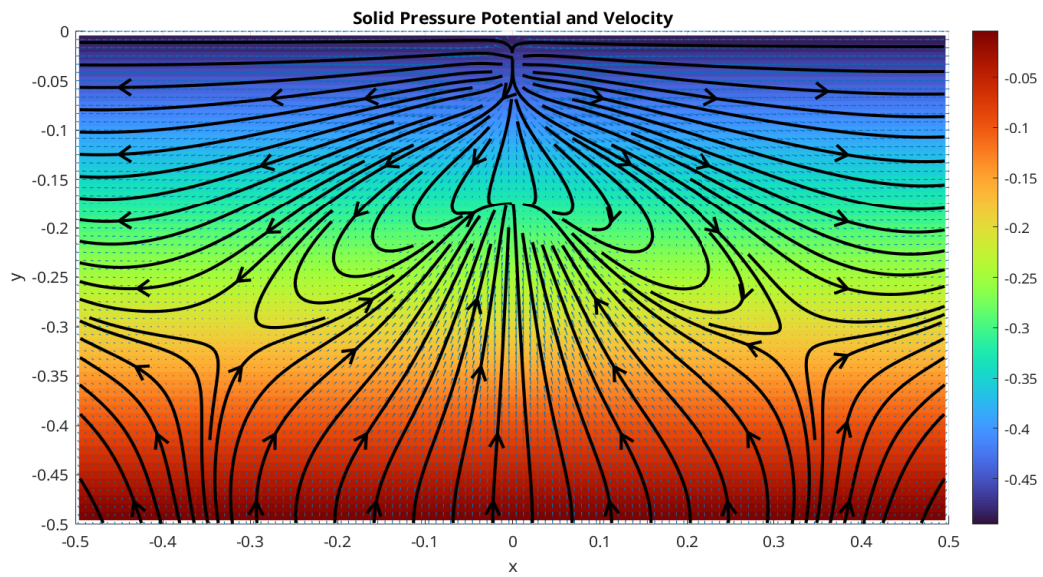


Figure 2.17: Solid pressure potential and velocity.

2.9 Finite Volume Method

The finite volume method (FVM) is a widely used discretization method for various problems governed by conservation laws. The FVM is particularly robust and well-suited for arbitrary complex geometry. A key advantage of FVM that benefits this simulation is its natural enforcement of local mass conservation.

To begin with, we consider a general hyperbolic conservation law regarding a scalar variable u as

$$\begin{cases} \frac{\partial u(\mathbf{x}, t)}{\partial t} + \nabla \cdot \mathbf{f}(u; \mathbf{x}, t) = 0, & t > 0, \mathbf{x} \in \Omega, \\ u(\mathbf{x}, 0) = u_0(\mathbf{x}), & \mathbf{x} \in \Omega, \end{cases} \quad (2.172)$$

where we assume the domain $\Omega \subset \mathbb{R}^2$. The term $\mathbf{f}$ represents the flux transporting the scalar variable u . The basic semi-discretized formulation of the finite volume method can be written as

$$\frac{\partial \bar{u}_E}{\partial t} + \frac{1}{|E|} \int_{\partial E} \mathbf{F}(\mathbf{x}, t) \cdot \boldsymbol{\nu} d\mathbf{x} = 0, \quad (2.173)$$

where the cell-averaged value $\bar{u}$ is calculated as

$$\bar{u}_E = \frac{1}{|E|} \int_E u(\mathbf{x}, t) d\mathbf{x}, \quad (2.174)$$

where $|E|$ denote the area of the cell E . Here, $\mathbf{F}(\mathbf{x}, t)$ denotes the approximated numerical flux. We employ the Lax-Friedrichs numerical flux

$$\mathbf{F}(u^+, u^-) = \frac{1}{2} \left[(\mathbf{f}(u^+) + \mathbf{f}(u^-)) \cdot \boldsymbol{\nu} - \alpha_{LF}(u^+ - u^-) \right], \quad (2.175)$$

where u^+ and u^- denote the values approximated from the perspective of element $E^+ \in \mathcal{T}_h$ and $E^- \in \mathcal{T}_h$ respectively, where $E^+ \cap E^-$ is an edge of the mesh. The unit normal vector $\boldsymbol{\nu}$ points from E^- to E^+ , and is orthogonal to the edge. The parameter α_{LF} is the Lax-Friedrichs stabilizer factor. Depending on the available information about the solution, there are two possible approaches for computing α_{LF} :

- The global Lax-Friedrichs Stabilizer:

$$\alpha_{LF} = \max_{\mathbf{x} \in \Omega, t > 0, u \in \mathbb{R}} \left| \frac{\partial \mathbf{f}(u; \mathbf{x}, t) \cdot \boldsymbol{\nu}}{\partial u} \right|;$$

- The local Lax-Friedrichs Stabilizer:

$$\alpha_{LF} = \max_{\text{edges } e} \left(\left| \frac{\partial \mathbf{f}(u^+; \mathbf{x}, t) \cdot \boldsymbol{\nu}}{\partial u} \right|_e, \left| \frac{\partial \mathbf{f}(u^-; \mathbf{x}, t) \cdot \boldsymbol{\nu}}{\partial u} \right|_e \right).$$

The numerical flux $\mathbf{F}$, as defined in equation (2.175), is consistent and conservative across element interfaces. We now replace the u^+ and u^- with reconstructed values $\mathcal{R}^+$ and $\mathcal{R}^-$ and express the numerical flux as

$$\mathbf{F}(\mathcal{R}^+, \mathcal{R}^-) = \frac{1}{2} [(\mathbf{f}(\mathcal{R}^+) + \mathbf{f}(\mathcal{R}^-) \cdot \boldsymbol{\nu} - \alpha_{LF}(\mathcal{R}^+ - \mathcal{R}^-)]. \quad (2.176)$$

Here, the reconstructed value $\mathcal{R}$ is of higher-order accuracy. We evaluate the integrals over each edge $e_i \in \partial E$ with a suitable quadrature rule. Let $|e_i|$ denote the length of edge e_i . Assuming a quadrature rule with G point per edge, the semi-discretized formulation becomes:

$$\frac{\partial \bar{u}_E}{\partial t} + \sum_{i=0}^4 \frac{|e_i|}{|E|} \sum_{g=0}^G \omega_{i,g} \mathbf{F}(\mathcal{R}_{i,g}^+, \mathcal{R}_{i,g}^-) \cdot \boldsymbol{\nu}_i = 0, \quad (2.177)$$

where $\omega_{i,g}$ represents the weight associated to the g^{th} quadrature points on edge e_i .

2.10 The Multi-level Weighted Essentially Non-Oscillatory (ML-WENO) Method

We developed an accurate, versatile, robust and efficient finite volume multi level weighted essentially non oscillatory (ML-WENO) reconstruction in Arbogast et al. (2024). ML-WENO is primarily used to reconstruct values on both sides of the element interfaces. It can also be applied to a general reconstruction of discontinuous variables, e.g., piece-wise constant discontinuous Darcy pressure.

2.10.1 Stencil Polynomials

Consider rectangular stencils $\mathcal{S} = \{E_{i,j}, i \leq s, j \leq t\} \subset \mathcal{T}_h$ on a quasi uniform logically rectangular mesh, which covers the area $\Omega_{\mathcal{S}} = \cup_{E \in \mathcal{S}} E$. For each stencil, we

construct a tensor product stencil polynomial $Q_{s,t}^{\mathcal{S}} \in \mathbb{Q}_{s-1,t-1}(\Omega_{\mathcal{S}})$. The scaled tensor product stencil polynomial is expressed as

$$Q_{s,t}^{\mathcal{S}}(x, y) = \sum_{p < s, q < t} c_{p,q} \left(\frac{x - x_{\mathcal{S}}}{h_{\mathcal{S}}} \right)^p \left(\frac{y - y_{\mathcal{S}}}{h_{\mathcal{S}}} \right)^q, \quad (2.178)$$

where $(x_{\mathcal{S}}, y_{\mathcal{S}})$ is any point in the stencil $\mathcal{S}$. We choose the stencil “center” point: the intersection point of two diagonal lines joining top left, bottom right and top right, bottom left corners. Assuming that each cell $E_{i,j} \in \mathcal{S} \subset \mathcal{T}_h$ is shape regular as in Definition 2.1, we define the stencil scale parameter $h_{\mathcal{S}} = \sum_{i \leq s, j \leq t} E_{i,j} / (st)$ as the average diameter of all cells in the stencil. Introducing the normalized coordinates

$$\xi = \frac{x - x_{\mathcal{S}}}{h_{\mathcal{S}}}, \quad \text{and} \quad \eta = \frac{y - y_{\mathcal{S}}}{h_{\mathcal{S}}}. \quad (2.179)$$

We can rewrite equation (2.178) in normalized coordinates as

$$\hat{Q}_{s,t}^{\mathcal{S}}(\xi, \eta) = \sum_{p < s, q < t} c_{p,q} \xi^p \eta^q. \quad (2.180)$$

The tensor product stencil polynomial satisfies the condition that the cell-averaged value (2.174) is preserved through integration over each cell as

$$\frac{1}{|E_{i,j}|} \iint_{E_{i,j}} Q_{s,t}^{\mathcal{S}}(x, y) dx dy = \bar{u}_{i,j}, \quad \forall E_{i,j} \in \mathcal{S}, \quad (2.181)$$

where $\bar{u}_{E_{i,j}}$ represents the cell-averaged scalar variable over cell $E_{i,j}$.

One way to construct a stencil polynomial $Q_{s,t}^{\mathcal{S}}$ is using basis polynomials. Let $Q_{s,t}^{\mathcal{S}} = \sum_{i,j} \bar{u}_{i,j} \phi_{s,t}^{i,j}$, where the basis polynomials $\phi_{s,t}^{i,j}$ satisfy

$$\frac{1}{|E_{i',j'}|} \iint_{E_{i',j'}} \phi_{s,t}^{i,j}(x, y) dx dy = \begin{cases} 1 & (i', j') = (i, j) \\ 0 & (i', j') \neq (i, j) \end{cases}, \quad \forall E_{i',j'} \in \mathcal{S}, \quad (2.182)$$

which always leads to an $(st) \times (st)$ non-singular linear system. We can write the basis polynomials in terms of normalized coordinates ξ and η as well, and rewrite them as

$$\hat{Q}_{s,t}^{\mathcal{S}}(\xi, \eta) = \sum_{i,j} \bar{u}_{i,j} \hat{\phi}_{s,t}^{i,j}(\xi, \eta). \quad (2.183)$$

The approxmatibility of a tensor product polynomial is related to the associated complete polynomial , as discussed by Dupont and Scott (1980a). Given a bounded interpolation projection operator $\mathcal{Q}$, for all $\mathbf{x} \in E \in \mathcal{S}$, we have

$$|D^\alpha u(\mathbf{x}) - D^\alpha(\mathcal{Q}u(\mathbf{x}))| \leq \begin{cases} Ch^{r-|\alpha|} & \text{if } u \text{ is smooth on the stencil,} \\ C & \text{otherwise,} \end{cases} \quad (2.184)$$

where $\alpha = (\alpha_1, \alpha_2)$ is a two-dimensional multi-index, and $|\alpha| = \alpha_1 + \alpha_2 \leq r$. This theorem applies to our stencil polynomials (2.178).

In most two-dimensional cases, we implement a square stencil with $s = t = r$. Uneven stencils ($s \neq t$) are used in the following two situations.

- When some a prior knowledge of the solution is acquired before simulation, e.g., the transport velocity is known to be fixed in a single direction.
- When derivatives are approximated, e.g., diffusive flux is computed across the element edge, where a stretched stencil is necessary to compensate for the loss of accuracy associated with derivative approximation.

For simplicity, we restrict the following discussions to the square case $s = t = r$.

2.10.2 Stencil Polynomial Smoothness Indicators

A smoothness indicator σ is defined to quantify the smoothness of the tensor product polynomial $Q_{r,r}^{\mathcal{S}}$ on the stencil $\mathcal{S}$. The classical approach by Jiang and Shu (1996) and Friedrich (1998) defines σ in analogue to a Sobolev seminorm as

$$\sigma_{JS} = \sum_{1 \leq |\alpha| \leq r} \int \int_{E_0} \frac{h_s^{2|\alpha|}}{|E_0|} (\mathcal{D}^\alpha Q(x, y))^2 dx dy, \quad (2.185)$$

where E_0 can be any cell $E \in \mathcal{S}$, and is usually referred to as the target cell, i.e., the cell E from witch (x, y) is taken in $Q_{r,r}^{\mathcal{S}}(x, y)$.

The Jiang-Shu smoothness indicator can be computed utilizing the predefined basis polynomials (2.182):

$$\begin{aligned}
\sigma_{JS} &= \sum_{1 \leq |\alpha| \leq r} \frac{h_s^{2|\alpha|}}{|E_0|} \iint_{E_0} (\mathcal{D}^\alpha Q(x, y))^2 dx dy \\
&= \frac{h_s^2}{|E_0|} \sum_{1 \leq |\alpha| \leq r} \iint_{\hat{E}_0} (\mathcal{D}^\alpha \hat{Q}(\xi, \eta))^2 d\xi d\eta \\
&= \frac{h_s^2}{|E_0|} \sum_{1 \leq |\alpha| \leq r} \iint_{\hat{E}_0} \left(\sum_{ij} \bar{u}_{ij} \mathcal{D}^\alpha \hat{\phi}_{i,j}(\xi, \eta) \right)^2 d\xi d\eta \tag{2.186} \\
&= \frac{h_s^2}{|E_0|} \sum_{ij} \sum_{i'j'} \bar{u}_{ij} \bar{u}_{i'j'} \sum_{1 \leq |\alpha| \leq r} \iint_{\hat{E}_{ij}} \mathcal{D}^\alpha \hat{\phi}_{ij}(\xi, \eta) \mathcal{D}^\alpha \hat{\phi}_{i'j'}(\xi, \eta) d\xi d\eta \\
&= \frac{h_s^2}{|E_0|} \sum_{ij} \sum_{i'j'} \bar{u}_{ij} \bar{u}_{i'j'} \sigma_{ij}^{i'j'},
\end{aligned}$$

where the coefficient tensor $\sigma_{ij}^{i'j'}$ can be precomputed before the time-stepping loop, after the mesh is established.

Alternatively, we can compute the Jiang-Shu smoothness indicator directly using the polynomial coefficients formulation (2.180) as

$$\begin{aligned}
\sigma_{JS} &= \frac{h_s^2}{|E_0|} \sum_{1 \leq |\alpha| \leq r} \iint_{\hat{E}_0} (\mathcal{D}^\alpha \hat{Q}(\xi, \eta))^2 d\xi d\eta \\
&= \sum_{|\gamma| \leq r} \sum_{|\beta| \leq r} c_\gamma c_\beta \left(\sum_{1 \leq |\alpha| \leq r} \frac{h_s^2}{|E_0|} \iint_{E_0} \mathcal{D}^\alpha \xi^\gamma \mathcal{D}^\alpha \eta^\beta d\xi d\eta \right) \tag{2.187} \\
&= \sum_{|\gamma| \leq r} \sum_{|\beta| \leq r} c_\gamma c_\beta \zeta_{\gamma, \beta},
\end{aligned}$$

which paves the way for further simplification in (2.190) below.

The smoothness indicator exhibits the following convergence property: there exists a constant $C > 0$ such that when $h \rightarrow 0^+$,

$$\sigma = \begin{cases} Ch^2 + \mathcal{O}(h^3) & \text{u is smooth on } \Omega_s, \\ \Theta(1) & \text{u is not smooth on } \Omega_s. \end{cases} \tag{2.188}$$

Actually $\sigma = O(1)$ in the nonsmooth case, but in practice we find that $\sigma = \Theta(1)$. Being $\Theta(1)$ means that σ is bounded above and below by a constant.

2.10.3 Two Alternative Smoothness Indicators

We propose two alternative ways of defining a smoothness indicator

- *Simple smoothness indicator* Huang et al. (2023)

$$\sigma_{\text{simp}} = \frac{1}{N_s - 1} \sum_k (\bar{u}_k - \bar{u}_0)^2, \quad (2.189)$$

where $\bar{u}_0$ is the cell averaged solution in the target cell. This simple smoothness indicator is designed to reduce the computational cost and to deal with distorted stencils on unstructured meshes. However, this simple smoothness indicator is not as robust as the classic Jiang-Shu smoothness indicator.

- *Polynomial smoothness indicator* Arbogast et al. (2025)

$$\sigma_P = \sum_{\alpha} \zeta_{\alpha, \alpha} c_{\alpha}^2 \quad (2.190)$$

which is obtained by dropping all the cross terms appeared in the formulation (2.187). This alternative serves as a good approximation to the classic Jiang-Shu smoothness indicator while the computing efficiency is greatly improved.

2.10.4 ML-WENO Weighting

Given a target cell $E_{i,j}$, we can create a nonempty set of stencils $\{\mathcal{S}_l \ni E_{i,j}, l = 0, 1, \dots, L, L \geq 0\}$. (See Figure 2.18 for an example.) The reconstruction of u on the target cell $E_{i,j}$ is a convex combination of the stencil polynomials defined in equation (2.183)

$$\mathcal{R}(\mathbf{x}) = \sum_l \tilde{\omega}_l Q^{\mathcal{S}_l}(\mathbf{x}), \quad \mathbf{x} \in E_{i,j}, \quad (2.191)$$

where $\sum_l \tilde{\omega}_l = 1$ and $\tilde{\omega}_l$ are the normalized nonlinear weights associated with stencils. We begin by arbitrarily choosing a set of linear weights $\{\omega_l\}$ and scale them with

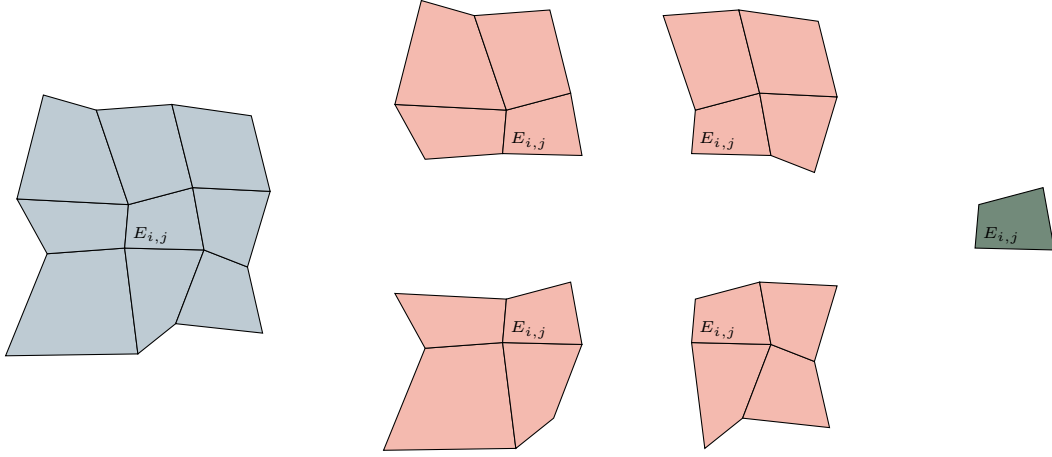


Figure 2.18: An example of a (3,2,1) multi-level stencils combination on a logically rectangular quadrilateral mesh.

stencil smoothness indicator as

$$\hat{\omega}_l = \frac{\omega_l}{(\sigma_l + \epsilon h_0^2)^{ar_l + n_l}}, \quad (2.192)$$

where $r_l = \max\{s, t\} = r$ in the cases of using square stencils, and the constants $\epsilon = 1e-4$ and $a > 0.5$ are chosen accordingly. The biasing factor $n_l = n(r_l)$ is used to biasing further away from the constant level, whose smoothness indicator is always zero. We choose

$$n(r_l) = n_l = \begin{cases} 1, & \text{if } r_l = 1, \\ 3, & \text{if } r_l = 2, \\ 4, & \text{if } r_l \geq 3. \end{cases} \quad (2.193)$$

We finally renormalise the scaled weights as

$$\tilde{\omega}_l = \frac{\hat{\omega}_l}{\sum_{l'} \hat{\omega}_{l'}}. \quad (2.194)$$

2.10.5 The ML-WENO Reconstruction Error

In this subsection, we analyze the accuracy of the new multi-level weighting scheme. Consider the set containing indices of stencils $l \in \mathcal{L} = \{0, 1, 2, \dots, L\}$. Specifically, we denote the set of indices of stencils of size $s \times t$ as $\mathcal{L}_{s,t} \subset \mathcal{L}$. We assume the

mesh resolution is sufficiently fine such that at least one smooth stencil exists in the presence of shocks. Accordingly, we define two index sets: one containing the stencils identified as smooth, and the other containing those that exhibit discontinuities as

$$\begin{aligned}\text{Smooth} &= \{l : u \text{ is smooth on } \mathcal{S}_l\}, \\ \text{Jump} &= \{l : u \text{ has a jump on } \mathcal{S}_l\},\end{aligned}\tag{2.195}$$

where $\text{Smooth} \cup \text{Jump} = \mathcal{L}$ and $\text{Smooth} \cap \text{Jump} = \emptyset$. Moreover, we assume $\text{Smooth} \neq \emptyset$. We show that the reconstruction is accurate with respect to the target cell E_0 to order

$$r_{\max} = \max\{r : \text{Smooth} \cap \mathcal{L}_{r,r} \neq \emptyset\}.\tag{2.196}$$

Figure 2.19 illustrates a (3,2,1) combination of stencils in the presence of two shocks. In this example, the set containing indices of smooth stencils is $\text{Smooth} = \{0, 1\}$, indicating that u on stencils $\mathcal{S}_0$ and $\mathcal{S}_1$ does not have a jump. Consequently, we expect the accuracy of the reconstruction is $r_{\max} = \text{Smooth} \cap \mathcal{L}_{2,2} = 2$.

We follow the estimation of reconstruction error in Arbogast et al. (2024). We start by estimating the error of the nonlinear scaling (2.192) associated with some stencils $\mathcal{S}_l$ for some $m > 0$.

$$\hat{\omega}_l = \frac{\omega_l}{(\sigma_l + \epsilon h_0^2)^m}.\tag{2.197}$$

We estimate the reconstruction error under two distinct situations:

- $l \in \text{Smooth}$, the smoothness indicator $\sigma_l = Ch^2 + \mathcal{O}(h^3)$;
- $l \in \text{Jump}$, the smoothness indicator $\sigma_l = \Theta(1)$.

We employ the asymptotic estimation result from Olver (1997). Assuming $n \geq m$, $a > 0$, and $b > 0$, then

$$\begin{aligned}\frac{a}{bh^m + \mathcal{O}(h^n)} &= \frac{ah^{-m}}{b}(1 + \mathcal{O}(h^{n-m})), \\ \frac{a}{bh^{-n} + \mathcal{O}(h^{-m})} &= \frac{ah^n}{b}(1 + \mathcal{O}(h^{n-m})).\end{aligned}\tag{2.198}$$

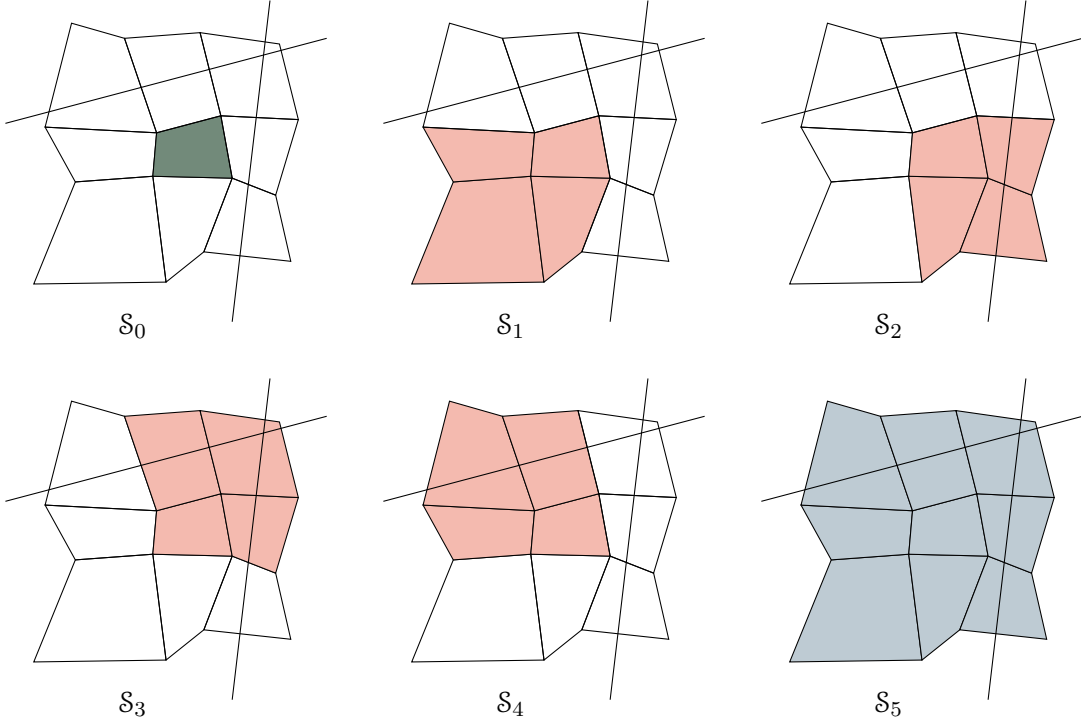


Figure 2.19: An illustration of a (3,2,1) multi-level stencils combination on a logically rectangular quadrilateral mesh with two shock present.

For the smooth stencil $\mathcal{S}_l$, $l \in \text{Smooth}$

$$\begin{aligned}
 \hat{\omega}_l &= \frac{\omega_l}{(\sigma_l + \epsilon h_0^2)^m} = \frac{\omega_l}{((C + \epsilon)h_0^2 + \mathcal{O}(h^3))^m} \\
 &= \omega_l \left(\frac{h_0^{-2}}{C + \epsilon} (1 + \mathcal{O}(h)) \right)^m \\
 &= \frac{\omega_l}{(D + \epsilon)^m} h_0^{-2m} (1 + \mathcal{O}(h)).
 \end{aligned} \tag{2.199}$$

In conclusion, we estimate the nonlinear scaling as

$$\hat{\omega}_l = \begin{cases} \frac{\omega_l}{(C + \epsilon)^m} h_0^{-2m} (1 + \mathcal{O}(h)), & \text{if } l \in \text{Smooth}, \\ \Theta(1), & \text{if } l \in \text{Jump}. \end{cases} \tag{2.200}$$

Then we estimate the error for the normalized nonlinear weighting (2.194). We expand the sum of nonlinear scaling as

$$\sum_l \hat{\omega}_l = \sum_r \sum_{\substack{l \in \\ \text{Smooth} \cap \mathcal{L}_{r,r}}} \hat{\omega}_l + \sum_{l \in \text{Jump}} \hat{\omega}_l. \tag{2.201}$$

We estimate the smooth part of the nonlinear weighting as

$$\sum_r \sum_{\substack{l \in \text{Smooth} \\ \text{Smooth} \cap \mathcal{L}_{r,r}}} \hat{\omega}_l = \sum_r \sum_{\substack{l \in \text{Smooth} \\ \text{Smooth} \cap \mathcal{L}_{r,r}}} \frac{\omega_l}{(C + \epsilon)^m} h_0^{-2(ar+\eta)} (1 + \mathcal{O}(h)). \quad (2.202)$$

Assume $h < 1$, we keep the largest $ar + \eta(r)$ number as our estimator

$$\begin{aligned} \sum_r \sum_{\substack{l \in \text{Smooth} \\ \text{Smooth} \cap \mathcal{L}_{r,r}}} \hat{\omega}_l &= \sum_{\substack{l \in \text{Smooth} \\ \text{Smooth} \cap \mathcal{L}_{r_{\max}, r_{\max}}}} \frac{\omega_l}{(C + \epsilon)^{ar_{\max} + \eta(r_{\max})}} h_0^{-2(ar_{\max} + \eta(r_{\max}))} (1 + \mathcal{O}(h)) \\ &\quad + \Theta(h^{-2(ar+\eta(r))}) \\ &= \sum_{\substack{l \in \text{Smooth} \\ \text{Smooth} \cap \mathcal{L}_{r_{\max}, r_{\max}}}} \frac{\omega_l}{(C + \epsilon)^{ar_{\max} + \eta(r_{\max})}} h_0^{-2(ar_{\max} + \eta(r_{\max}))} \\ &\quad + \mathcal{O}(h^{1-2(ar_{\max} + \eta(r_{\max}))}). \end{aligned} \quad (2.203)$$

later, we denote the set $\text{Smooth} \cap \mathcal{L}_{r,r}$ as Smooth_r for simplicity. The overall accuracy estimation of the nonlinear weighting (2.194) is presented as

- $l \in \text{Smooth}$

$$\tilde{\omega}_l = \frac{\hat{\omega}_l}{\sum_{l'} \hat{\omega}_{l'}} = \frac{\omega_l}{\sum_{l' \in \text{Smooth}_r} \omega_{l'}} h^{2[a(r_{\max}-r) + \eta(r_{\max}) - \eta(r)]} (1 + \mathcal{O}(h)); \quad (2.204)$$

- $l \in \text{Jump}$

$$\tilde{\omega}_l = \frac{\hat{\omega}_l}{\sum_{l'} \hat{\omega}_{l'}} = \Theta(h^{2[a(r_{\max}) + \eta(r_{\max})]}). \quad (2.205)$$

Now we can estimate the reconstruction error as

$$\begin{aligned} |u(\mathbf{x}) - \mathcal{R}(\mathbf{x})| &= \left| \sum_l \tilde{\omega}_l (u(\mathbf{x}) - Q_l(\mathbf{x})) \right| \\ &\leq \sum_{l \in \text{Smooth}} \tilde{\omega}_l |u(\mathbf{x}) - Q_l(\mathbf{x})| + \sum_{l \in \text{Jump}} \tilde{\omega}_l |u(\mathbf{x}) - Q_l(\mathbf{x})| \\ &\leq \sum_r \sum_{l \in \text{Smooth}_r} \Theta(h^{2[a(r_{\max}-r) + \eta(r_{\max}) - \eta(r)]}) \mathcal{O}(h^r) \\ &\quad + \sum_{l \in \text{Jump}} \Theta(h^{2(ar_{\max} + \eta(r_{\max}))}) \mathcal{O}(1) \\ &= \mathcal{O}(h^{r_{\max}}) \end{aligned} \quad (2.206)$$

Combining everything above and (2.191), we arrive at the formal error estimate of the reconstruction.

Lemma 2.14. *Let $\mathcal{R}(\mathbf{x})$ be the reconstruction. Assuming a quasi-uniform mesh, $h_0 = \Theta(h)$, there exists a constant $C > 0$ such that for any $\mathbf{x} \in E_0$,*

$$|u(\mathbf{x}) - \mathcal{R}(\mathbf{x})| \leq Ch^{r_{\max}}, \quad (2.207)$$

where $r_{\max}$ is defined by (2.196).

2.10.6 Time stepping

In this subsection, we briefly discuss some suitable time integration techniques. We focus on explicit schemes mainly because the phase package cannot be accurately coupled over long time intervals.

While the forward Euler method is sufficient for stability analysis, it only provides first-order accuracy. Therefore, we employ the strong-stability preservation (SSP) scheme introduced in Gottlieb et al. (2001). This scheme achieves higher order time accuracy while theoretically preserving the stability properties of the forward Euler method.

To begin with, the first-order forward Euler method is written as

$$u^{n+1} = u^n + \Delta t \tilde{\mathbf{F}}(u^n), \quad (2.208)$$

where $\tilde{\mathbf{F}}(u^n)$ represents the numerical integration of the numerical flux $\mathbf{F}(u^n)$ in Equation (2.177). A multi-stage explicit SSP Runge-Kutta method is

$$\begin{aligned} u^0 &= u^n, \\ u^{(i)} &= \sum_{j=0}^{i-1} \alpha_{i,j} u^{(j)} + \Delta t \beta_{i,j} \tilde{\mathbf{F}}(u^{(j)}), \quad 1 \leq i \leq m \\ u^{n+1} &= u^m, \end{aligned} \quad (2.209)$$

where $\sum_j^{i-1} \alpha_{i,j} = 1$ for consistency. To be consistent with the MFEM solver's second-order accuracy in velocity, we omit further discussion of time-integration schemes

beyond third-order accuracy. The second- and third-order explicit SSP Runge-Kutta schemes can be expressed in the multi-stage form (2.209) as, for SSP2,

$$\begin{aligned} u^0 &= u^n, \\ u^{(1)} &= u^{(0)} + \Delta t \tilde{\mathbf{F}}(u^{(0)}), \\ u^{n+1} &= u^{(0)} + \frac{1}{2} \Delta t \tilde{\mathbf{F}}(u^{(0)}) + \frac{1}{2} \Delta t \tilde{\mathbf{F}}(u^{(1)}), \end{aligned} \tag{2.210}$$

and, for SSP3,

$$\begin{aligned} u^0 &= u^n, \\ u^{(1)} &= u^{(0)} + \Delta t \tilde{\mathbf{F}}(u^{(0)}), \\ u^{(2)} &= \frac{3}{4} u^n + \frac{1}{4} u^{(1)} + \frac{1}{4} \Delta t \tilde{\mathbf{F}}(u^{(1)}), \\ u^{n+1} &= \frac{1}{3} u^{(0)} + \frac{2}{3} u^{(2)} + \frac{2}{3} \Delta t \tilde{\mathbf{F}}(u^{(2)}). \end{aligned} \tag{2.211}$$

2.11 Handling Boundary Conditions

We couple MFEM and FVM solvers on a single mesh in our simulation. Therefore, accurate and compatible boundary conditions need to be assigned accordingly. However, it is usually difficult to manage boundary conditions for higher order finite volume and finite difference methods, which usually require wide stencils.

Some methods address this difficulty by using ghost cells or ghost points outside the computational domain, allowing the use of interior-like stencils near boundaries. However, the extrapolation or estimation of the manufactured values of ghost cells or ghost points are not straightforward. A notable method, the inverse Lax-Wendroff procedure introduced in Tan and Shu (2010), iteratively substitute normal derivatives of the solution with tangential and time derivatives using the PDE relation to impose more precise values for the ghost cells or ghost points.

We focus on utilizing the flexibility of the ML-WENO reconstruction to tackle the difficulties in a direct way without the use of ghost cells. This approach is independent of the complexity of the governing partial differential equations and intricacies

of the geometry of the boundary. Similar discussion using the adaptive order reconstruction can be found in Semplice and Visconti (2020) and Semplice et al. (2023).

In Finite Volume Methods, we must use the boundary condition to determine the numerical flux on the boundary. To assign proper boundary conditions to a FVM discretization, it is necessary to first identify whether the flow is inflow or outflow first. Let u_B denote the value of u on the boundary. We classify the types of boundary conditions based on the magnitude and direction of the numerical flux $\mathbf{f}(u_B) \cdot \boldsymbol{\nu}$.

- If $\mathbf{f}(u_B) \cdot \boldsymbol{\nu} > 0$, it is classified as an *outflow* boundary, and no fixed boundary condition should be assigned. Instead a *free outflow* boundary condition is used, where the numerical flux is simply given by $\mathbf{f}(u_B) \cdot \boldsymbol{\nu}$. The outflow boundary may lead to degradation in the accuracy of the numerical solution, as high-order stencils that would extend beyond the computational domain must be truncated. ML-WENO offers the flexibility to add stencils of the desired size that span back into the domain, thereby preserving accuracy near outflow boundaries.
- If $\mathbf{f}(u_B) \cdot \boldsymbol{\nu} < 0$, it is classified as an *inflow* boundary. We can understand it as prescribing the inflow flux $\mathbf{f}_B$ or fixing the boundary value u_B (a Dirichlet boundary condition). In the inflow case, discontinuous shock may enter the domain, requiring a swift response inside the domain to align with the specified Dirichlet value. To accommodate such potential discontinuities, we can incorporate an extra constant stencil polynomial to WENO reconstruction near the inflow boundary.
- If $\mathbf{f}(u_B) \cdot \boldsymbol{\nu} = 0$, it is usually referred to as a *noflow* boundary. No additional treatment on the boundary is required, as the value is fixed at zero.

In the following subsections, we present two examples. The first example illustrates how additional higher order stencils affect reconstruction order. The second

address an inflow Dirichlet boundary condition that generates an incoming shock wave.

2.11.1 Example on additional stencils reinforced at the boundary

We use logically rectangular meshes, with vertices randomly perturbed in x and y directions within a range of $[-0.15, 0.15]$ times the unperturbed mesh spacing h . A full example mesh is depicted in Figure 2.2.

Let $u(x, y)$ be an arbitrary function defined within the domain $\Omega = [0, 1]^2$. We take

$$u(x, y) = \begin{cases} \sin(x) \cos(y) & x \leq 0.5, \\ \sin\left(\frac{(x + 0.3)\pi}{2}\right)^6 \cos\left(\frac{(y - 0.6)\pi}{2}\right)^6 + 0.5 & x > 0.5. \end{cases} \quad (2.212)$$

We consider the standard (5,3) ML-WENO reconstruction for a cell $E_{i,j}$ located far away from boundaries as shown in Figure 2.20. This reconstruction consists of two different stencils with different approximation accuracy: a 5×5 large stencil providing fifth-order accuracy and four 3×3 small stencils providing third-order accuracy. However, when the cell $E_{i,j}$ located within the two-cell distance from any boundary, the large stencil becomes unavailable, leading to a degeneracy in the order of accuracy near the boundary. In this case, ML-WENO grants flexibility of associating an additional large stencil to the cells within the two-cell distance from boundary.

Figure 2.21 illustrates a case where a fifth-order stencil centered at cell $E_{i,j}$ can be used in the ML-WENO reconstruction of different target cells: interior cell (red), cells located one cell away from the boundary (green) and cells on the boundary (yellow).

We define the effective polynomial degree of the reconstructions for each cell as

$$p_{\text{eff}} = \sum_l \tilde{\omega}_l r_l - 1. \quad (2.213)$$

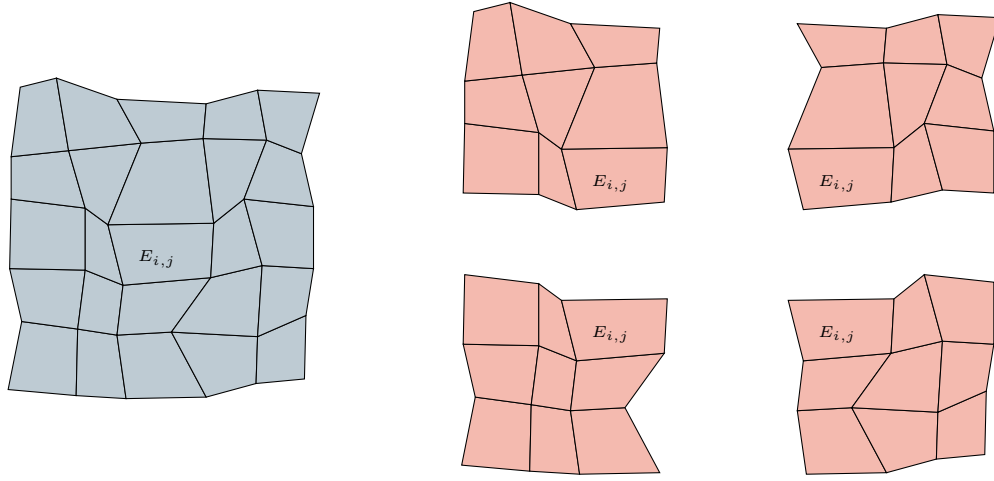


Figure 2.20: An example of a standard (5,3) stencils combination on a logically rectangular quadrilateral mesh.

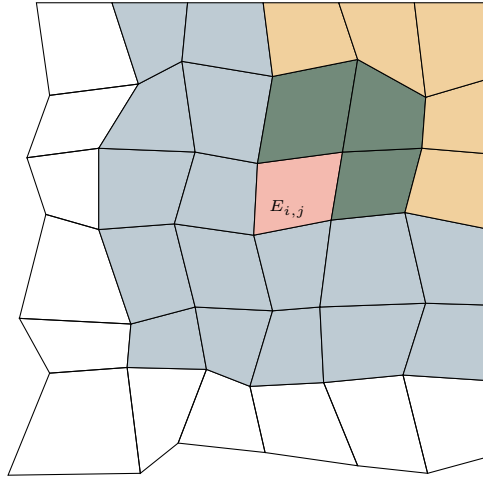


Figure 2.21: An illustration of different cells using one fifth-order stencil to avoid accuracy degeneracy.

In Figure 2.23, we see good approximation (polynomial degree 4) over the middle of the domain except two layers of cells around the shock. However, the reconstruction drops to polynomial degree 3, within the distance of two cells from the boundary. With the help of adding additional large stencils as shown in Figure 2.20, we can achieve good approximation (polynomial degree 4) at the top right corner of the boundary. Figure 2.22 illustrates the reconstructed solution on the 20×20 randomly

distorted logically rectangular mesh.

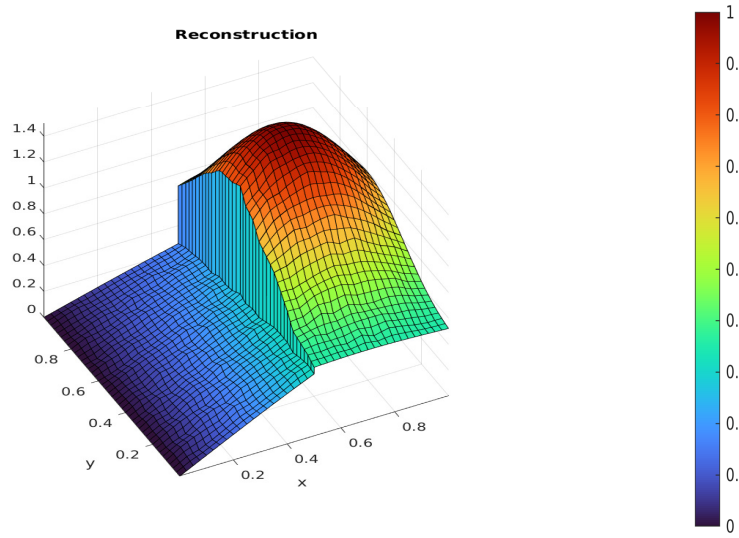


Figure 2.22: The reconstructed solution on the 20×20 randomly distorted logically rectangular mesh.

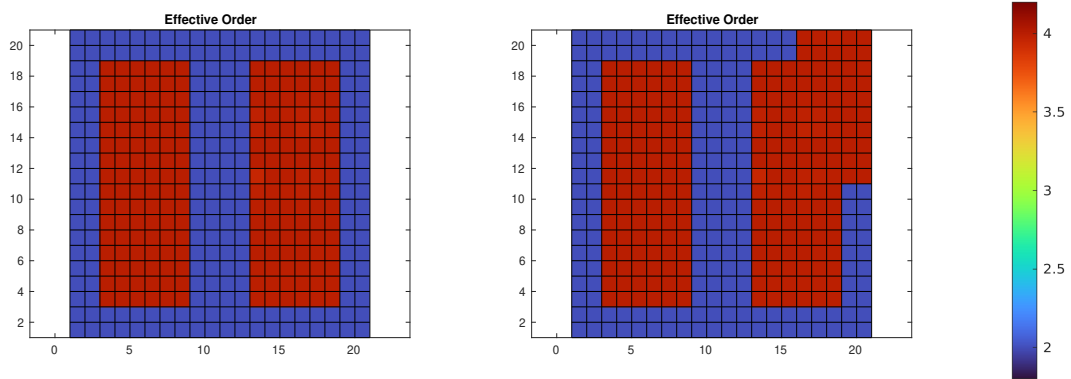


Figure 2.23: Effective polynomial degree with and without some additional fifth-order stencils added near the top right boundary.

2.11.2 Stabilization of a inflow boundary

We present another example demonstrating that adding a “constant” level on the boundary stabilize problems with complex inflow boundary condition. For this case, we consider a Burgers-like equation $u_t + u^3 u_x = 0$ with a fourth order flux

$\mathbf{f}(u) = (u^4/4, 0)$ in the domain $[0, 1]^2$. We impose Dirichlet boundary condition on the left boundary as

$$u_D(0, y, t) = \begin{cases} \sin^2(2\pi y), & y \leq 0.25, y \geq 0.75, \\ 1, & 0.25 < y < 0.75. \end{cases} \quad (2.214)$$

Free outflow boundary conditions are assigned to the remaining boundaries. We consider a standard $(3, 2)$ reconstruction modified on the inflow boundary $x = 0$ we consider a $(3, 2, 1)$ multi-level stencils combination as shown in Figure 2.18. We use a rectangular mesh with 80×80 cells and second-order Runge-Kutta time integrator (2.210). Figure 2.24 illustrates the shock wave traveling into the domain with a sharp profile. A slight overshoot can be observed at time 0.125, which is quickly stabilized. Without the additional “constant” level, the inflow rapidly blows up shortly after entering the computational domain. Higher-order simulation results can be found in Arbogast et al. (2024).

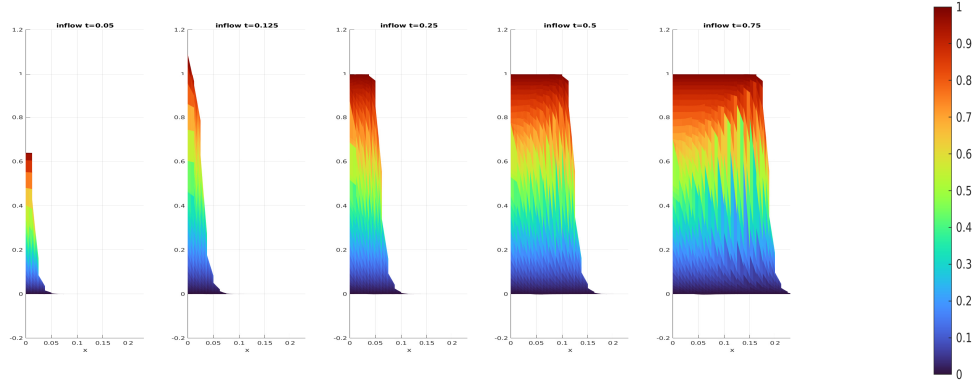


Figure 2.24: A test case demonstrating inflow stabilization using a constant stencil at the inflow boundary on a 80×80 rectangular domain.

2.12 Numerical Test

We test our ML-WENO algorithm with a Riemann shock and rarefaction. Let $\mathbf{f}(u) = (u^2/2, 0)$ be the Burgers flux function. In this example, we take the initial condition $u_0(x, y) = 1$ in the strip $0.5 < x < 1.5$ and 0 elsewhere within the

computational domain $\Omega = [0, 3] \times [0, 1]$. We assign zero flux boundary condition on the two sides $y = 0$ and $y = 1$.

The true solution is

$$u(x, y, t) = \begin{cases} 0, & x < 0.5, x \geq 0.5t + 1.5, \\ (x - 0.5)/t, & 0.5 \leq x < t + 0.5, \\ 1, & t + 0.5 \leq x < 0.5t + 1.5. \end{cases} \quad (2.215)$$

We forward march to the time = 2.0, when the trailing rarefaction reaches the leading shock. For simplification, we test the problem on a 180×60 rectangular mesh. We compute the solution to time 2 using the standard SSP3 Runge-Kutta time stepping scheme, with time step $\Delta t = 0.2h$. In Figure 2.25, we see nonoscillatory and sharp solution at time $t = 1$ and $t = 2$.

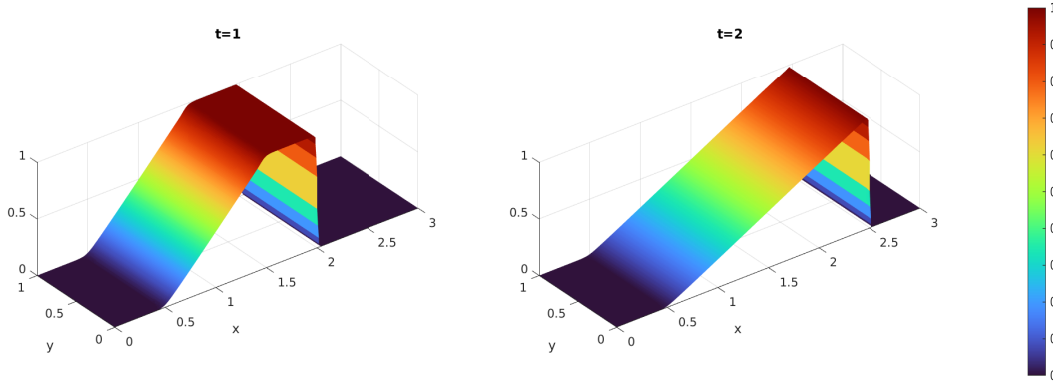


Figure 2.25: The reconstructed solution on the 180×60 rectangular mesh at times 1.0 and 2.0. (The rarefaction and shock meet at time 2.0.)

Chapter 3: Code Implementation

In this project, all numerical experiments and simulations are implemented in C++/C, with basic iterative solvers and simple parallel data management facilitated by PETSc Balay et al. (2025a). In this section, we describe the implementation of a coupled FEM-FVM code, designed to preserve generality and support future optimization and extensibility.

We first present a general implementation for an unstructured mesh, followed by a detailed discussion of a specific application involving a logically rectangular mesh. All applications are considered in a two-dimensional setting.

3.1 Geometry

A fundamental step in developing a FEM or FVM code is the indexing of geometric entities. The mesh index data structure implemented in the code is inspired by the classical viewpoint of Boundary Representation (BREP), originally introduced by Baumgart (1975). In the two-dimensional case, each element is bounded by a set of edges, and each edge is defined by a set of vertices. We begin by introducing the following notations for global geometric objects:

$$\begin{aligned} \text{Vertex } V_i, \quad i \in ID_V, \\ \text{Edge } E_i, \quad i \in ID_E, \\ \text{Element (i.e. Face) } F_i, \quad i \in ID_F, \end{aligned} \tag{3.1}$$

where ID_V , ID_E and ID_F denote countable sets containing all unique global indices for vertices, edges, and elements (or cells, i.e., the faces), respectively. Superscripts are used to indicate subsets of these global index sets. For example, $ID_V^{E_i} \subset ID_V$ represents the set of global vertex indices associated with edge E_i , which is a subset of the global vertex index set.

We again present the following notations for local geometric entities:

$$\begin{aligned}
\text{Vertex} \quad & v_i, \quad i \in id_v, \\
\text{Edge} \quad & e_i, \quad i \in id_e, \\
\text{Element (i.e. Face)} \quad & f_i, \quad i \in id_f,
\end{aligned} \tag{3.2}$$

where id_v , id_e and id_c denote countable sets containing local index for vertices, edges and elements corresponding to a given geometrical object. Superscripts are used to indicate the target geometrical object. For example, $id_v^{E_i} = \{0, 1\}$ represents the local index of the two vertices bounding the edge E_i .

We establish a one-to-one mapping between local and global indices through a local-to-global map, defined as

$$f : id \rightarrow ID. \tag{3.3}$$

In practice, it is often unnecessary to explicitly define a local-to-global mapping. On the other hand, for each local array containing global indices, the array indices naturally represent the local index set. This array-based representation enables the implicit construction of a global-to-local mapping within each geometric entity.

3.1.1 General Unstructured Mesh

In both FEM and FVM solvers, an element object F_i (mesh cell or “faces”) serves as the fundamental geometry entity. These elements will be assumed to be strictly convex polygons, tessellating space, and sharing complete edges. we start with a brief analysis of the information each face should access from its local perspective. Each element F_i should have the access to the following geometric objects:

- The adjacent elements connected by edges;
- The adjacent elements connected with vertices, but not sharing an edge;
- The vertices of the polygonal element;

- The edges that bound this element.

At the same time, each edge E_j should have access to:

- Two adjacent elements that share this edge;
- Two vertices that bound this edge.

For simplicity, we restrict our discussion to quadrilaterals in the following discussions. In FEM and FVM computations, we assume an orientable mesh, where “clockwise” and “counterclockwise” orientations can be consistently defined. This allows the use of a half-edge data structure to systematically manage edge directions.




Figure 3.1: An illustration of the half-edge data structure for a quadrilateral.

Figure 3.1 illustrates a simple half-edge data structure applied to a quadrilateral mesh. For each element F_i , the associated vertex V_i references the outgoing link l_i that points to the next vertex V_{i+} , while the incoming link l_{i-} , which points to V_i is not directly referenced. Consequently, a normal “direction” can be determined from the perspective of each element object F_i in accordance to the direction of links.

3.2 Logically Rectangular Mesh

Mesh generation is not the primary focus of this project; therefore, we restrict to a logically rectangular mesh and adopt a simple approach to generating a

quadrilateral mesh. The quadrilateral mesh is generated by randomly distorting each interior vertex coordinates of a uniform rectangular mesh. However, the indexing of geometrical entities remain unchanged despite the vertex perturbation.

In our implementation, all indices are represented using Cartesian coordinates. This allows the local-to-global mapping of geometric entities to be established easily through linear functions. All geometric entities can be indexed using Cartesian coordinates straightforwardly. For a mesh with $M \times N$ cells, the total number of vertices is $(M + 1) \times (N + 1)$, while the total number of edges is $M \times (N + 1) + (M + 1) \times N$. Horizontal edges are indexed first, and vertical edges are indexed sequentially starting from the offset $M \times (N + 1)$.

Before we delve into the indexing conventions of this type of mesh, we introduce a reshape function that facilitates communication between N -dimensional data and its one-dimensional representation.

3.2.1 Reshape of N -dimensional Data

The natural representation of a 2D Cartesian index is a pair (i, j) . In practice, it is often reshaped into a 1D array for more efficient computational handling. We introduce a general reshape function that projects N -dimensional data to a one-dimensional data. This reshape function can also be used for tensor data, e.g., The Jiang-Shu smoothness indicators (2.186).

Consider a bijective map between N -dimensional data and its one-dimensional data representation as

$$i \leftrightarrow (i_0, i_1, \dots, i_{N-1}). \quad (3.4)$$

Algorithm 3 illustrates a simple implementation of the reshape function. The inverse operation, reshaping one-dimensional data back into N -dimensional form, can be achieved using modulo and integer division operations.

Throughout this work, we use these two index representations interchangeably.

Algorithm 3 Reshape N -dimensional data

Consider a N -dimensional array of size $\{n_0 \times n_1 \times \dots \times n_{N-1}\}$.

Let $I = 0$ be the variable storing the output, and $a = 1$ be the intermediate multiplier.

Consider an input N -dimensional index $\{i_0, i_1, \dots, i_{N-1}\}$.

- 1: **for** rank $r = 0, 1, \dots, N - 1$ **do**
 - 2: $I = I + i_r \times a$.
 - 3: $a = a \times n_r$.
 - 4: **end for**
-

To emphasize the relation between N -dimensional and its one-dimensional representation, we introduce the following notation as

$$i(i_0, i_1, \dots, i_{N-1})_{n_0, n_1, \dots, n_{N-1}}, \quad (3.5)$$

where i denotes the mapping from the N -dimensional data to the one-dimensional data, while $(i_0, i_1, \dots, i_{N-1})$ is the corresponding N -dimensional index. The N -dimensional quantities $n_0, n_1, \dots, n_{N-1}$ represent the respective sizes along each dimension of the N -dimensional array.

3.2.2 Local Vertex Representation

We now represent the local vertex index with the new notation (3.5). For any vertex, we can represent its local index as

$$a(a_0, a_1)_{2,2}, \quad (3.6)$$

where $a_0, a_1 \in \{0, 1\}$. We can link to the next point simply by adding 1 to the one-dimensional index under the understanding of modulo as

$$b \equiv a + 1 \pmod{4}, \quad (3.7)$$

which is a simple half-edge data representation. The direction is naturally defined by this addition operation.

3.2.3 Local to Global Index Convention

Recall that local vertices and edges are indexed starting from bottom left corner, as illustrated in Figure 2.1. We now define the local to global index mapping with the help of the new notation (3.5). Consider any local vertex v_i associated to a quadrilateral element $F_{I(I_0, I_1)_{M, N}}$ with the local index

$$id_v \ni i(i_0, i_1)_{2,2}. \quad (3.8)$$

We find the corresponding global index with ease as

$$ID_V \ni I(I_0 + i_0, I_1 + i_1)_{M+1, N+1}. \quad (3.9)$$

We continue our discussion the local-to-global mapping for vertical and horizontal edges. Consider edge e_i defined by the vertex $id_v \ni i(i_0, i_1)$ and its half-edge link l_i :

- Global index of the horizontal edge is

$$ID_E \ni I(I_0, I_1 + i_1)_{M, N+1}; \quad (3.10)$$

- Global index of the vertical edge is

$$ID_E \ni I(I_0 + i_0, I_1)_{M+1, N} + M \times (N + 1). \quad (3.11)$$

3.3 Dofs and MFEM assembly

In FEM and FVM computations, it is necessary to associate geometrical entities with degrees of freedom (dofs). For FVM schemes, the dofs associated with edge fluxes are straightforward. However, in MFEM, the treatment of dofs requires more carefully handling, particularly for those located on the boundary. Following the approach of Hughes (1987), we employ three data processing arrays: ID, IEN and LM arrays. We begin by the introduction of these three arrays as:

- IEN array,

$$\text{IEN}(a, e) = A, \quad (3.12)$$

where a is the local dof index, e is the global element number and A is the global dof index;

- ID array,

$$\text{ID}(A) = \begin{cases} P, & A \notin \text{Essen}, \\ 0, & A \in \text{Essen}, \end{cases} \quad (3.13)$$

where P is the position used in global matrix assembly, and Essen denotes the boundary assigned with essential boundary condition;

- LM array,

$$\text{LM} = \text{ID}(\text{IEN}(a, e)). \quad (3.14)$$

In actual code implementation, we create LM array by screening all dofs prior to computation, while IEN and ID array are not stored explicitly.

3.3.1 MFEM Indexing Example

For a first order $H(\text{div})$ conforming element, the velocity dofs are primarily associated with edges, similar to FVM, making them relatively intuitive to understand and implement. Therefore, we provide a detailed description of how the velocity dofs of a modified Bernardi-Raugel element is implemented using ID, IEN, and LM arrays, where both vertex dofs and edge dofs are present.




Figure 3.2: An exhibition of velocity dofs associated with a modified Bernardi-Raugel element.

Figure 3.2 illustrates the dof layout in a Bernardi-Raugel element: two dofs (the x - and y -components) are associated with each vertex node while one normal flux dof is associated with each edge node. The global dofs are ordered as follows: x - and y -component of the vertex dofs, followed by flux dofs on horizontal edges and finally flux dofs on vertical edges.

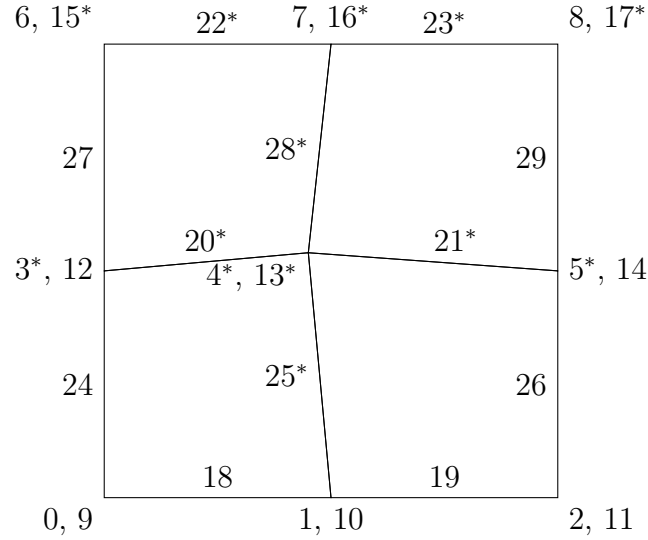


Figure 3.3: An exhibition of velocity dofs associated with Bernardi-Raugel on a 4×4 mesh.

Figure 3.3 shows a simple 4×4 mesh with corresponding index associated with each velocity dof marked. The total dof counts equal to $2 \times (3 \times 3) + 2 \times 3 + 3 \times 2 = 30$. For example, we assume the following boundary conditions are prescribed.

- Bottom Edge:
 - x -component is fixed with zero;
 - y -component is fixed with a constant value;
 - normal flux is fixed with a constant value.
- Left and Right side Edges:

- x-component is fixed with zero;
 - y-component is free, given natural boundary condition (zero stress);
 - normal flux is fixed with a zero flux.
- Top Edge:
 - x-component fixed with zero;
 - y-component is free, given natural boundary condition (zero stress);
 - normal flux is free.

In Figure 3.3, we mark all the dofs that are not prescribed, i.e., will be determined by solving the linear system, with a superscript *. These *free* dofs consist of interior dofs as well as boundary dofs subject to natural boundary conditions. We can construct an ID array accordingly in Table 3.1. As a result, the reduced linear

P	0	1	2	3	4	5	6	7	8	9	10	11
A	3	4	4	13	14	16	20	21	22	23	25	28

Table 3.1: ID array generated to the dofs in Figure 3.3.

system excluding prescribed velocity dofs is 12×12 , which is the size of the ID array in Table 3.1.

Works Cited

T. Arbogast, M. A. Hesse, and A. L. Taicher. Mixed methods for two-phase Darcy-Stokes mixtures of partially melted materials with regions of zero porosity. *SIAM J. Sci. Comput.*, 39(2):B375–B402, 2017. DOI 10.1137/16M1091095.

Todd Arbogast and Jerry L. Bona. *Functional Analysis for the Applied Mathematician*. Chapman & Hall, 2025.

Todd Arbogast and Maicon R. Correa. Two families of $H(\text{div})$ mixed finite elements on quadrilaterals of minimal dimension. *SIAM Journal on Numerical Analysis*, 54(6):3332–3356, 2016. doi: 10.1137/15M1013705. URL <https://doi.org/10.1137/15M1013705>.

Todd Arbogast and Mary F. Wheeler. A family of rectangular mixed elements with a continuous flux for second order elliptic problems. *SIAM Journal on Numerical Analysis*, 42(5):1914–1931, 2005. doi: 10.1137/S0036142903435247. URL <https://doi.org/10.1137/S0036142903435247>.

Todd Arbogast, Zhen Tao, and Chuning Wang. Direct serendipity and mixed finite elements on convex quadrilaterals. *Numerische Mathematik*, 150:929–974, 2022.

Todd Arbogast, Chieh-Sen Huang, and Chenyu Tian. A finite volume multilevel weno scheme for multidimensional scalar conservation laws. *Comput. Methods Appl. Mech. Engrg.*, 421, 2024.

Todd Arbogast, Chieh-Sen Huang, Chenyu Tian, and Gabirel M.Gray. An efficient and accurate approximation to the classic polynomial smoothness indicator. *Submitted.*, 2025.

K.J. Arrow, L. Hurwicz, and H. Uzawa. *Studies in Linear and Nonlinear Programming*. Standford University Press, 1958.

Satish Balay, Shrirang Abhyankar, Mark F. Adams, Steven Benson, Jed Brown, Peter Brune, Kris Buschelman, Emil Constantinescu, Lisandro Dalcin, Alp Dener, Victor Eijkhout, Jacob Faibussowitsch, William D. Gropp, Václav Hapla, Tobin Isaac, Pierre Jolivet, Dmitry Karpeev, Dinesh Kaushik, Matthew G. Knepley, Fande Kong, Scott Kruger, Dave A. May, Lois Curfman McInnes, Richard Tran Mills, Lawrence Mitchell, Todd Munson, Jose E. Roman, Karl Rupp, Patrick Sanan, Jason Sarich, Barry F. Smith, Hansol Suh, Stefano Zampini, Hong Zhang, Hong Zhang, and Junchao Zhang. PETSc/TAO users manual. Technical Report ANL-21/39 - Revision 3.23, Argonne National Laboratory, 2025a.

Satish Balay, Shrirang Abhyankar, Mark F. Adams, Steven Benson, Jed Brown, Peter Brune, Kris Buschelman, Emil M. Constantinescu, Lisandro Dalcin, Alp Dener, Victor Eijkhout, Jacob Faibussowitsch, William D. Gropp, Václav Hapla, Tobin Isaac, Pierre Jolivet, Dmitry Karpeev, Dinesh Kaushik, Matthew G. Knepley, Fande Kong, Scott Kruger, Dave A. May, Lois Curfman McInnes, Richard Tran Mills, Lawrence Mitchell, Todd Munson, Jose E. Roman, Karl Rupp, Patrick Sanan, Jason Sarich, Barry F. Smith, Stefano Zampini, Hong Zhang, Hong Zhang, and Junchao Zhang. PETSc Web page. <https://petsc.org/>, 2025b. URL <https://petsc.org/>.

Bruce G. Baumgart. A polyhedron representation for computer vision. In *Proceedings of the May 19-22, 1975, National Computer Conference and Exposition, AFIPS '75*, page 589–596, New York, NY, USA, 1975. Association for Computing Machinery. ISBN 9781450379199. doi: 10.1145/1499949.1500071. URL <https://doi.org/10.1145/1499949.1500071>.

Michele Benzi, Gene H. Golub, and Jörg Liesen. Numerical solution of saddle point problems. *Acta Numerica*, 14:1–137, 2005. doi: 10.1017/S0962492904000212.

David Bercovici, Yanick Ricard, and Gerald Schubert. A two-phase model for compaction and damage 1. general theory. *Journal of Geophysical Research*, 106:8887–8906, 2001.

Christine Bernardi and Genevieve Raugel. Analysis of some finite elements for the Stokes problem. *Math. of Comput.*, 44:71–79, 1985.

Ray Bowen. Incompressible porous media models by use of the theory of mixtures. *Int. J. Engng Sci.*, 18:1129–1148, 1980.

James H. Bramble, Joseph E. Pasciak, Apostol T, and Vassilev. Analysis of the inexact uzawa algorithm for saddle point problems. *SIAM. J. Numer. Anal.*, 34:1072–1092, 1997.

J.H. Bramble and S. R. Hilbert. Estimation of linear functionals on Sobolev spaces with application to Fourier transform and spline interpolation. *SIAM J. Numer. Anal.*, 7(1):112–124, 1970. doi: 10.1137/0707006.

Franco Brezzi, Jim Douglas Jr., and L. D. Marini. Two families of mixed finite element for second order elliptic problems. *Numerische Mathematik*, 47:217–235, 1985.

J. A. Campbell. Elements of classical thermodynamics for advanced students of physics. *Journal of the American Chemical Society*, 80(14):3803–3803, 1958. doi: 10.1021/ja01547a094. URL <https://doi.org/10.1021/ja01547a094>.

Philippe G. Ciarlet. *The Finite Element Method for Elliptic Problems*. Society for Industrial and Applied Mathematics, 2002. doi: 10.1137/1.9780898719208. URL <https://epubs.siam.org/doi/abs/10.1137/1.9780898719208>.

Donald Drew and Lee Segel. Averaged equations for two-phase flows. *Studies in Applied Mathematics*, page 3, 1971.

Todd Dupont and Ridgway Scott. Polynomial approximation of functions in Sobolev spaces. *Mathematics of Computation*, 34(150):441–463, 1980a.

Todd Dupont and Ridgway Scott. Polynomial approximation of functions in Sobolev spaces. *Mathematics of Computation*, 34(150):441–463, 1980b. ISSN 00255718, 10886842. URL <http://www.jstor.org/stable/2006095>.

Howard C. Elman and Gene H. Golub. Inexact and preconditioned uzawa algorithms for saddle point problems. *SIAM. J. Numer. Anal.*, 31:1645–1661, 1994.

Michel Fortin. Old and new finite elements for incompressible flows. *International Journal for Numerical Methods in Fluids*, 1:347–364, 1981. URL <https://api.semanticscholar.org/CorpusID:122770101>.

Oliver Friedrich. Weighted essentially non-oscillatory schemes for the interpolation of mean values on unstructured grids. *Journal of Computational Physics*, 144(1):194–212, 1998. ISSN 0021-9991. doi: <https://doi.org/10.1006/jcph.1998.5988>. URL <https://www.sciencedirect.com/science/article/pii/S0021999198959885>.

Vivette Girault and Pierre-Arnaud Raviart. *Finite Element Methods for Navier-Stokes Equations: Theory and Algorithms*. Springer Publishing Company, Incorporated, 1st edition, 2011. ISBN 3642648886.

Sigal Gottlieb, Chi-Wang Shu, and Eitan Tadmor. Strong stability-preserving high-order time discretization methods. *SIAM Review*, 43(1):89–112, 2001. doi: [10.1137/S003614450036757X](https://doi.org/10.1137/S003614450036757X). URL <https://doi.org/10.1137/S003614450036757X>.

Marc Hesse, Jacob Jordan, Steve Vance, and Apurva Oza. Supporting information for ”downward oxidant transport through europa’s ice shell by density-driven brine percolation”. *Geophysical Research Letters*, 2022.

I.J Hewitt and A.C Fowler. Partial melting in an upwelling mantle column. *Proc. R. Soc. A*, 464:2467–2491, 2008.

Chieh-Sen Huang, Todd Arbogast, and Chenyu Tian. Multidimensional weno-ao reconstructions using a simplified smoothness indicator and applications to conservation laws. *J. Sci. Comput.*, 97, 2023.

Thomas J.R. Hughes. *The Finite Element Method: Linear Static and Dynamic Finite Element Analysis*. Dover Publications, 1987. ISBN 9780486411811.

Guang-Shan Jiang and Chi-Wang Shu. Efficient implementation of weighted eno schemes. *J. Comput. Phys.*, 126:202–228, 1996.

Richard F. Katz. Magma dynamics with the enthalpy method: Benchmark solutions and magmatic focusing at mid-ocean ridges. *Journal of Petrology*, 49: 2099–2121, 2008.

Richard F. Katz. *The Dynamics of Partially Molten Rock*. Princeton University Press, 1st edition, 2022. ISBN 9780691232645.

C. H. P. Lupis. *Chemical Thermodynamics of Materials*. Prentice Hall, 1983. ISBN 0130502383.

Dan Mckenzie. The generation and compaction of partially molten rock. *Journal of Petrology*, 25:713–765, 1984.

Dan Mckenzie and Mike J. Bickle. The volume and composition of melt generated by extension of the lithosphere. *Journal of Petrology*, 29:625–679, 1988.

Frank Olver. *Asymptotics and special functions*. AK Peters/CRC Press, 1997.

C. C. Paige and M. A. Saunders. Solution of sparse indefinite systems of linear equations. *SIAM Journal on Numerical Analysis*, 12(4):617–629, 1975. doi: 10.1137/0712047. URL <https://doi.org/10.1137/0712047>.

Michel Rabinowicz, Yanick Ricard, and Michel Grégoire. Compaction in a mantle with a very small melt concentration: Implications for the generation of carbonatitic and carbonate-bearing high alkaline mafic melt impregnations. *Earth and Planetary Science Letters*, 203:205–220, 2002.

P. A. Raviart and J. M. Thomas. A mixed finite element method for 2-nd order elliptic problems. In Ilio Galligani and Enrico Magenes, editors, *Mathematical Aspects of Finite Element Methods*, pages 292–315, Berlin, Heidelberg, 1977. Springer Berlin Heidelberg. ISBN 978-3-540-37158-8.

Neil Ribe. The generation and composition of partial melts in the earth’s mantle. *Earth and Planetary Science Letters*, 73:361–376, 1985.

M. Semplice and G. Visconti. Efficient implementation of adaptive order reconstructions. *Journal of Scientific Computing*, 83, 2020.

M. Semplice, E. Travaglia, and G. Puppo. One-and multi-dimensional cwenoz reconstructions for implementing boundary conditions without ghost cells. *Communications on Applied Mathematics and Computation*, 5:143–169, 2023.

Marc Spiegelman. Geochemical consequences of melt transport in 2-d: The sensitivity of trace elements to mantle dynamics. *Earth and Planetary Science Letters*, pages 115–132, 1996.

Marc Spiegelman and Tim Elliott. Consequences of melt transport for uranium series disequilibrium in young lavas. *Earth and Planetary Science Letters*, 118: 1–20, 1993.

Marc Spiegelman and Dan McKenzie. Simple 2-d models for melt extraction at mid-ocean ridges and island arcs. *Earth and Planetary Science Letters*, 83(1): 137–152, 1987. ISSN 0012-821X. doi: [https://doi.org/10.1016/0012-821X\(87\)90057-4](https://doi.org/10.1016/0012-821X(87)90057-4). URL <https://www.sciencedirect.com/science/article/pii/0012821X87900574>.

Sirui Tan and Chi-Wang Shu. Inverse lax-wendroff procedure for numerical boundary conditions of conservation laws. *Journal of Computational Physics*, 229(21):8144–8166, 2010. ISSN 0021-9991. doi: <https://doi.org/10.1016/j.jcp.2010.07.014>. URL <https://www.sciencedirect.com/science/article/pii/S0021999110003979>.

Homer F. Walker and Peng Ni. Anderson acceleration for fixed-point iterations. *SIAM Journal on Numerical Analysis*, 49(4):1715–1735, 2011. doi: 10.1137/10078356X. URL <https://doi.org/10.1137/10078356X>.

A. A. Wheeler, G. B. McFadden, and W. J. Boettinger. Phase-field model for solidification of a eutectic alloy. 452:495–525, 1996.