
Industrial 12V to 5V / 2A Synchronous Buck Converter

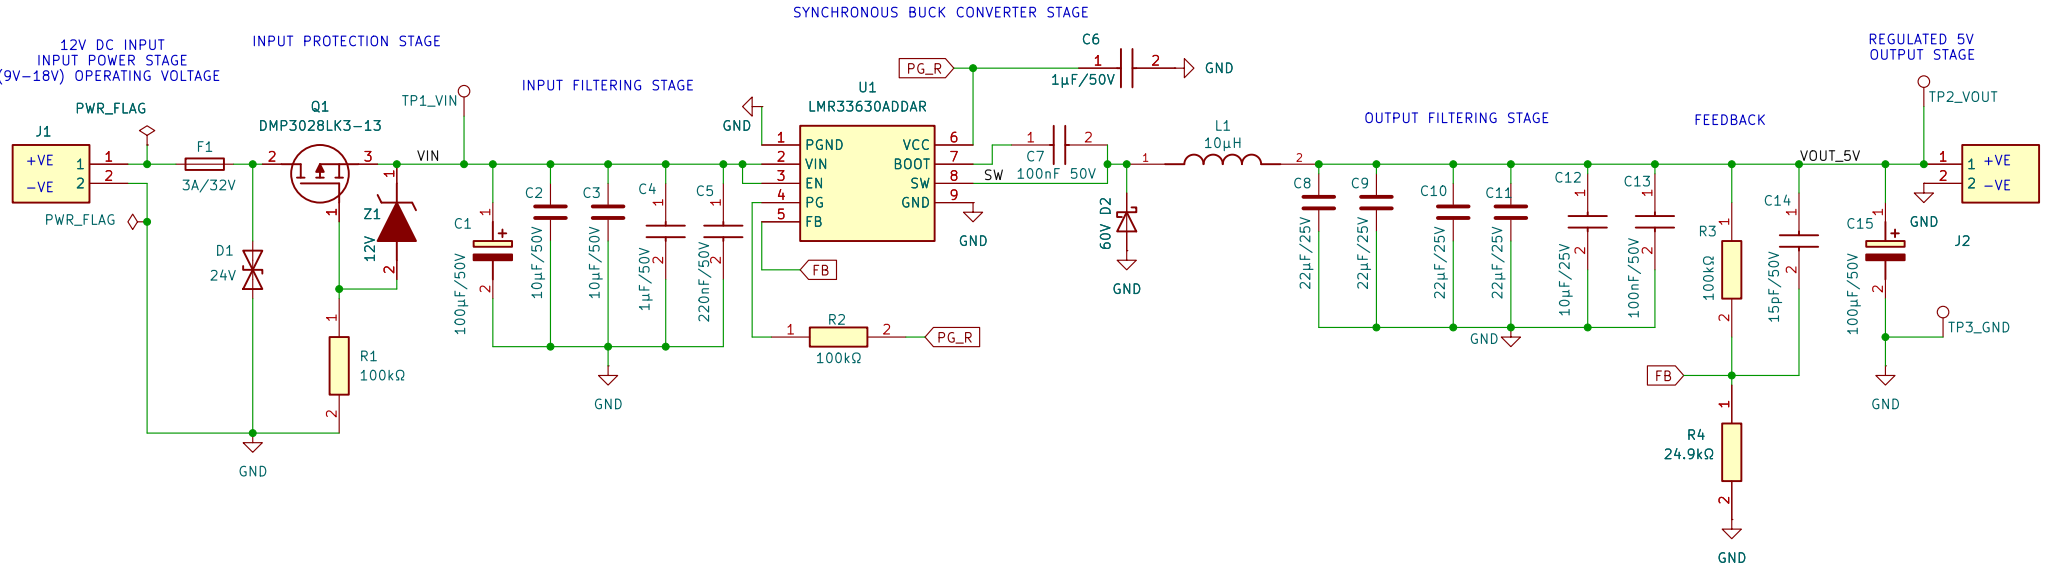

Design Notes:
Input Voltage : 9V–18V DC
Output Voltage : 5V DC
Output Current : (0–2)A Continuous
Peak Current : 2.5A
Switching Frequency : 400kHz
Topology : Synchronous Buck
PCB : 2–Layer
Target Efficiency : ≥85%
Target Ripple : <30mVpp

Controller: TI LMR33630ADDAR
Input: 9V-18V DC
Output: 5V DC / (0–2)A Continuous
Topology: Synchronous Buck Converter
ABBOJU NIKHIL

Sheet: /
File: 12V_5V_2A_Synchronous_Buck_converter.kicad_sch

Title: Industrial 12V to 5V / 2A Synchronous Buck Converter

Size: A4	Date: 2026-05-28	**Rev: REV 1.3**
KiCad E.D.A. 10.0.3		Id: 1/1