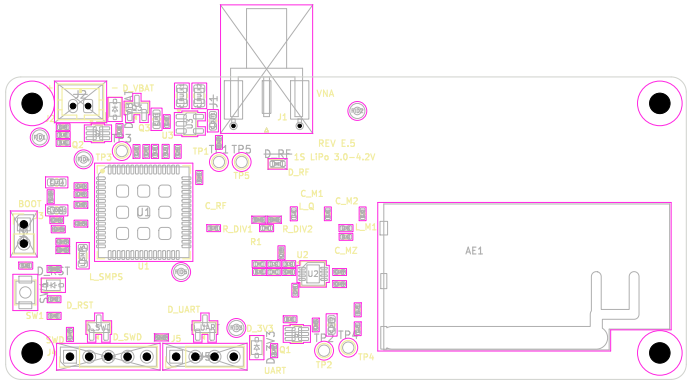



50R LPI CPWG (1.08/0.28 mm) | Elliptic LPF | IPC-6012B Class 2
Radiating Aperture (50..90 mm): 866.5 MHz Folded IFA + Bare-ENIG IDE Sensor
RF/MCU Bay (0..50 mm): Solid B.Cu GND + RAK3172LP-SiP (15 uH SMPS) + LT5538
2-Layer 1.6 mm FR-4 (1.51 mm core er=4.4, ENIG, Green LPI) | 90.0 x 40.0 mm
**RF & Embedded Systems Engineering**

Sheet:
File: ISAC_868_KiCad9.kicad_pcb

***Title: ISAC-868 LoRaWAN + RF Sensing Transceiver***

| Size: A4 | Date: 2026-11-05 | **Rev: E.5** |
|---|---|---|
| KiCad E.D.A. 9.0.8 | | Id: 1/1 |