

A wave-count stability atlas for the Koch–Kurosaka–Knowlen–Kutz rotating detonation engine analog

Ansh Pathak^{1,*}

¹*Independent researcher*

(Dated: August 2, 2026)

Rotating detonation engines (RDEs) support a discrete family of co-rotating wave states whose count N sets thrust uniformity and injector coupling, yet no systematic map of where each state lives in parameter space has been published for the reduced-order model of Koch *et al.* [Phys. Rev. E **101**, 013106 (2020); **104**, 024210 (2021)]. We present a two-parameter regime atlas of this KKKK analog over the injector plenum pressure u_p and injector stiffness s at two loss coefficients ϵ , computed with a JAX pseudospectral/ETDRK4 solver (5,856 integrations) and classified by a spectral mode hierarchy. The atlas reproduces the published single-parameter wave-count staircase (locked $N=1, 2, 3$ at $u_p = 0.6, 0.75, 0.9$, with wave speeds 8–10% below the analog Chapman–Jouguet speed) and organizes locked, galloping, and chaotic regimes into diagonal bands terminating in a high- u_p uniform-combustion sheet. Two methodological results follow. First, quasistatic continuation ramps systematically undercount wave states, because the uniform branch is a strong attractor; mapping the wave-supporting region requires fresh-pulse seeding. Second, the previously reported 0D Hopf bifurcation to pulsating uniform combustion is not reproduced by the exact uniform reduction, which is a steady attractor throughout the swept domain. A two-constant calibration frozen on three verified operating points of the University of Washington CH₄–O₂ engine places 19 of the 24 independently verified operating points that map inside the swept domain within one wave of the model prediction; the nine CH₄–O₂ points all agree within one wave and six exactly, including an AFRL transition band the calibration never saw. The residual disagreements are structural rather than random. Since the mapping carries no dependence on equivalence ratio, diluent, or channel width, several experimental points are mapped onto a single atlas cell. The atlas, code, and a re-verified experimental compilation with per-point provenance are released as open, DOI-versioned artifacts. All comparisons are qualitative regime correspondences: absolute thresholds are expected to disagree with experiment by factors of 2–3.

I. INTRODUCTION

Rotating detonation engines replace the isobaric heat release of conventional combustors with detonation waves circulating azimuthally in an annular channel, offering a pressure-gain thermodynamic cycle with projected efficiency advantages at low compression ratios [1–6]. An operationally important feature of these devices is that the number of co-rotating waves N is an emergent property rather than a design input: as mass flux, equivalence ratio, or injection pressure vary, engines abruptly transition between $N = 1, 2, 3, \dots$ wave states [7–13]. The wave count sets the frequency content of thrust oscillations, the thermal and mechanical load distribution, and the coupling to injector dynamics [14–16]; transitions between counts exhibit hysteresis and multi-stability [11, 17].

Classical estimates bound N geometrically: the fill-height criterion of Bykovskii *et al.* [7] and the cell-size ceilings compiled by Wolanski [1] express the maximum wave count in terms of the annulus perimeter and the detonation cell size λ , while refill-time arguments bound N by the ratio of perimeter to the product of wave speed and injector recovery time [9, 18]. All of these criteria set ceilings rather than predicting selection. None of them

says which state the engine adopts, where the transitions occur, or why they are hysteretic.

Koch, Kurosaka, Knowlen, and Kutz introduced a deliberately minimal alternative [17, 19]: a driven, dissipative analog of the Majda detonation model [20–22] in which an energy-like field steepens, detonates, and exhausts a combustion progress variable that an injector term continuously replenishes. The model reproduces mode-locked wave trains, wave nucleation and destruction, and modulational (“galloping”) instabilities [19], and has become the standard reduced-order testbed for data-driven RDE surrogates [23–25]. Yet its published characterization remains essentially one-dimensional: single-parameter sweeps of the injector pressure at fixed injector stiffness. To our knowledge, no two-parameter stability atlas of the KKKK model, the analog of the experimental mode maps of Refs. [8, 10, 11], has been published.

We supply that map here. The paper reports (1) a regime atlas of the KKKK analog over the (u_p, s) plane at two loss coefficients, built from 5,856 fresh-ignition integrations and classified by a reproducible spectral hierarchy (Sec. VI); (2) a validation suite that reproduces the published wave-count staircase quantitatively and documents one negative result, namely that the exact uniform (0D) reduction possesses no Hopf bifurcation in the swept domain, contrary to a claim in the source literature (Sec. IV); (3) a methodological finding with direct

* pathakansh10@gmail.com

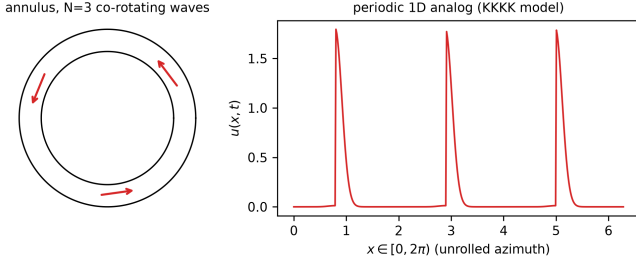


FIG. 1. The reduction. Left: the annular combustor with $N = 3$ co-rotating detonation waves. Right: the same state in the periodic one-dimensional analog, $u(x, t)$ on $x \in [0, 2\pi]$, showing three sharp Burgers-steepened fronts separated by refilled propellant.

experimental parallels: quasistatic continuation protocols trap on the uniform deflagrative branch and systematically under-report the wave-supporting region, so basin-respecting fresh-pulse seeding is required (Sec. V); and (4) a qualitative overlay of the atlas against a newly re-verified compilation of mode-transition data from six experimental campaigns, under a two-constant calibration frozen on three verified operating points (Sec. VII). Code, atlas, and data are openly released (Sec. IX).

II. MODEL

The model evolves an energy-like field $u(x, t)$ and a combustion progress variable $\lambda(x, t)$ on the periodic domain $x \in [0, 2\pi]$ (the unrolled annulus):

$$\partial_t u + u \partial_x u = (1 - \lambda) \omega(u) q_0 + \nu_1 \partial_x^2 u + \epsilon \xi(u), \quad (1)$$

$$\partial_t \lambda = (1 - \lambda) \omega(u) - \beta(u) \lambda + \nu_2 \partial_x^2 \lambda, \quad (2)$$

with closures

$$\omega(u) = k_p \exp[(u - u_c)/\alpha], \quad (3)$$

$$\xi(u) = (u_0 - u) u^n, \quad (4)$$

$$\beta(u) = \frac{s u_p}{1 + \exp[r(u - u_p)]}. \quad (5)$$

Figure 1 shows the correspondence the model asserts: the azimuthal coordinate of the annulus is unrolled onto the periodic line, and a wave train of N co-rotating detonations becomes an N -pulse traveling-wave solution. Equation (1) is a driven Burgers–Majda equation [20]: the quadratic advection steepens u into shock-like detonation analogs, sustained by heat release $(1 - \lambda)\omega q_0$ and damped by the loss $\epsilon \xi(u)$ (quadratic for $n=1$, $u_0=0$). Equation (2) is activator–inhibitor kinetics: combustion consumes propellant ($\lambda \rightarrow 1$) and the injector term $\beta(u)\lambda$ replenishes it at a rate controlled by the plenum pressure u_p and stiffness s , gated by the sigmoid so that refill occurs only behind the wave where $u < u_p$. The analog Chapman–Jouguet speed is $D_{CJ} = 2q_0$ [17]. We use the parameter conventions of Koch *et al.* 2021 [19] (their Table II) throughout; Table I lists the baseline values.

III. NUMERICAL METHODS

Discretization. Equations (1)–(2) are solved by Fourier pseudospectral collocation with $N = 512$ modes and 2/3-rule dealiasing of the quadratic product [26]. The stiff diagonal linear (diffusive) part is integrated exactly and the nonlinear part with fourth-order exponential time differencing (ETDRK4) [27], with the φ -function coefficients evaluated stably by the Kassam–Trefethen contour-integral method [28]. We verified machine-precision agreement on linear problems and fourth-order self-convergence on the full nonlinear system. All computations use double precision.

Time step. We use $dt = 5 \times 10^{-4}$ with $t_{\text{final}} = 200$, observing the final 50 time units (1,000 snapshots). This choice is set by stability rather than by accuracy alone. A step of $dt = 10^{-3}$ reproduces the $dt = 5 \times 10^{-4}$ diagnostics to four decimals at $u_p = 0.6$ and 0.75 , but goes unstable (NaN) at $u_p \geq 0.9$, where the $N=3$ states have steeper fronts. Marginal stability also proved platform-dependent; we observed configurations that integrate on one CPU architecture and blow up on another. We therefore use the conservative step throughout.

Sweeps. The solver is implemented in JAX and batched with `vmap` across the s axis; the production atlas ran on datacenter GPUs. Two protocols are used, and the distinction matters (Sec. V): *continuation ramps*, in which u_p is stepped quasistatically and each point inherits the previous final state (the numerical analog of an experimental throttle ramp, run in both directions to expose hysteresis), with extinguished states re-ignited by a fresh pulse; and *fresh-ignition sweeps*, in which every (u_p, s) point is integrated independently from the standard ignition kernel $u(x, 0) = 1.5 \text{sech}^{20}(x - 1)$, $\lambda(x, 0) = 0.5$ [17].

Classification. Each run’s observation window is classified by a deterministic hierarchy: (i) decayed (max u below threshold); (ii) spatially uniform, split steady/pulsating by the temporal variance of the mean; (iii) mode-locked N : dominant azimuthal wavenumber with harmonic comb purity ≥ 0.8 (the summed spectral power on $k = N, 2N, 3N, \dots$, used because a sharp N -pulse train carries only roughly half its energy in the fundamental), together with peak-count stationarity and low amplitude modulation; (iv) galloping (locked count,

TABLE I. Baseline model parameters (conventions of Ref. [19]). u_p , s , and ϵ are swept.

q_0	1.0	u_c	1.1
α	0.3	u_0	0.0
k_p	1.0	r	5.0
n	1	$\nu_1 = \nu_2$	0.0075
u_p (sweep)	0–1.2	s (sweep)	0.5–5.0
ϵ	0.1, 0.15		

modulated amplitude) [19]; (v) counter-rotating (significant negative-frequency power); (vi) chaotic (broadband, purity < 0.4). Wave speed is measured from the spectral phase slope of the dominant mode. The classifier is unit-tested against synthetic signals of each class.

IV. VALIDATION AGAINST PUBLISHED RESULTS

A. The single-parameter staircase

At the baseline stiffness $s = 3.5$, $\epsilon = 0.15$, fresh-pulse integrations lock onto traveling wave trains with $N = 1$ at $u_p = 0.6$, $N = 2$ at 0.75, and $N = 3$ at 0.9, with wave speeds $c = 1.84, 1.81, 1.83$ respectively, an 8–10% deficit from the analog $D_{CJ} = 2$ that is consistent with the velocity deficits of Refs. [17, 19]. Figure 2 shows these states directly, as straight, equally spaced fronts with no amplitude modulation, which is the signature of a mode-locked train. Their DMD spectra (Fig. 3) place the dynamic eigenvalues on the unit circle, as required for a neutrally stable traveling wave, with the number of distinct conjugate pairs tracking N ; only weakly damped transient modes fall inside. Below the staircase the system settles to uniform steady deflagration ($u_p = 0.2$) and extinguishes at $u_p \approx 0$. Along the full staircase line of the atlas (Fig. 5) the locked count ascends $1 \rightarrow 2 \rightarrow 3$ with onsets at $u_p \approx 0.34, 0.64, 0.84$ at $\epsilon = 0.15$, to be compared with the published onsets $\approx 0.56, 0.65, 0.9$ [19]: the $N \geq 2$ onsets agree closely while the $N = 1$ onset ignites earlier in our fresh-pulse protocol, which seeds a finite-amplitude pulse rather than tracking the infinitesimal stability boundary. At $\epsilon = 0.1$ the cascade reaches $N = 4$, confirming the expected loss-dependence of the ceiling.

B. A negative result: no 0D Hopf bifurcation

The source literature describes, and our research proposal repeated, a Hopf bifurcation of the spatially uniform (0D) branch to pulsating uniform combustion near $u_p \approx 0.55$. We tested this directly. A Jacobian eigenvalue scan of the exact uniform reduction of Eqs. (1)–(2) over $(u_p, s) \in [0.05, 1.4] \times [1, 7]$, in both the 2020 and 2021 injector conventions, finds the uniform branch to be a steady attractor everywhere. No eigenvalue pair crosses the imaginary axis, and long 0D integrations from perturbed states decay to fixed points (tail oscillation amplitudes $\sim 10^{-10}$). The pulsating phenomenology of the PDE therefore requires essential participation of the advective and spatial terms, and does not descend from a 0D instability. We note this explicitly because reduced-order studies frequently cite the 0D pulsation as a validation anchor, and in these conventions it is absent.

V. CONTINUATION PROTOCOLS UNDERCOUNT WAVE STATES

Our first atlas attempt used bidirectional continuation ramps, the seemingly natural analog of an experimental throttle sweep. That attempt failed, and the failure is worth recording. Because the uniform deflagrative branch is a steady attractor at every swept point (Sec. IV B), any ramp that visits it becomes trapped. The forward (cold-start) ramp settled onto the uniform branch at low u_p and then reported uniform combustion, and zero wave states, across the entire (u_p, s) plane, while the backward ramp, seeded hot at $u_p = 1.2$, retained the wave staircase only for $s \lesssim 2.6$ and lost it at higher stiffness. Re-ignition logic gated on extinction does not help, because the trapped state is alive and merely waveless. At baseline stiffness the wave states are therefore reachable from finite-amplitude ignition but not from quasistatic continuation of the uniform state; the staircase attracts globally rather than locally.

There is a direct experimental parallel. RDEs are not started by quasistatic throttle ramps from cold flow; ignition is a discrete event, typically a predetonator tube or a spark train, that deposits a finite-amplitude disturbance [3, 7]. The model reproduces this basin structure. We therefore build the atlas of Sec. VI from fresh-ignition sweeps, one standard pulse per grid point, which map the wave-supporting region, and retain the continuation ramps only as the hysteresis diagnostic at low stiffness, where both branches support waves. Reduced-order sweep studies that inherit states across parameter steps should audit for this trap.

VI. THE TWO-PARAMETER ATLAS

Figure 4 shows the atlas at $\epsilon = 0.1$; the $\epsilon = 0.15$ panel is structurally identical with the $N=4$ band suppressed. Of the 5,856 classified integrations, 2,152 are mode-locked, 1,339 galloping, 180 chaotic, 1,984 uniform, and 201 decayed. The structure they form is simple and robust.

Diagonal regime bands. Each locked count N occupies a band running diagonally in (u_p, s) : at higher injector stiffness, a higher plenum pressure is required to reach the same count. Counts ascend monotonically with u_p along any horizontal cut, reproducing the experimental monotonicity of N with mass flux [8, 9, 11].

Galloping window between counts. Transitions $N \rightarrow N+1$ proceed generically through a galloping (modulated-amplitude) window rather than directly, consistent with the modulational instabilities of Ref. [19]; chaotic patches concentrate between the high count bands, where competing wavenumbers are near-degenerate.

Uniform sheet at high u_p . Beyond the last locked band the injector overwhelms wave-mediated consumption and the system settles to uniform combustion, the analog of

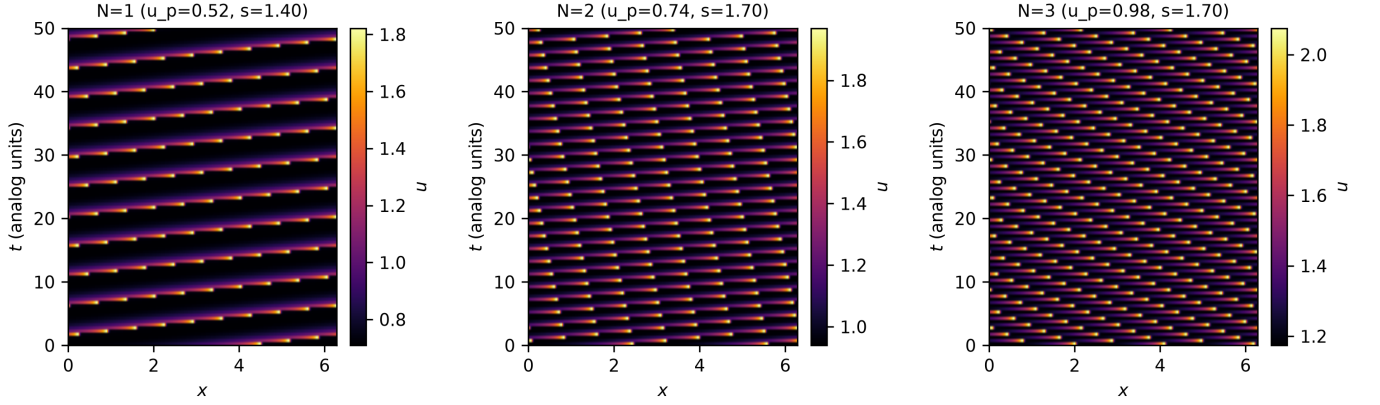


FIG. 2. Space-time diagrams of the mode-locked states, $u(x, t)$ over the final 50 time units. Left to right: $N = 1$ ($u_p = 0.52$, $s = 1.40$), $N = 2$ ($u_p = 0.74$, $s = 1.70$), and $N = 3$ ($u_p = 0.98$, $s = 1.70$). The fronts are straight and equally spaced (constant wave speed, fixed count, no amplitude modulation), and their common slope gives the phase velocity quoted in the text. Fields from the continuation sweep, which stores snapshots; the production atlas stores scalar diagnostics only.

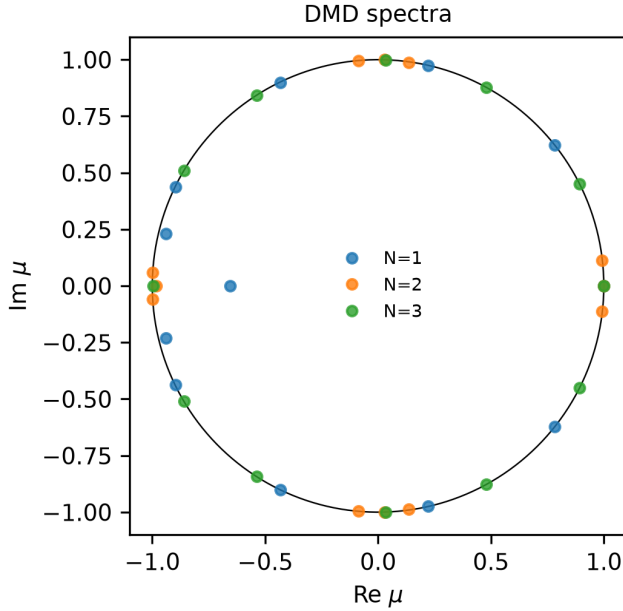


FIG. 3. Exact-DMD eigenvalues μ of the observation window for the three locked states of Fig. 2, with the unit circle drawn. Eigenvalues lie on $|\mu| = 1$ (neutrally stable rotation of a fixed spatial pattern); the interior point in the $N = 1$ set is a decaying transient.

the transition out of the detonative regime at high injection pressure.

Transition classification. A heuristic pass over the atlas labels 1,320 regime boundaries: 775 Hopf-type (locked $\leftrightarrow$ galloping, amplitude-modulation onset), 46 wave-count jumps ($N \rightarrow N \pm 1$), and 499 other (ignition/extinction and uniform-boundary crossings).

Hysteresis. Where both ramp directions support waves, their locked counts disagree over a well-defined region (Fig. 6): the disagreement band is confined to

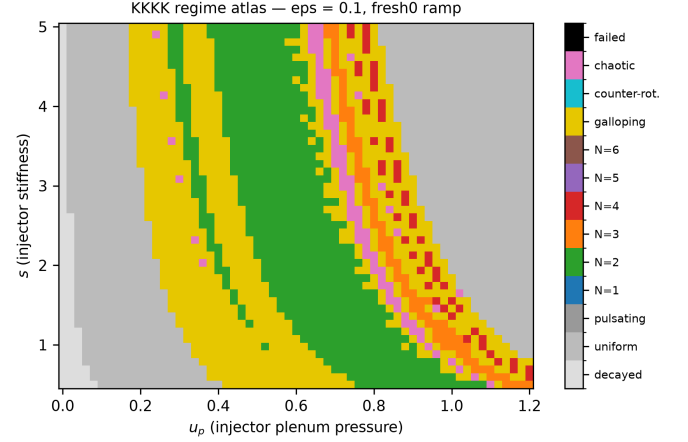


FIG. 4. Regime atlas of the KKKK analog at $\epsilon = 0.1$ (fresh-ignition protocol, 61×48 grid in (u_p, s)). Diagonal bands of locked $N=2, 3, 4$ states (green, orange, red) are separated by galloping windows (yellow) and chaotic transition zones (pink), terminating in uniform combustion (gray) at high u_p and extinction (light gray) at low u_p .

$s \lesssim 2.7$ and $u_p \gtrsim 0.4$, which is the sub-domain in which the backward ramp escapes the uniform branch at all (Sec. V). The figure therefore superposes two distinct effects: genuine bistability of neighbouring locked branches at low stiffness, and the protocol-dependent trapping that removes the wave states entirely above it. The fresh-ignition atlas of Sec. VI separates them.

Fold scaling. Amplitude growth along the $N = 2$ branch away from its low- u_p termination is monotonic and of the magnitude a saddle-node onset would give (Fig. 7), but we explicitly do *not* claim the exponent: the sampled points depart visibly from a fitted $A \propto \sqrt{u_p - u_{p,c}}$ law, and the present grid spacing ($\Delta u_p = 0.02$) does not resolve the immediate neighbourhood of the fold where the square-root regime would hold. Estab-

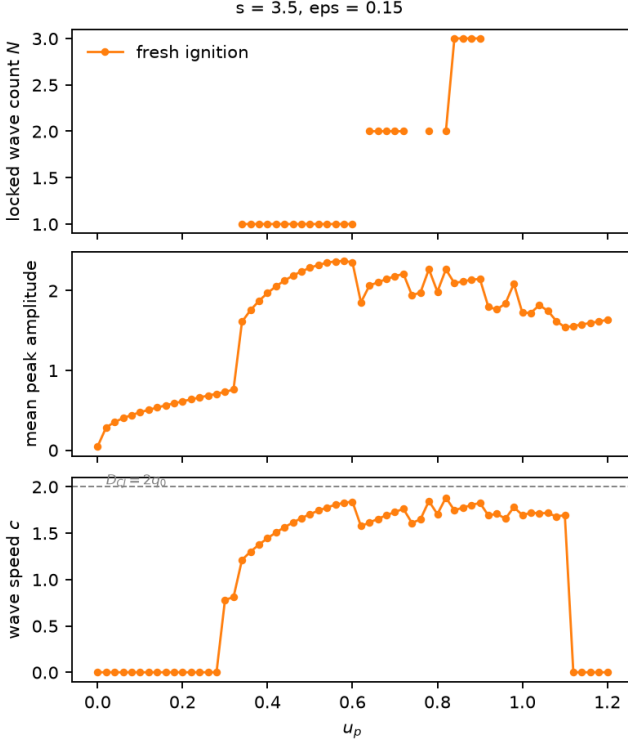


FIG. 5. Wave-count staircase along the baseline stiffness line of the atlas ($s = 3.5$, $\epsilon = 0.15$, fresh ignition): locked N , mean peak amplitude, and wave speed versus u_p . The count ascends in plateaus with onsets at $u_p \approx 0.34$, 0.64 and 0.84 ; wave speed rises toward the analog CJ speed $D_{CJ} = 2q_0$ (dashed) and saturates 8–10% below it, then collapses to zero above $u_p \approx 1.1$ where the solution becomes uniform. Blank stretches in the top panel are points not classified as mode-locked (galloping or uniform), which by construction carry no locked count.

lishing it, and a systematic normal-form classification of the boundaries, requires numerical continuation of the traveling-wave boundary-value problem [29, 30] rather than a grid sweep; we leave that to future work.

Multistability. The fresh-ignition atlas is single-valued by construction (one ignition kernel per point), but the low-stiffness continuation ramps and the trap of Sec. V demonstrate at least bistability (wave state vs. uniform branch) across the entire wave-supporting region, and wave-wave bistability inside the hysteresis bands. This matches the run-to-run mode variability reported near experimental transition boundaries [10, 11].

VII. QUALITATIVE EXPERIMENTAL COMPARISON

A. Verified mode-transition compilation

We re-derived the experimental comparison set from primary sources rather than proposal-quoted values, ver-

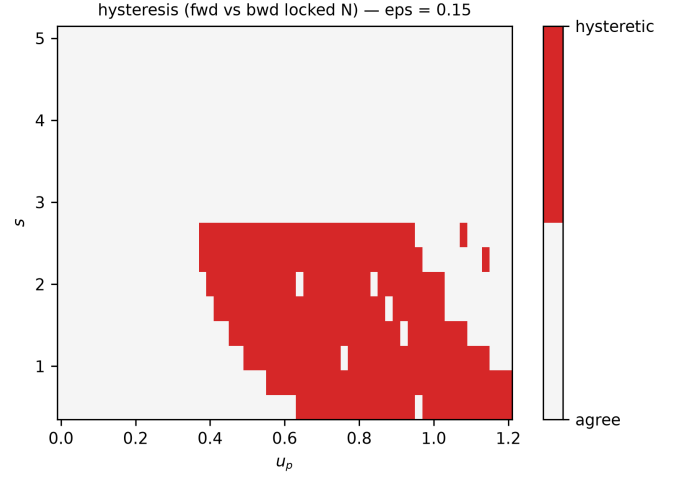


FIG. 6. Ramp-direction dependence at $\epsilon = 0.15$: cells where the forward and backward continuation sweeps settle on different locked counts (red) versus agreement (grey). The hysteretic region is bounded above by $s \approx 2.7$, coinciding with the stiffness beyond which the backward ramp no longer sustains waves (Sec. V).

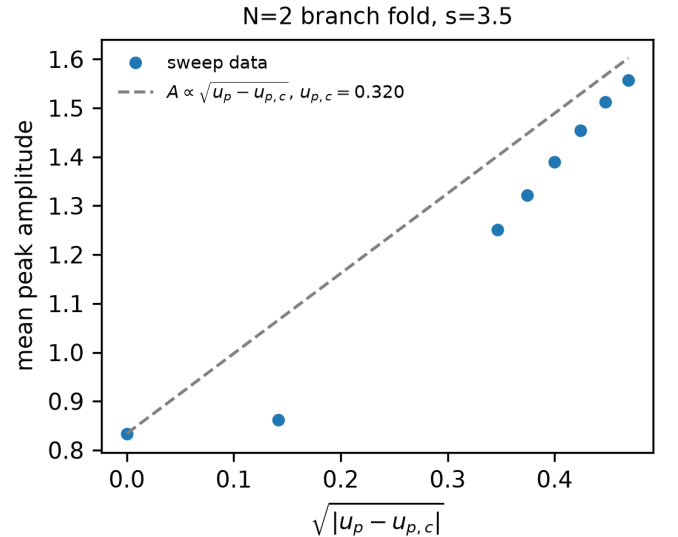


FIG. 7. Mean peak amplitude of the $N = 2$ branch at $s = 3.5$ against $\sqrt{|u_p - u_{p,c}|}$, with a square-root law fitted at $u_{p,c} = 0.320$ (dashed). The data are monotonic but do not follow the fit: the grid does not sample the fold neighbourhood densely enough to test the exponent, so no scaling claim is made.

ifying 25 of 37 compiled operating points against open-access texts (author theses and dissertations, arXiv preprints, and open companion papers on identical hardware), with verbatim provenance recorded per point in the released dataset. This audit materially corrected the compilation: geometries (Refs. [12, 13]), fuel systems (Refs. [7, 8]), mode taxonomies (Ref. [10]), and in several cases the existence of claimed transitions. The canonical KKKK experimental reference [17] publishes

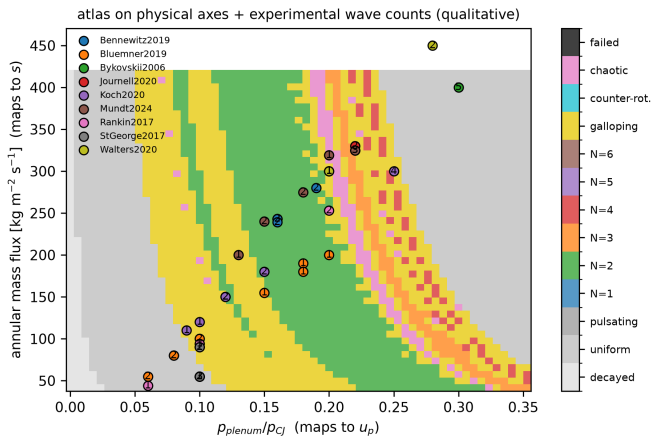


FIG. 8. Atlas regimes mapped to physical axes via the frozen calibration Eq. (6), with experimental wave counts (symbols, labeled by observed N) from the compilation; five laboratories contribute verified points and the sixth (Lavrentyev) remains unverified. Agreement claims are qualitative: regime ordering and transition topology, not absolute thresholds.

no quantitative operating conditions at all (its $1 \rightarrow 2$ and $2 \rightarrow 1$ transitions are qualitative video observations during startup and shutdown transients), so quantitative anchoring must come from the same laboratory’s scale-effects campaign [11], which reports a verified $2 \rightarrow 3$ transition between 250 and 300 $\text{kg s}^{-1} \text{m}^{-2}$ on the 76 mm $\text{CH}_4\text{-O}_2$ engine, with both counts observed at repeated conditions inside the band. That experimental bistability echoes the model’s hysteresis structure directly. The AFRL 76 mm $\text{CH}_4\text{-O}_2$ campaign [9] independently brackets its $2 \rightarrow 3$ transition at total flows corresponding to 268–291 $\text{kg s}^{-1} \text{m}^{-2}$, so two laboratories bracket the same transition band.

B. Frozen two-constant calibration

The KKKK parameters are not measurable, so any overlay requires a mapping. We use the minimal two-constant form

$$s = c_s \frac{\dot{m}''}{\dot{m}_{\text{ref}}''}, \quad u_p = c_p \frac{p_{\text{plenum}}}{p_{CJ}}, \quad (6)$$

with $\dot{m}''$ the annular mass flux. The two constants were tuned by grid search against the atlas using *only* the three verified UW 76 mm anchor points (2 waves at 240, bistable band at 275, 3 waves at 325 $\text{kg s}^{-1} \text{m}^{-2}$), yielding $c_s = 2.4$, $c_p = 3.4$ at $\dot{m}_{\text{ref}}'' = 200 \text{ kg s}^{-1} \text{m}^{-2}$, and then frozen: no per-dataset adjustment. Figure 8 overlays all compiled points on the atlas mapped to physical axes.

We score a point as agreeing *within one wave* if the atlas cell it maps to is a wave-bearing state (mode-locked, galloping, counter-rotating or chaotic) whose dominant count differs from the observed count by at most one, and as *exact* if the cell is additionally mode-locked with

equal count. Of the 25 verified points, 24 map inside the swept domain (the remaining one, a Purdue condition at 450 $\text{kg s}^{-1} \text{m}^{-2}$ [31], exceeds it); of those 24, 19 agree within one wave and 6 exactly. All nine $\text{CH}_4\text{-O}_2$ points agree within one wave and six exactly, and this includes the AFRL $2 \rightarrow 3$ bracketing pair [9], which the calibration never saw. The transfer from the UW anchors to a different laboratory’s engine is the only predictive test in the comparison.

The disagreements are structural, and in two distinct ways. First, they are *not* one-signed: the model over-counts by one where a campaign reports a single dominant wave accompanied by weaker secondary waves (TU Berlin’s D/S2 and D modes [10], the Purdue natural-gas conditions [12, 31]) and under-counts where the reported state is a counter-rotating pair or a high-flux small-diameter single wave. This is expected: the quantity the model counts (co-rotating fronts in a single azimuthal direction) is not the same observable as the wave count reported for a dominant-plus-secondary or counter-rotating structure, which the model cannot represent at all (Sec. VIII). Second, the two-constant mapping is *degenerate* with respect to every variable it omits: 14 of the 24 points share an atlas cell with at least one other point, so wherever two such points report different counts at the same mass flux and pressure ratio, they cannot both agree by construction. The clearest case is the Cincinnati dilution study [8], whose $N = 1, 2, 3$ states occur at essentially fixed mass flow. The transitions there are driven by nitrogen dilution and channel width, i.e. by detonation cell size, which Eq. (6) does not carry, so all three collapse onto one cell. Likewise the AFRL $\phi = 1.1$ and $\phi = 1.7$ points at equal flux differ by one wave experimentally and map to the same cell.

A cell-size-aware mapping (e.g. c_s scaled by λ , which sets the geometric wave-count ceiling [1, 7] and differs by an order of magnitude between these propellant families) is the obvious refinement, and an equivalence-ratio dependence a second one; both would add tuned constants, and we prefer to report the failure mode of the minimal mapping. The overlay’s pressure-ratio axis also rests on estimated plenum-to-CJ ratios for most campaigns, since verified plenum pressures exist only for a subset. The mass-flux axis is the verified one.

Three qualitative correspondences survive any reasonable calibration: (i) monotonic ascent of N with mass flux at fixed geometry; (ii) transition through modulated/irregular windows rather than clean jumps; and (iii) bistability at transition boundaries, observed as run-to-run mode variability experimentally [10, 11] and as hysteresis/basin structure in the model.

VIII. LIMITATIONS

The KKKK system is a phenomenological analog: u and λ map only loosely onto pressure and mixture fraction, and the model contains no 3D gasdynamics, injec-

tor acoustics, mixing, wall heat loss, curvature, or deflagrative parasitic combustion [15, 16]. It cannot represent counter-rotating wave pairs, which dominate entire regimes of the TU Berlin campaign [10, 32], nor longitudinal pulsed detonation modes. Absolute transition thresholds should be trusted only to factors of 2–3; the mapping Eq. (6) is first-order and fuel-blind by construction. The viscous regularization $\nu_{1,2}$ diffuses shock fronts, so front-scale quantities are not converged in the inviscid limit. The fresh-ignition atlas depends in principle on the ignition kernel; we used the standard KKKK pulse throughout and did not map basin boundaries, beyond establishing the uniform-branch trap of Sec. V. Finally, the transition classification (Hopf vs. fold vs. count-jump) is heuristic, based on diagnostics across neighboring grid cells rather than continuation of invariant solutions.

IX. CONCLUSION AND OUTLOOK

We have mapped the wave-count selection landscape of the standard reduced-order RDE analog: diagonal locked- N bands in the injector plane separated by galloping and chaotic windows, bounded by extinction below and uniform combustion above, with the published staircase recovered along the baseline cut and hysteresis/bistability concentrated at the band edges. The atlas also serves as a benchmark surface for the growing family of data-driven RDE surrogates [23–25]; a surrogate that cannot reproduce the band topology fails at a more basic level than trajectory error. Two cautionary results, the

absent 0D Hopf bifurcation and the continuation trap on the uniform branch, are directly actionable for reduced-order modeling practice.

Natural extensions include: coupling $\beta(u)$ to a dynamic injector plenum to close the acoustics loop [14]; embedding the atlas in a thermodynamic cycle analysis [5, 33]; formal amplitude-equation reduction near the locked-galloping boundaries, where the phenomenology suggests complex Ginzburg–Landau structure [34, 35]; and a fuel-aware physical mapping anchored to cell-size databases to upgrade the overlay from qualitative to semi-quantitative.

CODE AND DATA AVAILABILITY

Code: <https://github.com/abc000cool/rde-wave-atlas> (MIT), archived at 10.5281/zenodo.21697129, a concept DOI that always resolves to the latest release. This paper describes v1.0.2. Atlas dataset (NetCDF/Parquet) and the verified experimental compilation (CSV with per-point provenance), CC-BY-4.0: 10.5281/zenodo.21697131. All figures in this paper regenerate from the released artifacts with two commands documented in the repository README.

ACKNOWLEDGMENTS

Numerical sweeps were performed on Modal cloud GPUs. The experimental compilation draws on open-access theses and repositories of TU Berlin, the University of Washington, the University of Cincinnati, Purdue University, and OSTI/DTIC.

-
- [1] P. Wolański, Detonative propulsion, *Proceedings of the Combustion Institute* **34**, 125 (2013).
 - [2] B. A. Rankin, M. L. Fotia, A. G. Naples, C. A. Stevens, J. L. Hoke, T. A. Kaemming, S. W. Theuerkauf, and F. R. Schauer, Overview of performance, application, and analysis of rotating detonation engine technologies, *Journal of Propulsion and Power* **33**, 131 (2017).
 - [3] F. K. Lu and E. M. Braun, Rotating detonation wave propulsion: Experimental challenges, modeling, and engine concepts, *Journal of Propulsion and Power* **30**, 1125 (2014).
 - [4] E. M. Braun, F. K. Lu, D. R. Wilson, and J. A. Camberos, Airbreathing rotating detonation wave engine cycle analysis, *Aerospace Science and Technology* **27**, 1 (2013).
 - [5] T. Kaemming, M. L. Fotia, J. Hoke, and F. Schauer, Thermodynamic modeling of a rotating detonation engine through a reduced-order approach, *Journal of Propulsion and Power* **33**, 1170 (2017).
 - [6] C. A. Nordeen, *Thermodynamics of a rotating detonation engine*, Ph.D. thesis, University of Connecticut (2013).
 - [7] F. A. Bykovskii, S. A. Zhdan, and E. F. Vedernikov, Continuous spin detonations, *Journal of Propulsion and Power* **22**, 1204 (2006).
 - [8] A. St. George, R. Driscoll, V. Anand, and E. Gutmark, On the existence and multiplicity of rotating detonations, *Proceedings of the Combustion Institute* **36**, 2691 (2017).
 - [9] J. W. Bennewitz, B. R. Bigler, J. J. Pilgram, and W. A. Hargus, Modal transitions in rotating detonation rocket engines, *International Journal of Energetic Materials and Chemical Propulsion* **18**, 91 (2019).
 - [10] R. Bluemner, M. D. Bohon, C. O. Paschereit, and E. J. Gutmark, Counter-rotating wave mode transition dynamics in an RDC, *International Journal of Hydrogen Energy* **44**, 7628 (2019).
 - [11] T. Mundt, C. Knowlen, and M. Kurosaka, Scale effects on rotating detonation rocket engine operation, *Applications in Energy and Combustion Science* **19**, 100282 (2024).
 - [12] C. L. Journell, R. M. Gejji, I. V. Walters, A. I. Lemcherfi, C. D. Slabaugh, and J. B. Stout, High-speed diagnostics in a natural gas–air rotating detonation engine, *Journal of Propulsion and Power* **36**, 498 (2020).
 - [13] B. A. Rankin, D. R. Richardson, A. W. Caswell, A. G. Naples, J. L. Hoke, and F. R. Schauer, Chemiluminescence imaging of an optically accessible non-premixed rotating detonation engine, *Combustion and Flame* **176**, 12 (2017).

- [14] V. Anand and E. Gutmark, Rotating detonation combustors and their similarities to rocket instabilities, *Progress in Energy and Combustion Science* **73**, 182 (2019).
- [15] V. Raman, S. Prakash, and M. Gamba, Nonidealities in rotating detonation engines, *Annual Review of Fluid Mechanics* **55**, 639 (2023).
- [16] F. Chacon, A. D. Feleo, and M. Gamba, Secondary waves dynamics and their impact on detonation structure in rotating detonation combustors, *Shock Waves* **31**, 675 (2021).
- [17] J. Koch, M. Kurosaka, C. Knowlen, and J. N. Kutz, Mode-locked rotating detonation waves: Experiments and a model equation, *Physical Review E* **101**, 013106 (2020), 1908.03116.
- [18] R. T. Fievisohn and K. H. Yu, Steady-state analysis of rotating detonation engine flowfields with the method of characteristics, *Journal of Propulsion and Power* **33**, 89 (2017).
- [19] J. Koch, M. Kurosaka, C. Knowlen, and J. N. Kutz, Multiscale physics of rotating detonation waves: Autosolitons and modulational instabilities, *Physical Review E* **104**, 024210 (2021), 2003.06655.
- [20] A. Majda, A qualitative model for dynamic combustion, *SIAM Journal on Applied Mathematics* **41**, 70 (1981).
- [21] A. R. Kasimov, L. M. Faria, and R. R. Rosales, Model for shock wave chaos, *Physical Review Letters* **110**, 104104 (2013).
- [22] L. M. Faria, A. R. Kasimov, and R. R. Rosales, Theory of weakly nonlinear self-sustained detonations, *Journal of Fluid Mechanics* **784**, 163 (2015).
- [23] A. Mendible, J. Koch, H. Lange, S. L. Brunton, and J. N. Kutz, Data-driven modeling of rotating detonation waves, *Physical Review Fluids* **6**, 050507 (2021).
- [24] J. Koch, Data-driven surrogates of rotating detonation engine physics with neural ordinary differential equations, *Physics of Fluids* **33**, 091703 (2021).
- [25] J. L. Callahan, J. Koch, B. W. Brunton, J. N. Kutz, and S. L. Brunton, Learning dominant physical processes with data-driven balance models, *Nature Communications* **12**, 1016 (2021).
- [26] L. N. Trefethen, *Spectral Methods in MATLAB* (SIAM, 2000).
- [27] S. M. Cox and P. C. Matthews, Exponential time differencing for stiff systems, *Journal of Computational Physics* **176**, 430 (2002).
- [28] A.-K. Kassam and L. N. Trefethen, Fourth-order time-stepping for stiff PDEs, *SIAM Journal on Scientific Computing* **26**, 1214 (2005).
- [29] Y. A. Kuznetsov, *Elements of Applied Bifurcation Theory*, 4th ed. (Springer, 2023).
- [30] D. Barkley, A model for fast computer simulation of waves in excitable media, *Physica D* **49**, 61 (1991).
- [31] I. V. Walters, C. L. Journell, A. Lemcherfi, R. M. Gejji, S. D. Heister, and C. D. Slabaugh, Operability of a natural gas–air rotating detonation engine, *Journal of Propulsion and Power* **36**, 453 (2020).
- [32] M. D. Bohon, R. Bluemner, C. O. Paschereit, and E. J. Gutmark, High-speed imaging of wave modes in an RDC, *Experimental Thermal and Fluid Science* **102**, 28 (2019).
- [33] J. Koch and J. N. Kutz, Modeling thermodynamic trends of rotating detonation engines, *Physics of Fluids* **32**, 126102 (2020).
- [34] I. S. Aranson and L. Kramer, The world of the complex Ginzburg–Landau equation, *Reviews of Modern Physics* **74**, 99 (2002).
- [35] M. C. Cross and P. C. Hohenberg, Pattern formation outside of equilibrium, *Reviews of Modern Physics* **65**, 851 (1993).