



FLY FISHERS INTERNATIONAL

Master Fly Casting Instructor (MCI) Performance Test – Evaluation Form

Candidate: _____ Date: _____

Lead Examiner: _____ Location: _____

2nd Examiner: _____ Other: _____

The MCI candidate must be a current Fly Fishers International (FFI) Certified Fly Casting Instructor (CI). FFI may waive the prerequisite for being a current FFI CI if the candidate has at least the equivalent certification from another recognized casting organization such as EFFA, GAIA, AAPGAI, APGAI Ireland, or SGAIC. A waiver must be approved prior to the date of the examination, and more information can be found [here](#).

Test Structure:

The examination is comprised of Section 1 (Casting Performance, which includes Sub-Sections 1A and 1B), Section 2 (Teaching Performance), and Section 3 (Discussion). All three Sections must be passed in order to pass the examination. Successful candidates can fail no more than two tasks in the Casting Performance Tasks in Section 1, must pass all the teaching tasks in Section 2, and must pass Section 3 (Discussion), which will be scored by the examiners in aggregate as a Pass or Fail. All Sections and Sub-Sections will be performed in sequence. Section 1 will be performed prior to Section 2, which in turn, will be completed before moving to Section 3. Sub-Section 1A will be performed before Sub-Section 1B.

Scoring:

Task scoring is P (pass), B (borderline), or F (fail). A task will be scored B when the examiners are uncertain whether the candidate has met the requirements of a task. Two B scores are equivalent to one F (and 1B = 1/2 F).

Sub-Sections 1A and 1B shall be scored together as Section 1. Any B and F scores in Sub-Section 1A will be carried forward and aggregated with any B's and F's in Sub-Section 1B to determine the candidate's score for Section 1.

The diagrams at the end of this examination are intended to clarify what is expected of candidates and to help evaluate their performance.

Several of the terms used in the exam, including those describing loop shapes, can be found in the [Current Version of the FFI Fly Casting Definitions](#). MCI candidates and examiners are expected to be familiar with this entire definition set.

Equipment Requirements:

- The candidate will supply the following equipment (as well as any wading gear and teaching aids that he or she may elect to use).
- In the event of equipment failure, other equipment may be substituted with the approval of the examination team.
- **Rods** will be 9 ft. (2.74m) maximum; 7 wt. maximum. The candidate may use different rods in Sub-Sections 1A and 1B. Changing the rod within a Sub-Section is not permitted.
- **Lines** will be commercial production lines available to the general public.
 - **The floating line required for Sub-Section 1A** will be:
 - of one-piece construction.
 - Rated by the manufacturer as no more than a 7 weight line. A candidate may use different lines for Sub-Sections 1A and 1B. Changing the line within Sub-Sections 1A and 1B is not permitted.
 - If a **second floating line is chosen for Sub-Section 1B**, then it must weigh 260 grains or less at 30 ft. This second floating line may be a shooting head but must be attached to coated running line.
 - It is **highly recommended** that the candidate use high visibility lines.
- **Leader** will be 7 ½ ft. (2.3m) minimum. Leaders may be monofilament nylon, co-polymer or fluorocarbon. Braided or metallic leaders are not permitted.
- **Fly** will be made only of yarn.

General Information:

- Before the examination, the candidate will inform the examiners of his or her dominant hand.
- All casts and presentations must be made with only one hand touching the rod.
- All casts requiring anchors will be carried out on moving or still water.
- Once the examination has started, no one may coach the candidate at any time.
- During the exam, the examiners will only read candidates the initial text of tasks and not required performance standards and expectations for tasks. Candidates are expected to know the exam extremely well but may request additional parts of the tasks to be read to them.
- **The examination team will choose one task in each of Sub-Sections 1A and 1B and ask the candidate to give a brief overview of its steps.** After these explanations the candidate will demonstrate the cast/presentation as described in the task. Candidates should only describe what they are about to do, and should *not* in these brief explanations discuss, for example, the situation, fishing uses, faults and fixes, casting mechanics or how to teach the cast.
- Casting direction will be at the discretion of the candidate. If conditions, change, the candidate may elect to change direction.
- Sub-Section 1A course layout: The targets will be placed on a measuring tape at the distances required by the examination tasks. The tape will be extended to 85 ft. (25.9m).
- Line length is measured from the caster's forward foot to the fly.

- Marking the fly line used in Sub-Section 1A beforehand is prohibited. The examiners will mark the line used in Sub-Section 1B with a waterproof marker at 50 ft. (15.2m) and 60 ft. (18.3m). A candidate choosing a different line for Sub-Section 1B may mark it for distance before the exam, subject to the examiners verifying the accuracy of the marking(s).
- A **false cast** is a forward cast followed by a back cast, both of which remain aerialized.
- A **casting stroke** is rotation and/or translation of the rod butt sufficient to cause loop formation. Every back cast is one casting stroke and every forward cast (including pickups in both cases) is one casting stroke.
- Definition of an **off-side cast**:
 - Right hand dominant casters, viewed from behind the caster on the caster-target line, casting with the rod tip to the observer's left of the caster's head.
 - The rod tip on the forward delivery cast of the Off-Side Spey cast (Task 18) must be to the observer's left of the caster's head.
 - For left hand dominant casters, a similar off-side definition applies, with right and left replacing each other.
 - Off-side casts may not be performed by using the non-dominant hand.
 - Bending at the waist to accomplish off-side casts is allowed.
 - Stance and style on off-side casts are at the caster's discretion.
 - An **on-side cast** is a cast which is not off-side.
- Neither hauling nor shooting line are permitted, unless otherwise specified in the task.
- When hauling is not permitted, the fly line will be held in the rod hand only, unless otherwise specified in the task.
- Various casting styles are permitted provided the cast or presentation meets the performance standards of the examination.
- During the teaching portion of the examination, an examiner will be available to serve as a student for the candidate. The candidate may utilize teaching aids only in Sections 2 and 3.
- The candidate may not use or refer to notes of any kind during the examination, be they either in written or electronic form.
- The loop size for all casts will be measured approximately 3 to 4 ft. (0.9m – 1.2m) back from the front of the nose of the loop.
- Unless specifically permitted by a task, elliptical (or Belgian/Gebetsroither) casts, Barnegat Bay casts (forward cast away from target, backcast to target), and Galway casts (forward cast away from, and off-side forward cast to target) are **not** allowed.
- Organizing the line before a task is performed may be done in any manner the candidate chooses, and the line organizing cast or casts will not be evaluated by the examiners.

General Performance Standards:

Candidates should successfully complete Performance tasks in no more than three attempts.

Explanations and demonstrations should be clear and concise.

Except when faults are to be demonstrated or identified, or where the task requires or allows otherwise, the following will apply to all Sections of the examination.

All loops, including the initial back cast will:

- Not be tailing.
- Have a relatively straight fly leg. *
- Have minimal slack in the rod leg.
- Be similar in size and shape between the forward and back casts. *
- Be approximately in-plane, making allowances for wind and gravity.
- Be approximately 3 ft. (0.9m) or less in width ("narrow loops"). *
- Be made so they can be easily seen by the examiners.

*** Asterisks indicate requirements which are not applicable to D Loops.**

Additional requirements include:

- Line tension will be maintained appropriately throughout the casting sequence.
- On delivery, the fly line and leader will unroll completely and be relatively straight.
- The line, leader, and fly will not make contact (tick) with the ground or water, except during the final delivery cast and as appropriate for on-water casts.
- Anchors and D Loops will be laid out relatively straight and tight in alignment with the forward cast and the target, observing the 180 degree principle for anchored casts.
- All overhead delivery casts will roll out above the ground.
- Please see "Anchor Position Guidelines" appended to this Exam.

Section 1 – Performance Tasks

Sub-Section 1A - Performance Tasks on Grass

Task 1. Overhead Casts: Demonstrate 6 false casts with narrow loops. Line length shall be 50 ft. (15.2m).

Required Performance Standards:

- General performance standards as previously described.

Explanation Completed and Matched Demonstration, if applicable	First Back Cast	Straight Fly Leg	Loop Size	Loop Size Similar Front and Back	Loops In-Plane	No Ticking	Required Performance Standards	Task Score P B F

Comments:

Task 2. Overhead Casts – Wide to Narrow Loops: Demonstrate casting a series of wide to medium to narrow loops. Line length shall be 50 ft. (15.2m).

- First backcast (pickup cast) will be wide.
- Three false casts for each loop size variation.

Required Performance Standards:

- General performance standards as previously described.
- There will be a distinct contrast between the specified loop sizes.
- Wide loops will be approximately 7-8 ft. (2.1-2.4m) or more, medium will be approximately 5-6 ft. (1.5-1.8m) and narrow loops will be approximately 3 ft. (0.9m) or less.
- The fly leg of the wide loops may be convex or straight (but not concave or tailing).

Explanation Completed and Matched Demonstration, if applicable	First Back Cast	Straight Fly Leg (Where Applicable)	Loop Size	Loop Size Similar Front and Back	Loops In-Plane	No Ticking	Required Performance Standards	Task Score P B F

Comments:

Task 3. Varying Rod Plane: Demonstrate a series of off-side false casts with the rod plane progressing from approximately 11 o'clock (30 degrees off vertical) to 10 o'clock and then to 9 o'clock (horizontal). A minimum of two false casts shall be performed at each position. Line length shall be 40 ft. (12.2m).

- The candidate may change the rod plane on either forward or back cast.

Required Performance Standards:

- General performance standards as previously described.

Explanation Completed and Matched Demonstration, if applicable	First Back Cast	Straight Fly Leg	Loop Size	Loop Size Similar Front and Back	Loops In-Plane Before and After Rod Plane Changes	No Ticking	Required Performance Standards	Task Score P B F

Comments:

Task 4. Slack-Line Waves: Demonstrate a slack line layout with narrow waves. Line length shall be 50 ft. (15.2m).

Required Performance Standards:

- General performance standards as previously described.
- Waves will be:
 - Similar in size and shape and aligned in the direction of the cast.
 - Approximately 2 ft. (0.6m) to 3 ft. (0.9m) in width, from point to point.
 - Relatively evenly distributed throughout the presentation, and
 - Include a minimum of 6 points.

Explanation Completed and Matched Demonstration, if applicable	First Back Cast	Straight Fly Leg	Loop Size	Loop Size Similar Front and Back	Loops Except on Delivery In-Plane	No Ticking	Required Performance Standards	Task Score P B F

Overall Task Score: _____

Comments:

Task 5. Mends Around Targets: Demonstrate three casts with aerial mends around targets at 15 ft. (4.6m), 25 ft. (7.6m), and 35 ft. (10.7m). Line length will be extended to a minimum of 50 ft. (15.2m) prior to starting the task. Each mend may be to the left or to the right of the target, at the examiners' option.

Required Performance Standards:

- General performance standards as previously described.
- Apex of mend may lay down approximately 2 ft. (0.6m) in front of or behind the target.
- Length of mended portion of fly line will not exceed approximately 20 ft. (6.1m).
- Width of mend should be no less than approximately 2 ft. (0.6m) for the 15 ft. (4.6m) and 25 ft. (7.6m) targets and no less than approximately 1 ft. (0.3m) for the 35 ft. (10.7m) target.
- Other than the mended portion, the line from rod tip to fly should be relatively straight and in alignment with the tape.

Explanation Completed and Matched Demonstration, if applicable	First Back Cast	Straight Fly Leg	Loop Size	Loop Size Similar Front and Back	Loops Except on Delivery In-Plane	No Ticking	Required Performance Standards	Task Score P B F
15 ft.								
25 ft.								
35 ft.								

Overall Task Score: _____

Comments:

Task 6. Curved Line Presentations – Left and Right: Demonstrate two curved line presentations, first to the left and then to the right around a target, making one presentation with a nearly horizontal rod plane and one with a nearly vertical rod plane. The examination team shall select which rod plane the candidate uses for each presentation. Line length shall be 45 ft. (13.7m).

Required Performance Standards:

- General performance standards as previously described.
- Elliptical, Barnegat Bay, and Galway casts, and hauling are allowed, and the fly line may be held in the line hand throughout the task.
- For the final delivery cast, any loop width, characteristic and shape which helps to accomplish the task is permitted.
- Line and/or leader will curve around a target located at 30 ft. (9.1m) with an angle change from the main body of the fly line of approximately 45 degrees or greater.
- Upon presentation the leader can be either straight or curved but should not have excessive slack.

Curve Direction	Explanation Completed and Matched Demonstration, if applicable	First Back Cast	Straight Fly Leg	Loop Size	Loop Size Similar Front and Back	Loops Except on Delivery In-Plane	No Ticking	Required Performance Standards	Task Score P B F
Left									
Right									

Overall Task Score: _____

Comments:

Task 7. Accuracy: Demonstrate on-side accuracy casting. Present the fly to targets at 40 ft. (12.2m), 30 ft. (9.1m), and 50 ft. (15.2m), in that order.

- Before beginning the task, the candidate will strip out line from the reel for 60 ft. (18.3m) to the fly and then strip the line back until the fly is at 30 ft. (9.1m).
- The candidate will extend or retrieve line as needed between targets only while false casting (except during the missed target procedure described below).
- The fly line may be held in the line hand throughout the task, and hauling is allowed.
- Shooting line, including on the final delivery cast, is permitted
- If on any attempt the target is missed:
 - For the 40 ft. (12.2m) target, line is retrieved until the fly is at 30 ft. (9.1m) before the next attempt.
 - For the 30 ft. (9.1m) target, line is extended until the fly is at 40 ft. (12.2m) before the next attempt.
 - For the 50 ft. (15.2m) target, line is retrieved until the fly is at 30 ft. (9.1m) before the next attempt.
- **A maximum of three attempts to each target is permitted.**

Required Performance Standards:

- General performance standards as previously described.
- Fly must land approximately 15 in. (38cm) or closer from the center of a cone or other marker for the 40 ft. (12.2m) and 30 ft. (9.1m) targets. Fly must land approximately 18 in. (46cm) or closer from the center of a cone or other marker for the 50 ft. (15.2m) target.
- The candidate will demonstrate appropriate trajectory for the target distances.

Explanation Completed and Matched Demonstration, if applicable	First Back Cast	Straight Fly Leg	Loop Size	Loop Size Similar Front and Back	Loops In-Plane	No Ticking	Required Performance Standards	Task Score P B F
40 ft.								
30 ft.								
50 ft.								

Overall Task Score: _____

Comments:

Task 8. Off-Side Accuracy: Demonstrate off-side accuracy casting to targets as described in Task 7.

- Task requirements and performance standards as described in Task 7 and the definition of off-side casting.

Explanation Completed and Matched Demonstration, if applicable	First Back Cast	Straight Fly Leg	Loop Size	Loop Size Similar Front and Back	Loops In-Plane	No Ticking	Required Performance Standards	Task Score P B F
40 ft.								
30 ft.								
50 ft.								

Overall Task Score: _____

Comments:

Task 9. Double Haul: Demonstrate double hauling while extending line from 45 ft. (13.7m) to 65 ft. (19.8m).

- Before beginning the task, the candidate will strip out line from the reel for a minimum of 70 ft. (21.3m) to the fly and then strip the line back until the fly is at 45 ft. (13.7m).
- The candidate will commence with two false casts at 45 ft. (13.7m), extend the line evenly over a minimum of 4 false casts and complete the tasks with 2 false casts at 65 ft. (19.8m) before laying the line down at 65 ft. (19.8m).
- The candidate has the option to extend line on the back cast, the forward cast, or both.

Required Performance Standards:

- General performance standards as previously described.
- Haul length, timing, and force application should vary appropriately with the length of line carried.
- Line tension will be maintained between hauling hand and the first rod guide.

Explanation Completed and Matched Demonstration, if applicable	First Back Cast	Straight Fly Leg	Loop Size	Loop Size Similar Front and Back	Loops In-Plane	No Ticking	Required Performance Standards	Task Score P B F

Comments:

Task 10. Distance Cast: Demonstrate a cast to a minimum of 85 ft. (25.9m).

- Casting series must consist of at least two false casts prior to presentation.
- Shooting line is permitted.
- Hauling is permitted.
- Caster will begin the task with the fly no farther than 60 ft. (18.3m).

Required Performance Standards:

- General performance standards as previously described.
- The first back cast will exhibit no more than an approximately 3 ft. (0.9m) loop width. Loop width on the subsequent casts can exceed 3 ft. (0.9m).
- The fly must land beyond the end of the fly line with the leader relatively straight.

Explanation Completed and Matched Demonstration, if applicable	First Back Cast	Straight Fly Leg	Loops In-Plane	No Ticking	Required Performance Standards	Task Score P B F

Comments:

Task 11. Off-Side or Back-Cast Distance Cast: At the candidate's option, demonstrate either an off-side cast or back-cast to a minimum of 75 ft. (22.9m).

- For both options the line shall be laid out in the direction of the delivery cast prior to starting the task.
- Caster will begin with fly no farther than 60 ft. (18.3m).
- Casting series must consist of a minimum of 4 casting strokes.
- Shooting line is permitted.
- Hauling is permitted.
- Galway casts (forward cast away from target, off-side forward cast to target) and Barnegat Bay casts are permitted.

Required Performance Standards:

- General performance standards as previously described.
- The pickup cast will exhibit no more than an approximately 3 ft. (0.9m) loop width. Loop width on subsequent casts can exceed 3 ft. (0.9m).
- The fly must land beyond the end of the fly line with the leader relatively straight.

Explanation Completed and Matched Demonstration, if applicable	Pickup Cast	Straight Fly Leg	Loops In-Plane	No Ticking	Required Performance Standards	Task Score P B F

Comments:

Task 12: Quick Cast from a Skiff: Demonstrate a quick cast from a moving skiff, shooting line to 65 ft. (19.8m).

- Line will be organized and managed so that it does not tangle.
- The casting sequence will begin with no more than two rod lengths of fly line outside the rod tip.
- Fly will be held in hand before the start of the cast.
- Before the casting sequence begins, the candidate will choose the direction in which the bow of the (imaginary) boat is pointing, and the examiners will then announce the location of the target using a clock system based on the boat's bow pointing to 12 o'clock. The target shall be between 9 and 11 o'clock for right hand dominant casters and between 1 and 3 o'clock for left hand dominant casters, and the candidate will maintain visual contact with the target during the cast.
- Presentation must be made with no more than two false casts.
- Shooting line is permitted.
- Hauling is permitted

Required Performance Standards:

- General performance standards as previously described.

Explanation Completed and Matched Demonstration, if applicable	Straight Fly Leg	Loop Size	Loop Size Similar Front and Back	Loops In-Plane	No Ticking	Required Performance Standards	Task Score P B F

Comments:

Sub-Section 1B - Performance Tasks on Water

Back loops of any size and shape may be used at the candidate's option for the tasks in this Sub-Section 1B (subject to task requirements), and the generic term "D Loop" is used in this examination to describe the back loop of any anchored cast. Wading depth will be determined by the examiners in consultation with the candidate, taking into account the safety of all participants. It is recommended, however, that the candidate stand in at least approximately 6 in. (0.15m) of water.

Task 13. Roll Cast, Dominant Side: Demonstrate a roll cast to 50 ft. (15.2m). Hauling is not permitted. Shooting line is permitted.

- The fly may not leave the water during D Loop formation, but the line may continue moving backwards when the delivery cast begins.
- Stepping forward or backward during the task is not permitted.

Required Performance Standards:

- General performance standards as previously described.

Explanation Completed and Matched Demonstration, if applicable	D Loop Set-up and Alignment	Anchor Placement and Alignment	Straight Fly Leg on Delivery	Delivery Loop Size	Delivery Loop In-Plane	Required Performance Standards	Task Score P B F

Comments:

Task 14. Switch Cast, Dominant Side: Demonstrate a switch cast to 60 ft. (18.3m). Hauling and shooting line are permitted.

- The initial lift and D Loop sweep prior to placement of the anchor must completely lift the fly line, leader, and fly off the water.
- Initial line length is at the discretion of the candidate.
- No change of direction is permitted.
- Dragging or skipping the anchor into position is not permitted.

Required Performance Standards:

- General performance standards as previously described.

Explanation Completed and Matched Demonstration, if applicable	D Loop Set-up and Alignment	Anchor Placement and Alignment	Straight Fly Leg on Delivery	Delivery Loop Size	Delivery Loop In-Plane	Required Performance Standards	Task Score P B F

Comments:

Task 15. Single Spey Cast, Dominant Side: Demonstrate a single Spey cast with a minimum change of direction of 45 degrees to 60 ft. (18.3m). Hauling and shooting line are permitted.

- Initial line length is at the discretion of the candidate.
- Dragging or skipping the anchor into position is not permitted.

Required Performance Standards:

- General performance standards as previously described.

Explanation Completed and Matched Demonstration, if applicable	D Loop Set-up and Alignment	Anchor Placement and Alignment	Straight Fly Leg on Delivery	Delivery Loop Size	Delivery Loop In-Plane	Angle Change	Required Performance Standards	Task Score P B F

Comments:

Task 16. Double Spey or Snap Cast, Dominant Side: The examiners will select which cast is to be performed. If a Snap Cast is selected, the candidate may do a Snap of their choice (including a Circle C). Demonstrate the cast with a change of direction of 90 degrees to 60 ft. (18.3m). Hauling and shooting line are permitted.

- Initial line length is at the discretion of the candidate.

Required Performance Standards:

- General performance standards as previously described.

Explanation Completed and Matched Demonstration, if applicable	D Loop Set-up and Alignment	Anchor Placement and Alignment	Straight Fly Leg on Delivery	Delivery Loop Size	Delivery Loop In-Plane	Angle Change	Required Performance Standards	Task Score P B F

Comments:

Task 17. Snake Roll Cast, Dominant Side: Demonstrate a snake roll cast with a 90 degree change of direction to 60 ft. (18.3m). Hauling and shooting line are permitted.

- Dragging or skipping the anchor into position is not permitted.
- Initial line length is at the discretion of the candidate.

Required Performance Standards:

- General performance standards as previously described.

Explanation Completed and Matched Demonstration, if applicable	D Loop Set-up and Alignment	Anchor Placement and Alignment	Straight Fly Leg on Delivery	Delivery Loop Size	Delivery Loop In-Plane	Angle Change	Required Performance Standards	Task Score P B F

Comments:

Task 18. Off-Side Spey Cast: Demonstrate an off-side Spey cast with a change of direction of 90 degrees to 55 ft. (16.8m). If a double Spey cast was performed in Task 16, the candidate will perform an off-side Snap cast of their choice (including a Circle C); if a Snap cast was performed in Task 16, the candidate will perform an off-side double Spey. Hauling and shooting line are permitted.

- Initial line length is at the discretion of the candidate.

Required Performance Standards:

- General performance standards as previously described and off-side casting definition.

Explanation Completed and Matched Demonstration, if applicable	D Loop Set-up and Alignment	Anchor Placement and Alignment	Straight Fly Leg on Delivery	Delivery Loop Size	Delivery Loop In-Plane	Angle Change	Required Performance Standards	Task Score P B F

Comments:

Section 2 – Teaching

The MCI Examination Teaching Performance Section contains six tasks designed to assess the candidate's ability to give organized, clear, and concise instruction to students using appropriate terminology (based upon the student levels described below) and a clear understanding of casting mechanics. The candidate's teaching demonstrations are expected to present a logical teaching progression that, where appropriate, addresses multiple learning styles. Candidates are expected to be engaging, student-centered, confident, and professional in their teaching demonstrations. Teaching tasks focus on intermediate to advanced level students.

Each teaching task should be completed briefly and succinctly in at most approximately 3 to 5 minutes, except Task 6 (Teach an Instructor), which may require some additional time. One of the examiners will be available to serve as a student for instructional purposes, should the candidate choose to teach some or all tasks to a student. A student must be taught in Task 5. Except in the Teach an Instructor task, candidates are encouraged not to address or fix faults not actually exhibited by their student. They should instead either just make the appropriate correction, or if performing the task without a student, teach a suitable way to perform the cast.

The candidate will teach the choices within each task (and unless specifically stated, the options within each such choice), both as determined by the examiners.

Candidates will be asked to perform *five* of the six teaching tasks: Tasks 1 and 2, *two* of Tasks 3, 4, and 5 as selected by the examiners, and finally Task 6, Teach an Instructor.

Definitions for the Teaching Tasks:

Intermediate Student: Has a basic understanding of casting mechanics and has moderate loop control, can single and double haul, shoot line, and cast in different planes, but requires additional instruction to improve these skills.

Advanced Student: Has the skill level of a successful CI candidate.

Candidates should assume that students have the skills required to learn the tasks they are being taught. Line length and angle changes in this Section 2, where applicable, are at the discretion of the candidate.

Scoring of Teaching Tasks:

Teaching tasks will be scored using the four domains scorecard below, with candidate performance for each domain noted in the P-B-F scoring system used for casting performance tasks. However, the final score for each task is noted as either P (pass) or F (fail). Within each teaching task, a fail score in a single domain (or two borderline scores in two domains) constitutes an F (fail) for that task. A successful candidate may not fail any of the teaching tasks.

Performance Standards for the Teaching Tasks:

Teaching performance is expected to meet the standards established in the four domains of teaching as follows:

Communication Effectiveness	Content Knowledge	Teaching Methodology	Teaching Style
• Clear and Concise • Organized • Awareness of Student Progress (monitoring and adjusting)	• Appropriate Terminology • Understanding of Casting Mechanics	• Logical Progression • Breaks into Steps • Addresses Multiple Learning Styles (where appropriate)	• Engaging • Student Centered • Confident • Professional

Task 1. Spey Casting:

The candidate is required to teach one of the following tasks selected by the examination team:

- A. How to perform a switch cast to an advanced student.
- B. How to perform a single Spey cast to an advanced student.
- C. How to perform a Snap cast of the candidate's choice to an advanced student.

Communication Effectiveness	Content Knowledge	Teaching Methodology	Teaching Style	Teaching Task Pass/Fail
P B F	P B F	P B F	P B F	P F

Comments:

Task 2. Fault Demonstration and Correction:

The candidate is required to (i) demonstrate **two** of the following faults as selected by the examination team and to (ii) explain and demonstrate the appropriate corrections. The candidate must pass both selected fault tasks.

A. Water - One of:

- a. Single Spey cast with a bloody L pointing away from the caster (upstream) or skipped anchor at the examiners' choice.
- b. Snap cast of candidate's choice, where anchor placement is too far upstream or downstream at the examiners' choice.

Fault Demonstration Task #1: _____

Proper Demonstration of Fault	Cause Properly Defined	Correction Properly Defined	Explanation Clear and Concise	Teaching Task Pass/Fail
P B F	P B F	P B F	P B F	P F

Comments:

B. Grass – One of

- a. After false casting with narrow loops, making an overpowered delivery cast with too wide an arc caused by a too low forward stop, resulting in a wide loop which falls short of the target ("Last Cast Syndrome").
- b. Tailing loop created by a haul.

Fault Demonstration Task #2: _____

Proper Demonstration of Fault	Cause Properly Defined	Correction Properly Defined	Explanation Clear and Concise	Teaching Task Pass/Fail
P B F	P B F	P B F	P B F	P F

Comments:

Task 3. Loop Control:

The candidate is required to teach one of the following tasks selected by the examination team:

- A. How to false cast narrow loops to an intermediate student.
- B. How to cast wide, medium, and narrow loops to an advanced student.
- C. How to vary the rod plane while casting off-side from near vertical to horizontal to an intermediate student.

Communication Effectiveness	Content Knowledge	Teaching Methodology	Teaching Style	Teaching Task Pass/Fail
P B F	P B F	P B F	P B F	P F

Comments:

Task 4. Presentation Casting:

The candidate is required to teach one of the following tasks selected by the examination team:

- A. How to cast an aerial mend around a target to an advanced student.
- B. How to cast a curved line presentation around a target to an advanced student.
- C. How to cast slack-line waves to an intermediate student.

Communication Effectiveness	Content Knowledge	Teaching Methodology	Teaching Style	Teaching Task Pass/Fail
P B F	P B F	P B F	P B F	P F

Comments:

Task 5. Distance Casting:

The candidate is required to teach one of the following tasks selected by the examination team:

- A. How to improve an advanced student's double hauling.
- B. How to help an advanced student cast further.

The task will begin with an examiner acting as a student demonstrating either double hauling or a distance cast, and the candidate will then be expected to make the appropriate recommendations for improvement.

Communication Effectiveness	Content Knowledge	Teaching Methodology	Teaching Style	Teaching Task Pass/Fail
P B F	P B F	P B F	P B F	P F

Comments:

Task 6. “Teach an Instructor” to Teach a Task from the CI Examination:

The candidate is required **to teach a CI candidate** how to successfully teach an intermediate student a task selected by the examiners from the performance section of the CI examination. The expectation of this task is that the candidate demonstrates his or her ability to convey teaching skills to an instructor, so the instructor can teach the chosen task to others. All MCI candidates are expected to be very familiar with the current version of the CI exam, which can be found [here](#).

The “Teach an Instructor” task should be completed in approximately 5 to 7 minutes. In contrast to other teaching tasks, expectations for this task include common faults and fixes, and where applicable more than one way of teaching the cast to address different learning styles.

Teaching Task: _____

Communication Effectiveness	Content Knowledge	Teaching Methodology	Teaching Style	Teaching Task Pass/Fail
P B F	P B F	P B F	P B F	P F

Comments:

Section 3: Discussion

After the candidate passes **Section 2**, the examiners will conduct **Section 3 (Discussion)**. This is an instructor-to-instructor dialogue with the candidate that explores the candidate's depth of knowledge on the topics listed below (in descending priority order):

- Fly casting principles and mechanics.
- Teaching and instructional methods.
- Fault recognition, diagnosis, and corrections.
- Fly fishing equipment.
- Fly fishing techniques.
- Etiquette while fly fishing, including on-stream, wading, and fishing from boats.

Examiners will ask the candidate to discuss up to six topics. At most four of these topics will come from the [MCI Discussion Topics](#) list, which covers the topics above. Examiners may raise up to two additional topics that are relevant to the candidate's exam performance.

Performance Standards: The candidate is expected to demonstrate substantial knowledge and understanding based on both the available fly casting and fishing literature and his or her own experience. The candidate's responses should be clear and concise, demonstrate appropriate depth of knowledge, and explain complex topics simply both for students and for other instructors. Finally, a candidate must have confidence in his or her viewpoints and be prepared to support them as needed. Examiners will score this Section in aggregate as a Pass or Fail.

Comments:

Anchor Position Guidelines

Diagram A is a generalized snapshot of the anchor and D loop placement after D loop formation.

Anchor: The fly and leader/fly line in contact with the water at the bottom of the D Loop (Point P to the fly). The dashed curved line in Diagram A represents an anchor that is acceptable as relatively straight.

Connection Point: The line/leader or line/sink tip connection.


Point P: The point where the fly line suspended from the rod tip first touches the water. Point P moves during the casting sequence, as well as during the initial lift (Diagram C).

Anchor Placement Zone: Area within which the majority of the anchor should normally be placed (Diagrams A and B).


Extended Anchor Placement Zone: Area in front of the anchor placement zone used for locating the front portion of the anchor when adjusting for limited back space for the D Loop (Diagram A).

90-Degree Line: An imaginary line centered on the caster and perpendicular (90 degrees) to the target direction.


A) Anchor placement after D Loop formation

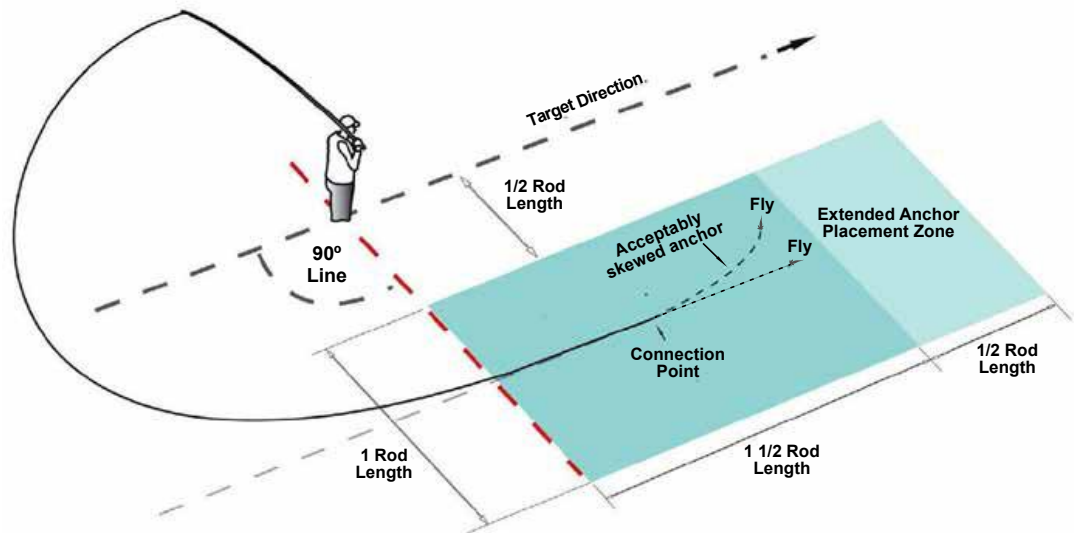


B) Line placement in a Sustained Anchor or Two-Stage Cast prior to the sweep and formation of the D loop

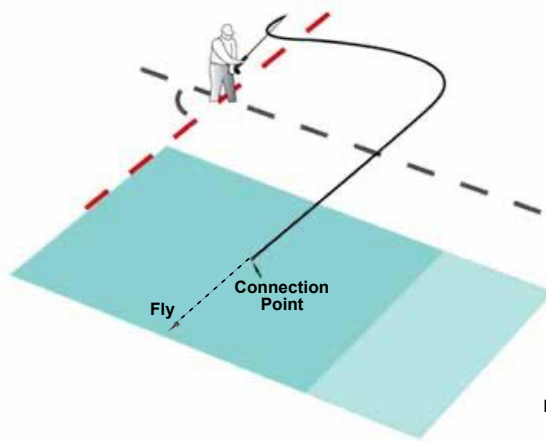


C) Point P moves away from the caster during a lift

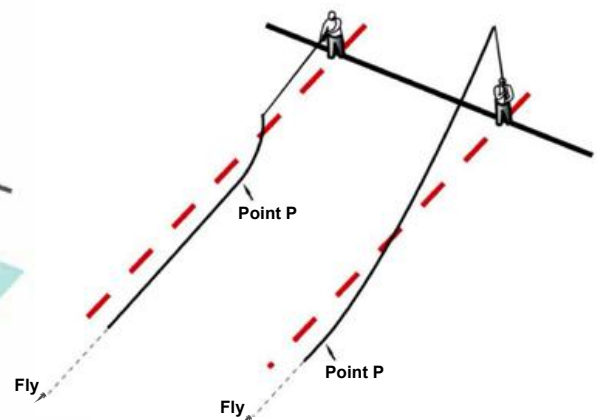

- Diagrams are representative in nature and do not necessarily show how all presentations may be made.
- Diagrams are for examiners and candidates to understand the general profile of certain presentations and casts.

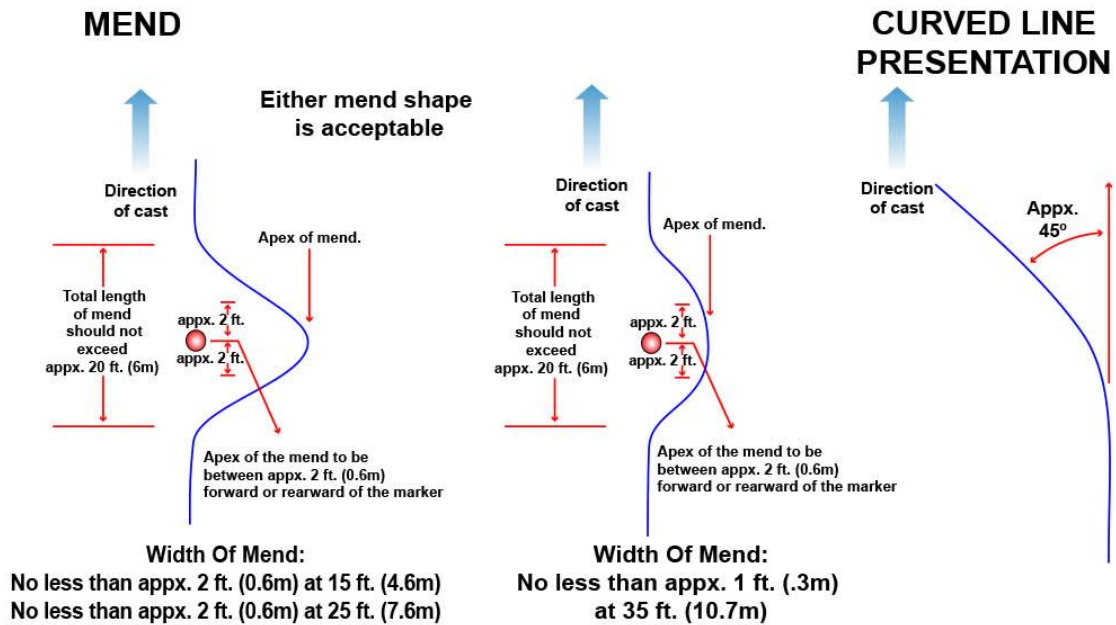

WAVES

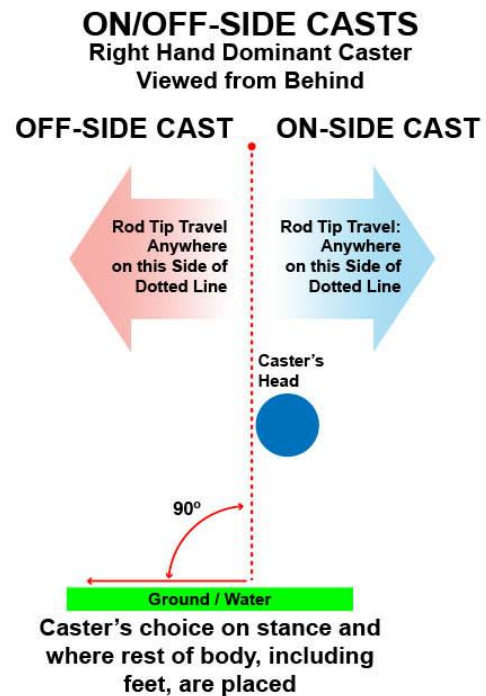

Diagrams by Bintoro FFI CI & THMCI