



Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs


Pinout

Pinout view

System view

Categories A->Z

- System Core >
- Analog >
- Timers >
- Connectivity >
- Computing >
- Middleware and Software Packs >

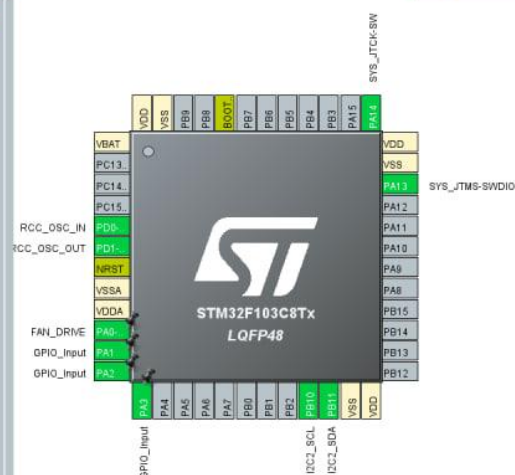



Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search

Categories A->Z

System Core >

Analog >

Timers >

Connectivity >

CAN

I2C1

☒ I2C2

SPI1

SPI2

USART1

☒ USART2☒ USART3

USB

Computing >

Middleware and Software Packs >

I2C2 Mode and Configuration

Mode

I2C I2C

Configuration

Reset Configuration

DMA Settings

GPIO Settings

Parameter Settings

User Constants

NVIC Settings

Configure the below parameters :

Search (Ctrl+F)

Master Features

I2C Speed Mode Standard Mode

I2C Clock Speed (Hz) 100000

Slave Features


Clock No Stretch Mode Disabled

Primary Address Leng... 7-bit

Dual Address Acknowled Disabled

Pinout view

System view

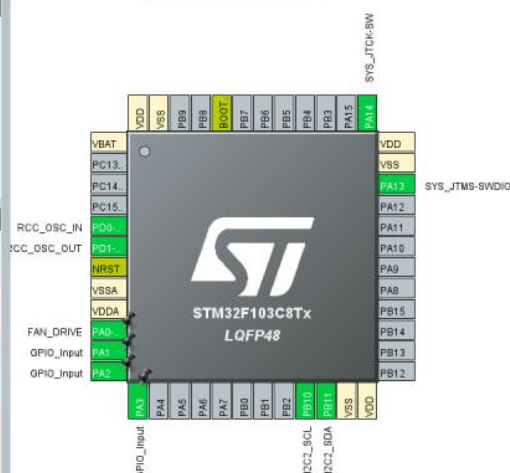

Windows taskbar showing search bar, taskbar icons (including File Explorer, Edge, Chrome, Firefox, and Mail), system tray (showing weather, date, and time).

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

TIM3 Mode and Configuration

Mode

Slave Mode	Disable
Trigger Source	Disable
☒ Internal Clock	
Channel1	Disable
Channel2	Disable

Configuration

Reset Configuration

☒ NVIC Settings	☒ DMA Settings		
☒ Parameter Settings	☒ User Constants		
NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
TIM3 global interrupt	☒	0	0

Pinout view

System view

