

Phone Covers

Measured decorative panels for compatible rigid cases

Read before making or selling

Original written development patterns based on the visual themes in your shop. These instructions have not been physically crocheted or independently tested. They do not reproduce the reference images stitch-for-stitch. Dimensions, yarn use and visual results are provisional.

For maker testing and revision. Do not describe this edition as tested, photo-verified or a guaranteed match to the marketing images. Vector construction diagrams accompany the instructional stages. They are schematic, not to scale, and are not photographs of a tested sample.

Inside this file

02-A Cat | 02-B Horse | 02-C Panda | 02-D Red cloud

Language: English | Terminology: US crochet | Version: 0.2

Before you begin

How to read this edition

Read the entire project first. Each round starts at the stitch marker; move the marker after every round. Work in a continuous spiral unless the instructions explicitly say to join. A number in brackets is the stitch count after completing the row or round.

Work into both loops unless stated otherwise. A turning ch 1 is not counted as a stitch. In flat rows, ch 1 and turn after each row except the last. Fasten off means cut a sewing tail, pull it through the final loop and tighten.

US sc = UK dc; US hdc = UK htr; US dc = UK tr. All instructions in these books use US names.

Abbreviations

ch: chain; sl st: slip stitch; sc: single crochet; hdc: half double crochet; dc: double crochet; st/sts: stitch/stitches; MR: magic ring; inc: 2 sc into one stitch; dec: single-crochet two stitches together; BLO: back loop only; FLO: front loop only. (2 sc, inc) x 6 consumes 18 stitches and makes 24.

Making the stitches



Chain: yarn over and pull through the loop on your hook. Single crochet: insert hook, yarn over and pull up a loop; yarn over and pull through both loops. Slip stitch: insert hook, yarn over and pull through the stitch and the loop on your hook together.

Half double crochet: yarn over, insert hook, yarn over and pull up a loop; yarn over and pull through all three loops. Double crochet: yarn over, insert hook, pull up a loop; yarn over and pull through two loops, then repeat through the remaining two.

Decrease: insert hook into the next stitch and pull up a loop; insert into the following stitch and pull up a loop; yarn over and pull through all three loops. For an invisible decrease in amigurumi, insert through the front loops of the next two stitches, draw yarn through those two loops, then yarn over and draw through the two loops on the hook.

Magic ring and colour changes

Wrap yarn around two fingers, insert the hook under the ring, pull up the working yarn and ch 1. Work the instructed sc into the ring and pull the tail firmly to close. Secure that tail on the inside. To change colour, complete the last pull-through of the previous stitch with the new colour; weave tails into the wrong side.

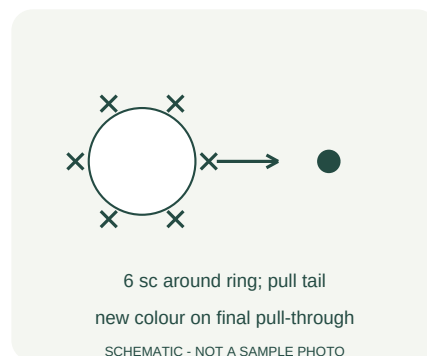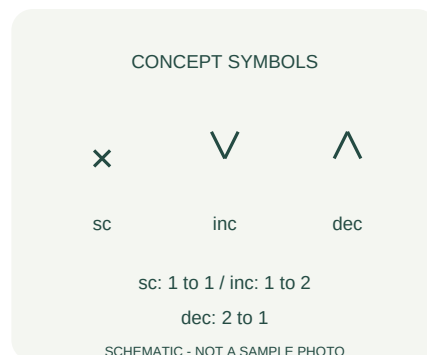

Measure your actual phone case

What this pattern makes

A decorative crochet back panel attached to an existing compatible rigid case with a perforated craft border. It is not a standalone protective phone case, and no impact, heat, charging or specific phone-model compatibility is claimed. The reference images show more elaborate fitted covers; this draft uses a practical flat-panel construction.

Materials

DK cotton in chosen colours; 2.5 mm starting hook; tapestry needle; markers; paper template; ruler; an existing craft-ready case with sewing holes around a border that clears all controls. Obtain the correct case for your actual device. Do not drill a phone or improvise holes close to the device. Remove the phone while fitting or sewing.

Measure and swatch




Trace the flat back area inside the sewing border. Mark camera, flash and all openings. Measure usable width W and height H in cm. Swatch at least 12 x 12 cm in sc, measure the central 10 cm. Let S = stitches per cm and R = rows per cm. Target $N = \text{round}(W \times S)$ stitches and $M = \text{round}(H \times R)$ rows. These are starting counts; compare fabric to template frequently without stretching.

Worked example - not a device specification

For $W=7$ cm, $H=14$ cm and gauge $S=2.4$, $R=2.6$: $N=17$ stitches, $M=36$ rows. This is only a sample rectangle. A camera opening needs separate measurements; do not assume the sample fits any named phone.

Order


Make the panel and camera opening. Fit to empty case. Make embellishments; sew them to panel. Finally sew panel to the case through existing craft holes. Keep yarn clear of camera/flash, ports, microphone, buttons, screen edge and ventilation areas.

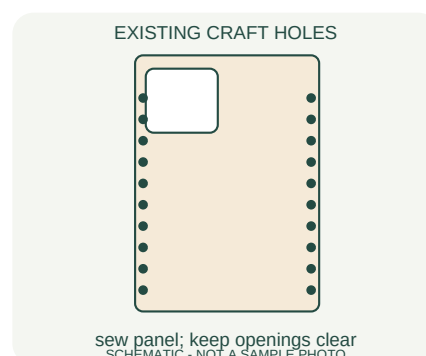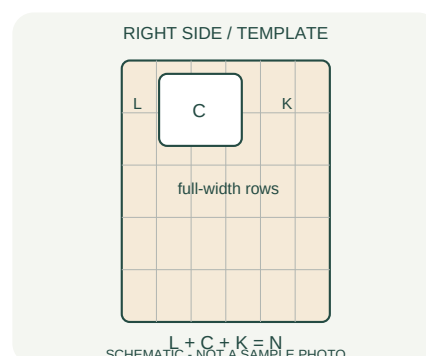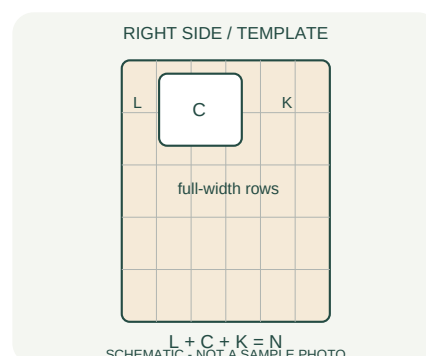

Back panel with a camera window


Basic rectangle

Ch N+1. Row 1: sc in second ch and across (N). Rows 2-M: ch 1, turn, N sc, except rows assigned to the camera window. Check width after Row 3 and height every 5 rows. Remake counts if fit differs from the template.

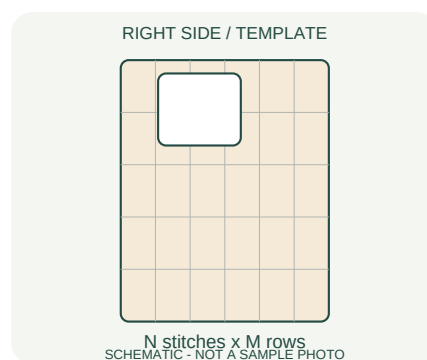

Plan the opening


From panel bottom, measure where the camera opening starts and ends. Convert to row numbers using R. Mark the right side and the camera side on both the paper and fabric before splitting rows. Choose a bottom full row b below the opening and the number g of rows in the opening. Choose L stitches to its left and K stitches to its right, leaving $C=N-L-K$ missing stitches. Require L and K at least 2 and C at least 1. Add clearance on the template; round the opening outward. If the opening reaches the panel edge, use the edge-notch option below.

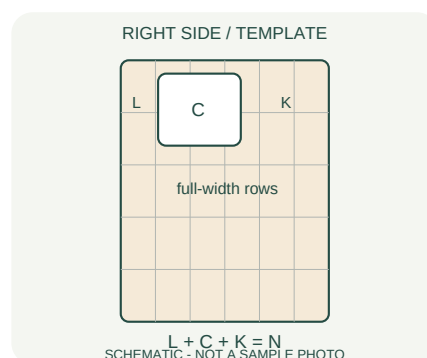

Back panel with a camera window / continued


Worked internal window

For $N=17$, $L=3$, $C=8$, $K=6$, $b=24$ and $g=9$: work 24 full rows. At the next row make only 3 sc and turn; work a total of 9 rows of 3 sc for the first rail, then fasten off. Join yarn at the opposite outer edge of Row 24 and work the other rail across its 6 stitches, turning for 9 rows; fasten off. Both rails must finish at the same height. Lay the piece right-side up on the original template before bridging; check that the opening is on the correct side.

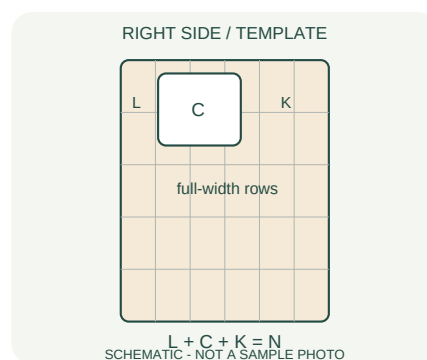


Bridge above window

With right side facing, join at the outer edge of one rail. Sc across that rail, ch C , sc across the other rail. In the example: 3 sc, ch 8, 6 sc (17 positions). Turn; sc in every sc and each chain (17). This bridge is Row $b+g+1$ (34 in example). Continue to Row M (36). Choose the starting edge and rail order from the visible right side so the window is not mirrored.

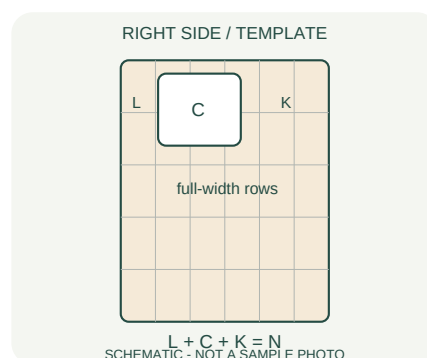

Edge-notch option


If camera window reaches the top, omit bridge and end the two rails at M . If it reaches a side edge, work a single narrow rail after row b , ending at M ; leave the entire camera-side region open. Do not run yarn across lenses. Trace and refit before final attachment.

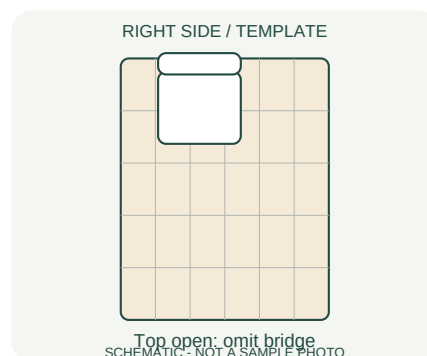

Shared applique modules


Small round patch

MR 6; R2 inc x 6 (12). Fasten off, flatten and leave tail. Use for cheeks, panda eye patches or small spots.

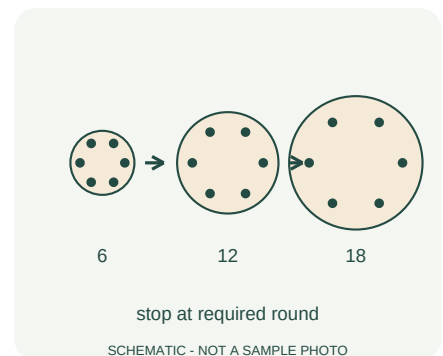


Large round patch

MR 6; R2 inc x 6 (12); R3 (sc, inc) x 6 (18). Fasten off and flatten. Use for muzzle or layered cloud shapes.

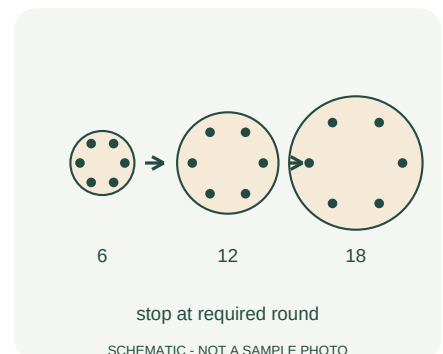

Small padded paw


MR 6; R2 (sc, inc) x 3 (9); R3-R4 9 sc; R5: 7 sc, dec (8). Add a pinch of stuffing, flatten open edge and seam across 4 paired stitches. Make two in design colour. Sew all around outer edge so paws do not swing.

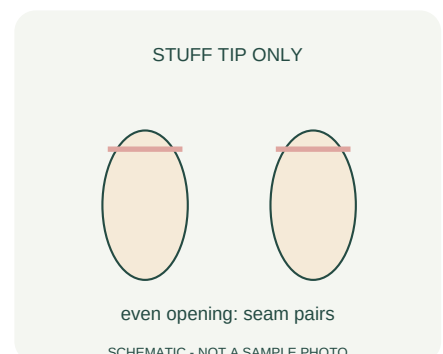

Shared applique modules / continued

Triangle ear

Ch 2. Row 1: 2 sc in second ch (2). Row 2: inc x 2 (4). Row 3: inc, 2 sc, inc (6). Row 4: inc, 4 sc, inc (8). Fasten off. Sew the 8-stitch base and lower sides to panel. For pink inner ear repeat only Rows 1-2 and sew inside.




sew base to head or panel

SCHEMATIC - NOT A SAMPLE PHOTO

Round ear

MR 6; R2 inc x 6 (12); R3 12 sc. Flatten without stuffing and sew bottom half to panel; upper half stays rounded. Keep ears away from camera and flash.




12-stitch cup

flatten

SCHEMATIC - NOT A SAMPLE PHOTO

Leaf

Ch 6. Starting in second chain: sl st, sc, hdc, sc, sl st (5). Fasten off and sew along centre line. Scarf: ch 25; sc back across 24; sew around motif with both ends fixed.




sl st / sc / hdc / sc / sl st

SCHEMATIC - NOT A SAMPLE PHOTO

Placement grid

Use only the solid rectangle below the camera opening. Measure its height A. Put eye centres around $0.30 \times A$ from its top, muzzle around $0.45 \times A$, paws around $0.65 \times A$. Place eyes one third and two thirds across panel width. Pin first; scale or omit details if they crowd the opening.



A = solid height below camera
SCHEMATIC - NOT A SAMPLE PHOTO


02-A | Cat phone-case panel

Reference and colours

CYRUS8: cream base, grey patches, charcoal stripes, pink nose/inner ears. Use the measured panel from this book. Its result will be simpler than the rendered marketing reference.

Make pieces

Make two grey triangle ears with pink inner triangles, two cream padded paws and 4 grey small round patches. Make a tail: charcoal MR 6; work 14 more rounds of 6 sc, changing to grey for R3-R5, R8-R10 and R13-R15. R16: 6 sc. Stuff lightly; flatten opening and seam across 3 paired stitches.

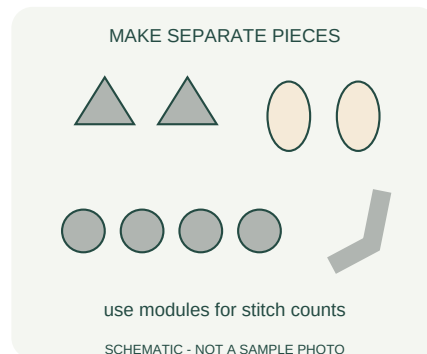


Arrange

Sew ears near upper left/right edges wherever camera permits. Sew paws below the face and patches on the solid lower panel. Embroider eyes in black with small white highlights, a pink nose and a black Y-shaped mouth. Embroider three flat whiskers each side and short charcoal stripes over patches.



Attach tail

Curve tail along one side of the panel. Sew it down continuously rather than leaving a loop or projection that catches. Keep edges and phone controls unobstructed. Fit to empty case, then use the attachment checklist.

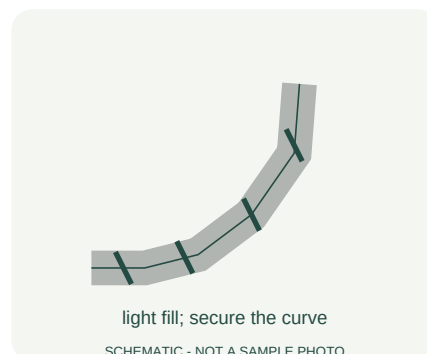


02-B | Horse phone-case panel

Reference and colours

CYRUS9: cream panel, brown mane and paws, pink inner ears, green scarf.

Make pieces

Two cream triangle ears with pink centres; one cream large round muzzle; two brown padded paws; one green scarf strip. Mane strands: make 10 brown strips, each ch 13 then sl st across 12 chains. For a longer side mane make 5 additional strips with ch 21 then 20 sl st.

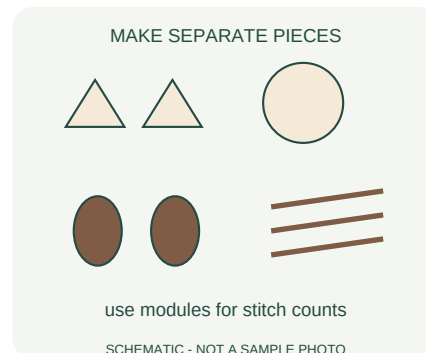


Arrange

Sew muzzle at face centre and embroider two brown nostrils on it. Embroider eyes above muzzle, with pink cheek stitches at each side. Sew ears to top panel corners only if they clear camera/flash. Layer short mane diagonally above the eyes; stitch long strands flat down one side.



Scarf and paws

Place scarf below muzzle, cross ends and sew every section flat. Attach brown paws either side below scarf. Embroider a gold circle as a button instead of adding a detachable button. Keep face and mane within the solid back area; resize by removing strands if necessary.

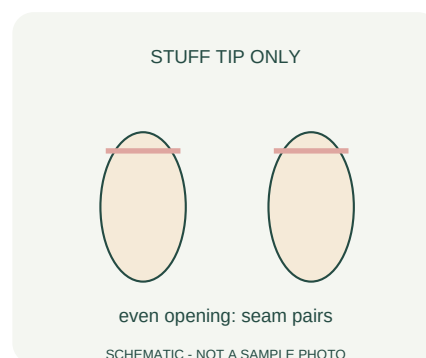

02-C | Panda phone-case panel

Reference and colours

by-cyrus-4: cream panel, black ears/patches/paws, green bamboo, pink cheeks.

Make pieces



Two black round ears; two black small round eye patches; two black padded paws; two green leaves. Bamboo stalk: ch 16, sc across 15, work one more row of 15 sc. Fasten off; this is a flat strip, not a stuffed tube.

Arrange

Sew eye patches slightly diagonally above embroidered nose. Add white eye highlights on the black patches, and a short black mouth below nose. Sew ears where camera allows. Add pink cheek stitches outside eye patches.

Bamboo detail

Sew stalk vertically between paws; use pale green horizontal stitches at three points as segments. Sew leaves angled from stalk and secure tips. Attach paws overlapping sides of stalk. Avoid placing raised pieces where they prevent a secure grip or camera clearance.

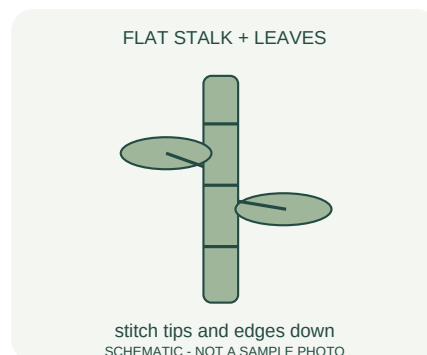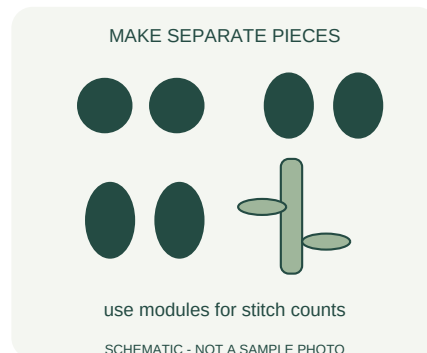


02-D | Red-cloud phone-case panel

Reference and palette

by-cyrus-3: red, black and cream. This edition uses a striped back and an original simplified cloud applique, not an exact recreation of the pictured logo or diagonal texture.


Panel stripes

Work measured panel as written, using black for Rows 1-2, red Rows 3-4, then repeat 2 black/2 red rows. Continue the row-colour sequence on both window rails. Weave in ends; do not carry yarn across the camera opening.

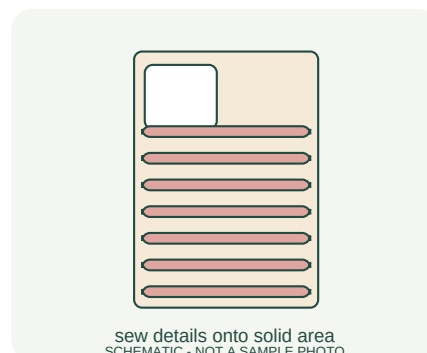


Cloud applique

Make three red small round patches (12 sts each) and one red large round patch (18 sts). Overlap the three small circles along the top of the large circle to create a lobed cloud. Whipstitch overlaps invisibly on the back. With cream yarn, embroider a running outline along the outside perimeter after attaching cloud to panel.

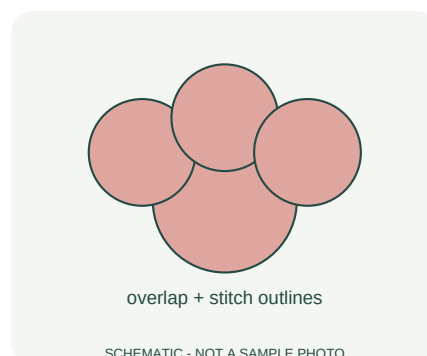

Finish


Place cloud in centre of solid lower panel. Sew all edges securely. Omit the reference metal plate, external charm and chain: this pattern supplies only yarn details. Check that red yarn does not bleed onto the cream yarn when gently dampened.

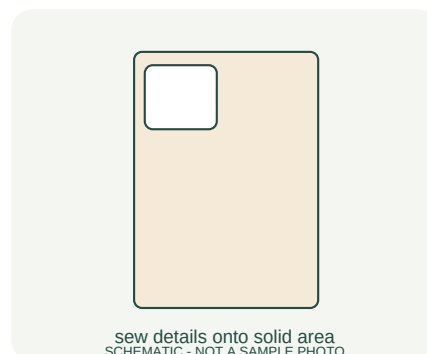

Case fitting and release checklist


Attach

Use a doubled length of matching cotton and sew through existing craft holes and the panel edge. Start at four corners, then distribute remaining sewing evenly. Use short stitches, not long floats. Tie securely on the outer back beneath the panel; no knots or hard parts against the phone.

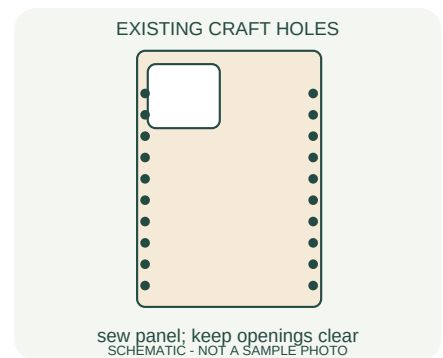

Functional checks

Test on the empty case first, then install phone briefly. Confirm camera and flash have no yarn in their field; check buttons, microphone, charging cable and case retention. Remove cover for charging if it interferes or traps heat. Do not claim drop protection or wireless-charging compatibility from appearance.

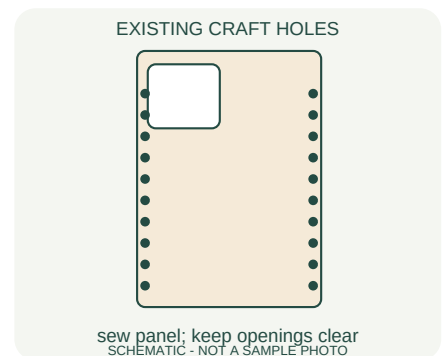

Measurements to record

Device and rigid case model: _____. W/H: _____. Swatch S/R: _____. N/M: _____. Window b/g/L/C/K: _____. Samplemaker/date: _____. Corrections: _____.

Customer edition requirements

Provide verified device/case measurements, finished sample photos, actual yarn amount and a clear statement that a compatible rigid craft case is required. Do not use the iPhone model claims printed in the reference images as tested specifications.

Samplemaker record and sources

Release gate

Each included design must be made from the written instructions by someone other than the writer. Record every deviation and resolve ambiguities. No sample has been made for this edition.

Record

Pattern ID: _____ Maker/date: _____ Yarn brand/fibre/weight: _____ Hook: _____
Gauge stitches/rows per 10 cm: _____ Finished height/width/depth: _____ Actual
yarn weight per colour: _____

Checks

Count each round; record any mismatch. Confirm colour changes, face position, garment fit, joining instructions and assembly order. Take front, back, side and close-up photographs. Check that the result supports the exact product-page promise. Record the corrected version and date before removing DRAFT labels.

Reference standard

US abbreviation and reading conventions checked against the Craft Yarn Council:

<https://craftyarnCouncil.com/standards/crochet-abbreviations> and

<https://www.craftyarnCouncil.com/standards/how-to-read-crochet-pattern> (accessed 23 September 2026).

Written pattern instructions here are newly drafted, not copied from those sources.

Artwork is not a test sample

User-supplied shop images informed themes and colours only. Their printed measurements and short instructions were not treated as validated patterns. These PDFs deliberately do not label marketing renders as actual step-by-step photographs.