CS 78 Computer Networks

Introduction

Andrew T. Campbell

http://www.cs.dartmouth.edu/~cs78/

About the instructor and TA

- Instructor: Andrew T. Campbell
  - campbell@cs.dartmouth.edu
  - Office: Sudikoff 260
  - Office Hours: Wed 1-3 PM
- TA: Nic Lane
  - niclane@cs.dartmouth.edu
  - Office: Sudikoff 249
  - Office Hours: Tues 3-5 PM

Course Information

- Web page
  - http://www.cs.dartmouth.edu/~cs78/
- Lecture
  - Monday, Wednesday, Friday - 1115-1220. Location Room 115 Sudikoff X-hour: Tuesday, 1200-1250. Location 115 Sudikoff
- Note we intend to use x-hour, more in a moment

1-3

Course Book

- James F. Kurose and Keith W. Ross, Computer Networking: A Top-Down Approach Featuring the Internet, 3rd Edition.
- Available from Wheelock Books.

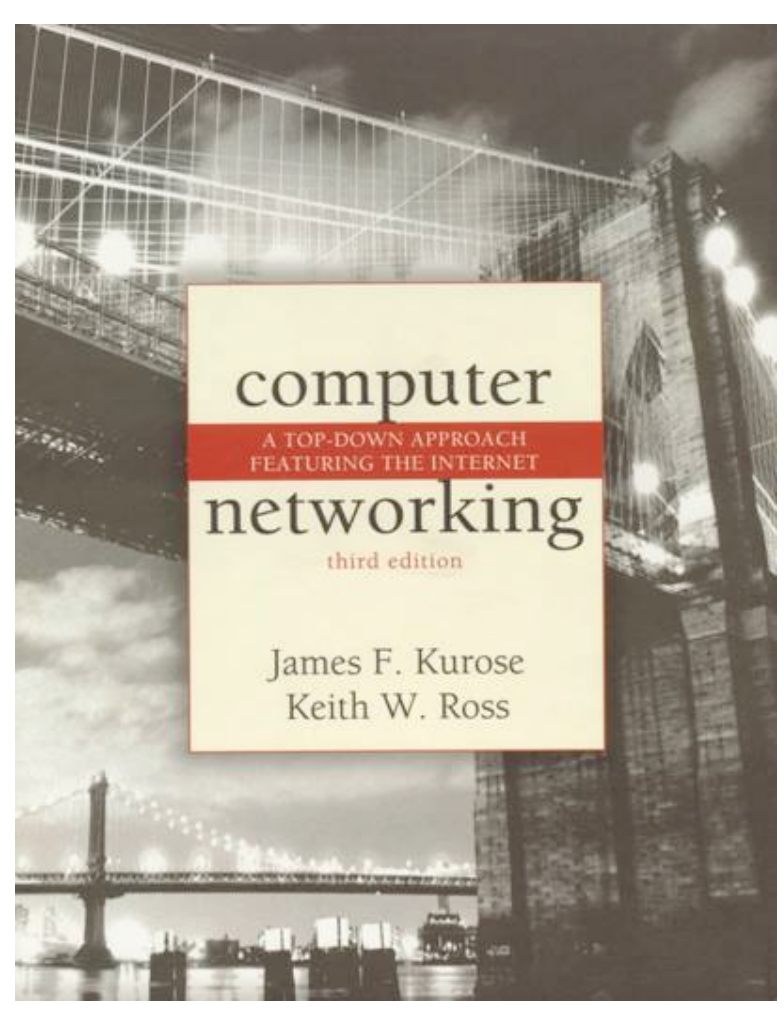

1-4

Topics and Schedule

- Introduction (Week #1)
- Applications (Week #2)
- Transport Layer (Week #3 and #4)
- Network Layer (Week #5 and #6)
- Link Layer (Week #7)
- Wireless and Sensor Networks (Week #8)
- Project Week (Week #9)
- Project Demo (Week #10)

1-5

Grading

- Homework from book (20%). These will be posted on this page as they are issued.
- Ethereal (networking tool) Labs and programming assignments (20%). X-hour will be used as support.
- Group (2 people) projects (20%)
- Two exams. Mid-term (20%). Final exam (20%)

1-6

Group Project

- Proposal (what is the problem addressed)
- Short Design Doc (solving the problem)
- Java Implementation
- Presentation and DEMO (or die!)
- Write up (slides, code, short write up)
- Best project award!
- We will suggest some ideas too.
- Main idea: use what you've learnt and have fun.

1-7

Chapter 1: Introduction

Our goal:

- get "feel" and terminology
- more depth, detail *later* in course
- approach:
  - use Internet as example

Overview:

- what's the Internet
- what's a protocol?
- network edge
- network core
- access net, physical media
- Internet/ISP structure
- performance: loss, delay
- protocol layers, service models
- network modeling

1-8

Chapter 1: roadmap

1.1 What *is* the Internet?
1.2 Network edge
1.3 Network core
1.4 Network access and physical media
1.5 Internet structure and ISPs
1.6 Delay & loss in packet-switched networks
1.7 Protocol layers, service models
1.8 History

1-9

What's the Internet: "nuts and bolts" view

- millions of connected computing devices: *hosts = end systems*
- running *network apps*
- *communication links*
  - fiber, copper, radio, satellite
  - transmission rate = ***bandwidth***
- *routers:* forward packets (chunks of data)

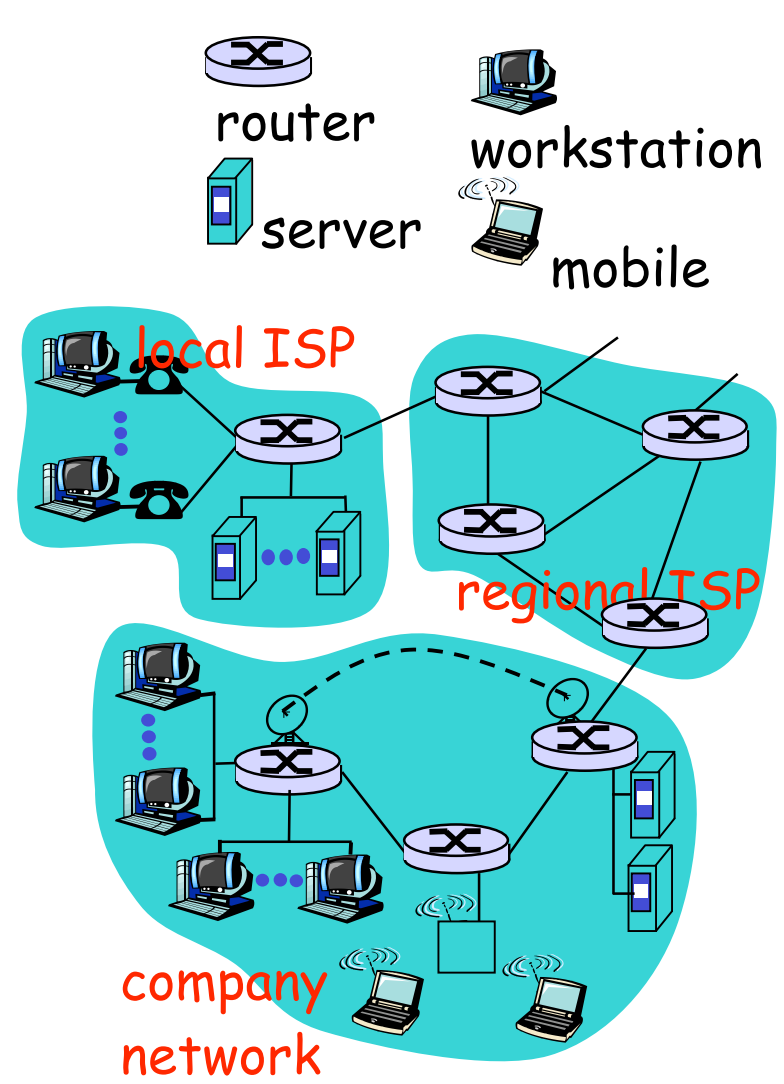

1-10

“Cool” internet appliances

IP picture frame
http://www.ceiva.com/

Web-enabled toaster +
weather forecaster



World’s smallest web server
http://www-ccs.cs.umass.edu/~shri/iPic.html

Internet phones

1-11

What’s the Internet: “nuts and bolts” view

- *protocols* control sending, receiving of msgs
  - e.g., TCP, IP, HTTP, FTP, PPP
- *Internet:* “network of networks”
  - loosely hierarchical
  - public Internet versus private intranet
- Internet standards
  - RFC: Request for comments
  - IETF: Internet Engineering Task Force

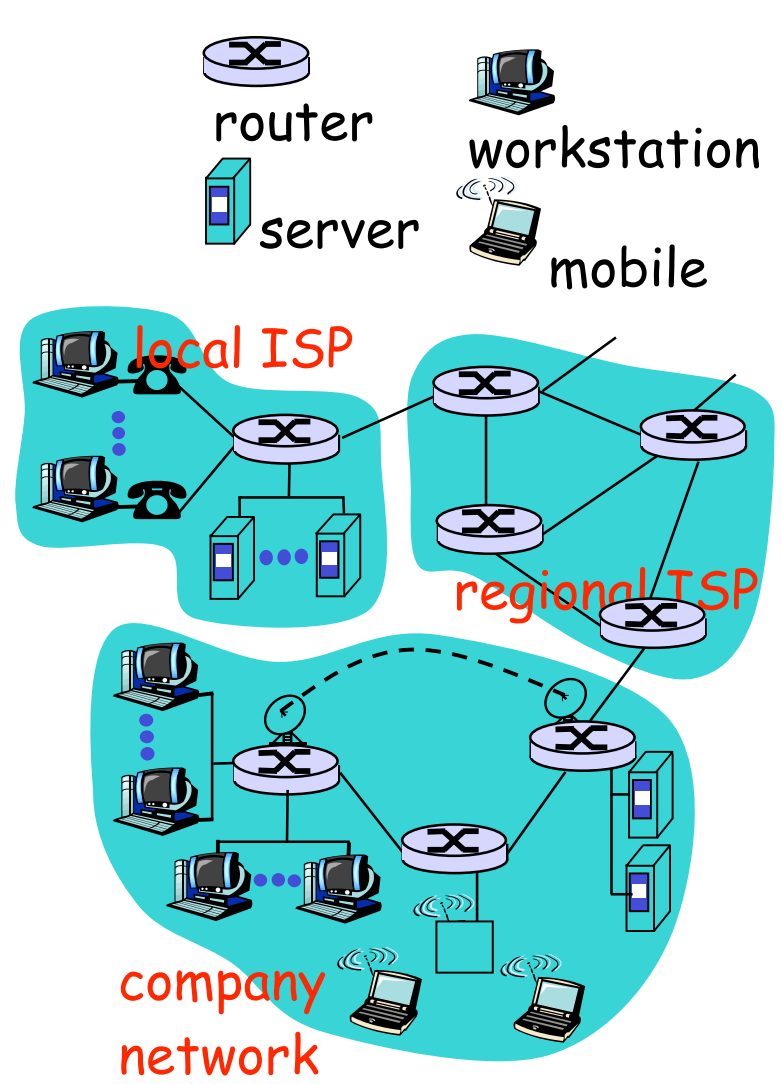

1-12

What's the Internet: a service view

- communication *infrastructure* enables distributed applications:
  - Web, email, games, e-commerce, file sharing
- communication services provided to apps:
  - Connectionless unreliable
  - connection-oriented reliable

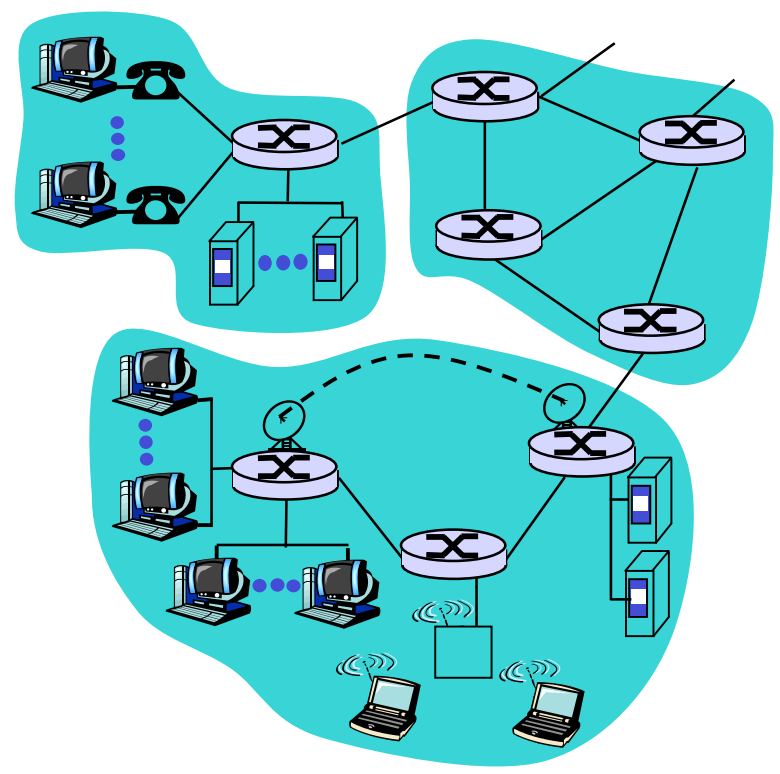

1-13

What's a protocol?

human protocols:

- "what's the time?"
- "I have a question"
- introductions

… specific msgs sent

… specific actions taken when msgs received, or other events

network protocols:

- machines rather than humans
- all communication activity in Internet governed by protocols

protocols define format, order of msgs sent and received among network entities, and actions taken on msg transmission, receipt

1-14

What's a protocol?

a human protocol and a computer network protocol:

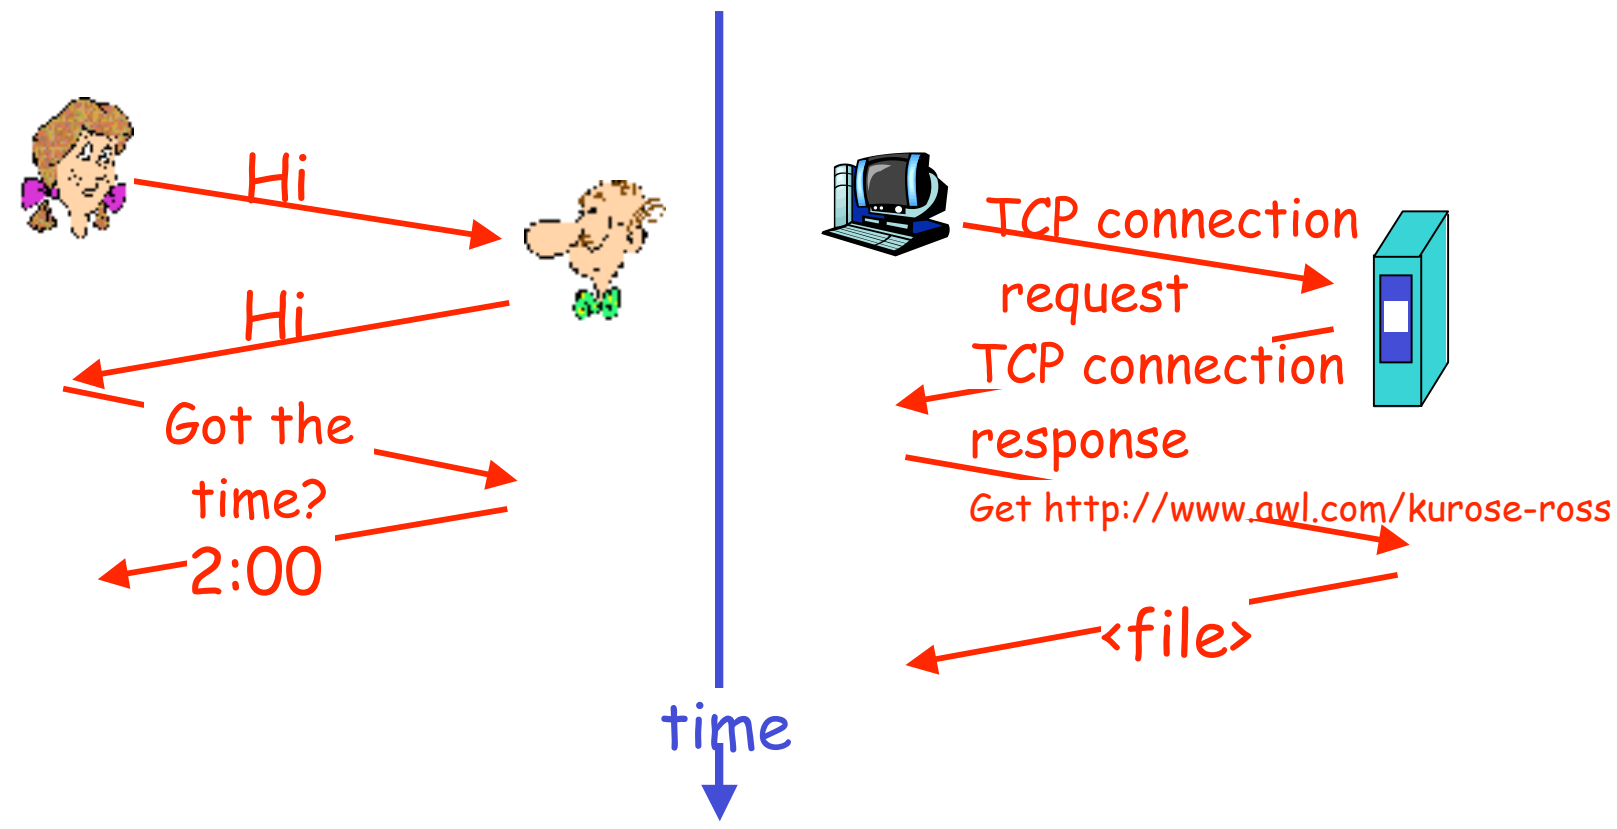

Q: Other human protocols?

Chapter 1: roadmap

1.1 What *is* the Internet?
1.2 Network edge
1.3 Network core
1.4 Network access and physical media
1.5 Internet structure and ISPs
1.6 Delay & loss in packet-switched networks
1.7 Protocol layers, service models
1.8 History

A closer look at network structure:

- network edge: applications and hosts
- network core:
  - routers
  - network of networks
- access networks, physical media: communication links

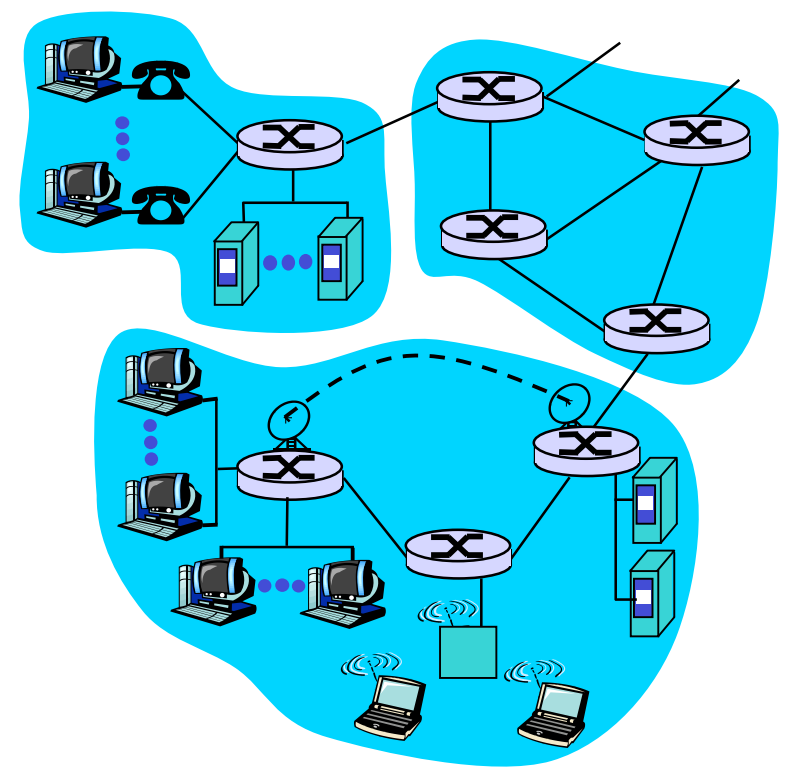

1-17

The network edge:

- end systems (hosts):
  - run application programs
  - e.g. Web, email
  - at "edge of network"
- client/server model
  - client host requests, receives service from always-on server
  - e.g. Web browser/server; email client/server
- peer-peer model:
  - minimal (or no) use of dedicated servers

  e.g. Skype, BitTorrent, KaZaA

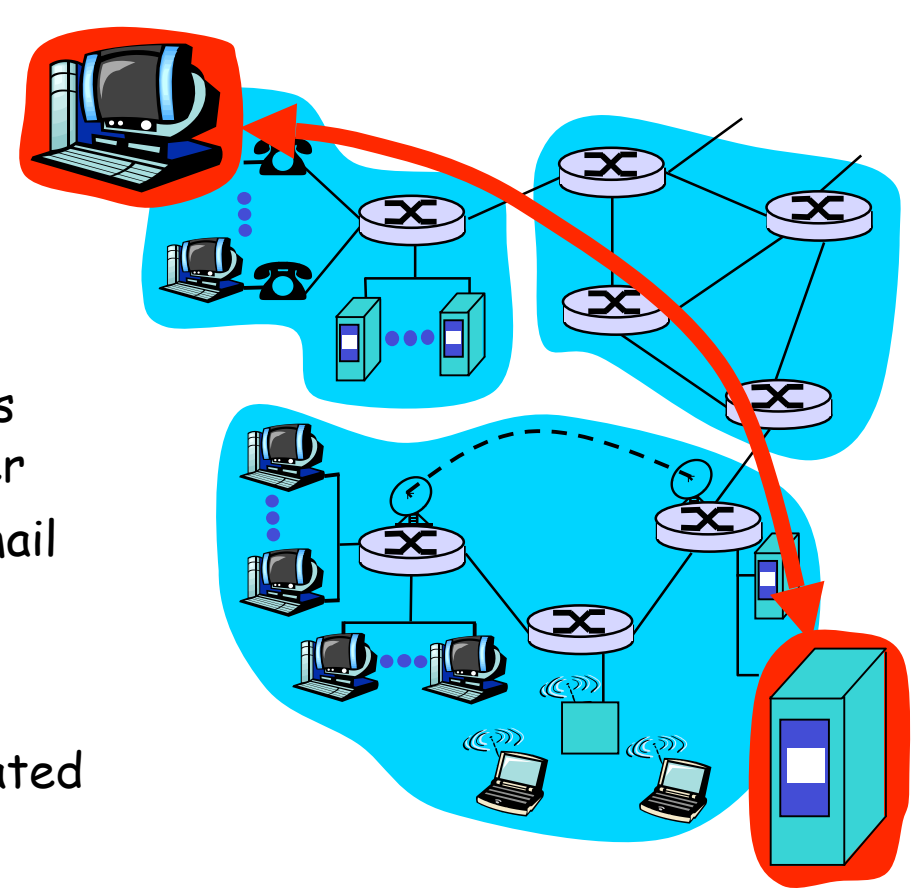

1-18

Network edge: connection-oriented service

Goal: data transfer between end systems

- *handshaking:* setup (prepare for) data transfer ahead of time
  - Hello, hello back human protocol
  - *set up "state"* in two communicating hosts
- TCP - Transmission Control Protocol
  - Internet's connection-oriented service

TCP service [RFC 793]

- *reliable, in-order* byte-stream data transfer
  - loss: acknowledgements and retransmissions
- *flow control:*
  - sender won't overwhelm receiver
- *congestion control:*
  - senders "slow down sending rate" when network congested

1-19

Network edge: connectionless service

Goal: data transfer between end systems

- same as before!
- UDP - User Datagram Protocol [RFC 768]:
  - connectionless
  - unreliable data transfer
  - no flow control
  - no congestion control

App's using TCP:

- HTTP (Web), FTP (file transfer), Telnet (remote login), SMTP (email)

App's using UDP:

- streaming media, teleconferencing, DNS, Internet telephony

1-20

Chapter 1: roadmap

The Network Core

- mesh of interconnected routers
- *the* fundamental question: how is data transferred through net?
  - circuit switching: dedicated circuit per call: telephone net
  - packet-switching: data sent thru net in discrete "chunks"

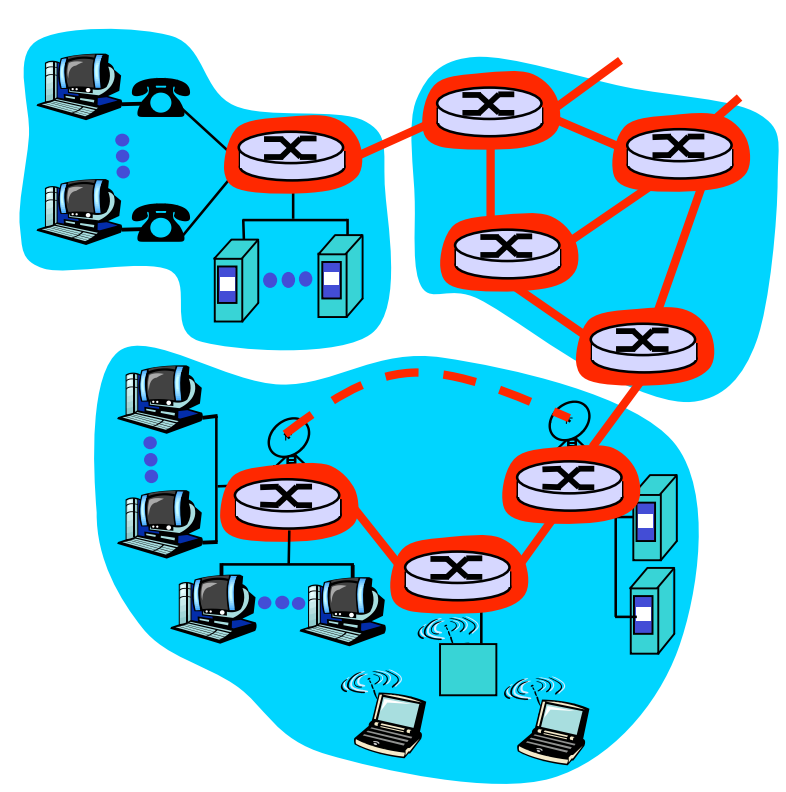

Network Core: Circuit Switching

End-end resources reserved for "call"

- link bandwidth, switch capacity
- dedicated resources: no sharing
- circuit-like (guaranteed) performance
- call setup required

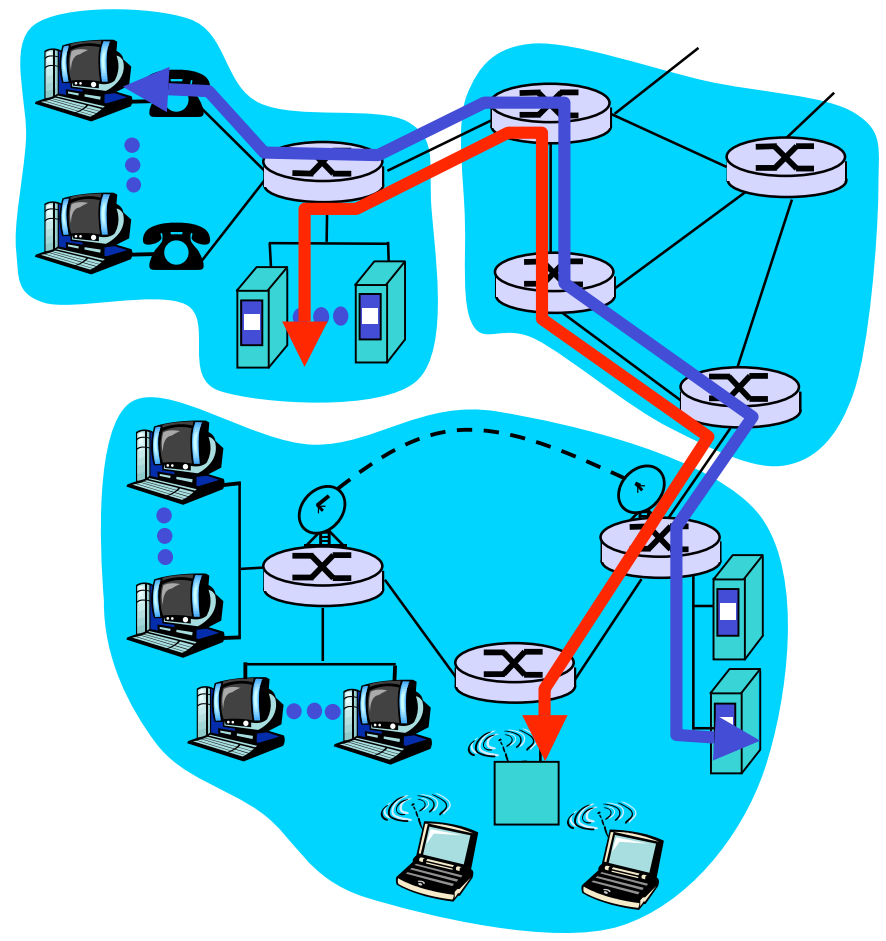

1-23

Network Core: Circuit Switching

network resources (e.g., bandwidth) divided into "pieces"

- pieces allocated to calls
- resource piece *idle* if not used by owning call *(no sharing)*

- dividing link bandwidth into "pieces"
  - frequency division
  - time division

1-24

Circuit Switching: FDM and TDM

Example:

4 users

FDM

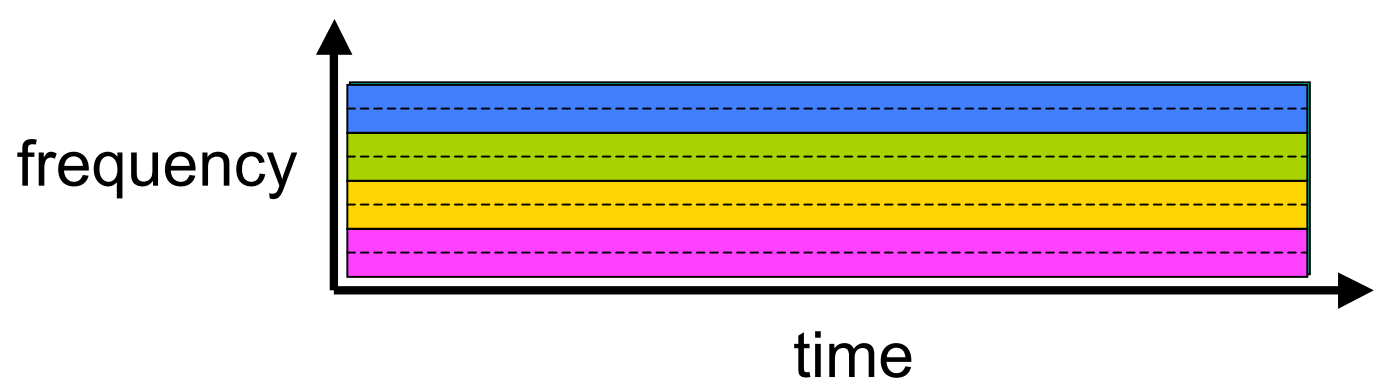

TDM

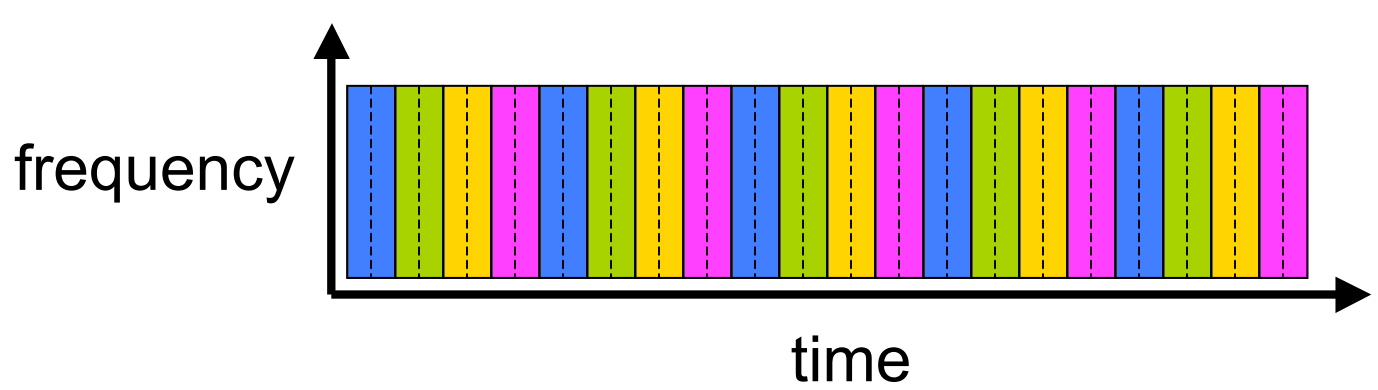

1-25

Numerical example

- How long does it take to send a file of 640,000 bits from host A to host B over a circuit-switched network?
  - All links are 1.536 Mbps
  - Each link uses TDM with 24 slots/sec
  - 500 msec to establish end-to-end circuit

Let's work it out!

1-26

Network Core: Packet Switching

each end-end data stream divided into *packets*

- user A, B packets *share* network resources
- each packet uses full link bandwidth
- resources used *as needed*

Bandwidth division into "pieces"
Dedicated allocation
Resource reservation

resource contention:

- aggregate resource demand can exceed amount available
- congestion: packets queue, wait for link use
- store and forward: packets move one hop at a time
  - Node receives complete packet before forwarding

1-27

Packet Switching: Statistical Multiplexing

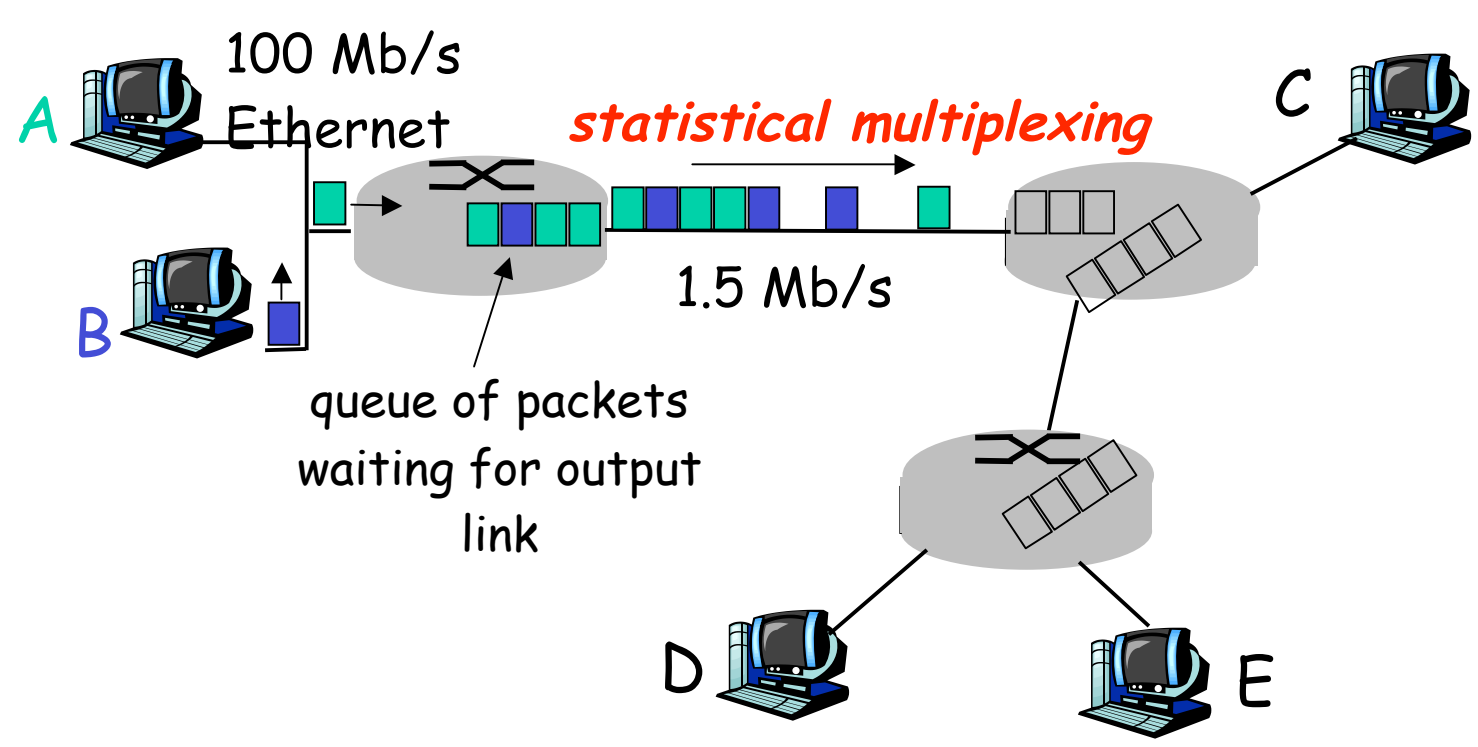

Sequence of A & B packets does not have fixed pattern, shared on demand ➡ ***statistical multiplexing***.

TDM: each host gets same slot in revolving TDM frame.

1-28

Packet-switching: store-and-forward



- Takes L/R seconds to transmit (push out) packet of L bits on to link or R bps
- Entire packet must arrive at router before it can be transmitted on next link: *store and forward*
- delay = 3L/R (assuming zero propagation delay)

more on delay shortly …

Example:
- L = 7.5 Mbits
- R = 1.5 Mbps
- delay = 15 sec

1-29

Packet switching versus circuit switching

Packet switching allows more users to use network!

- 1 Mb/s link
- each user:
  - 100 kb/s when "active"
  - active 10% of time
- circuit-switching:
  - 10 users
- packet switching:
  - with 35 users, probability > 10 active less than .0004

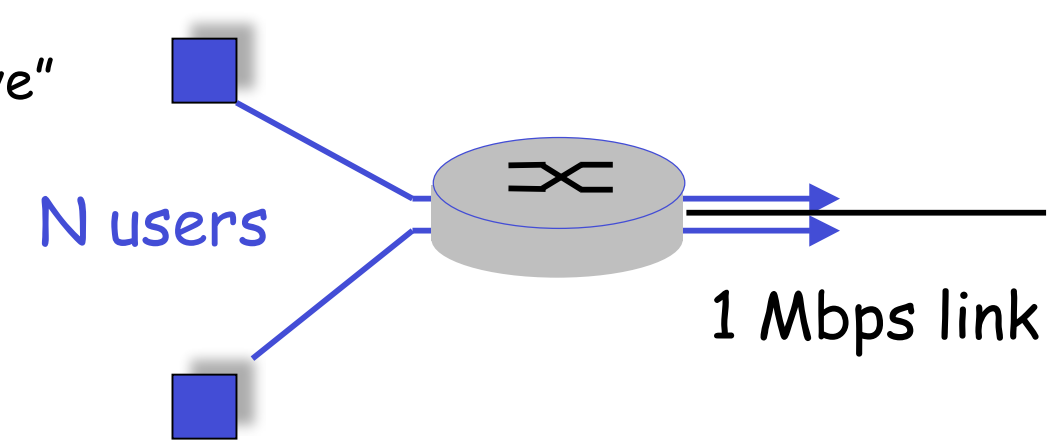

Q: how did we get value 0.0004?

1-30

Packet switching versus circuit switching

Is packet switching a "slam dunk winner?"

- Great for bursty data
  - resource sharing
  - simpler, no call setup
- Excessive congestion: packet delay and loss
  - protocols needed for reliable data transfer, congestion control
- Q: How to provide circuit-like behavior?
  - bandwidth guarantees needed for audio/video apps
  - still an unsolved problem (chapter 7)

Q: human analogies of reserved resources (circuit switching) versus on-demand allocation (packet-switching)?

Chapter 1: roadmap

1.1 What *is* the Internet?
1.2 Network edge
1.3 Network core
1.4 Network access and physical media
1.5 Internet structure and ISPs
1.6 Delay & loss in packet-switched networks
1.7 Protocol layers, service models
1.8 History

Access networks and physical media

Q: How to connect end systems to edge router?

- residential access nets
- institutional access networks (school, company)
- mobile access networks

Keep in mind:

- bandwidth (bits per second) of access network?
- shared or dedicated?

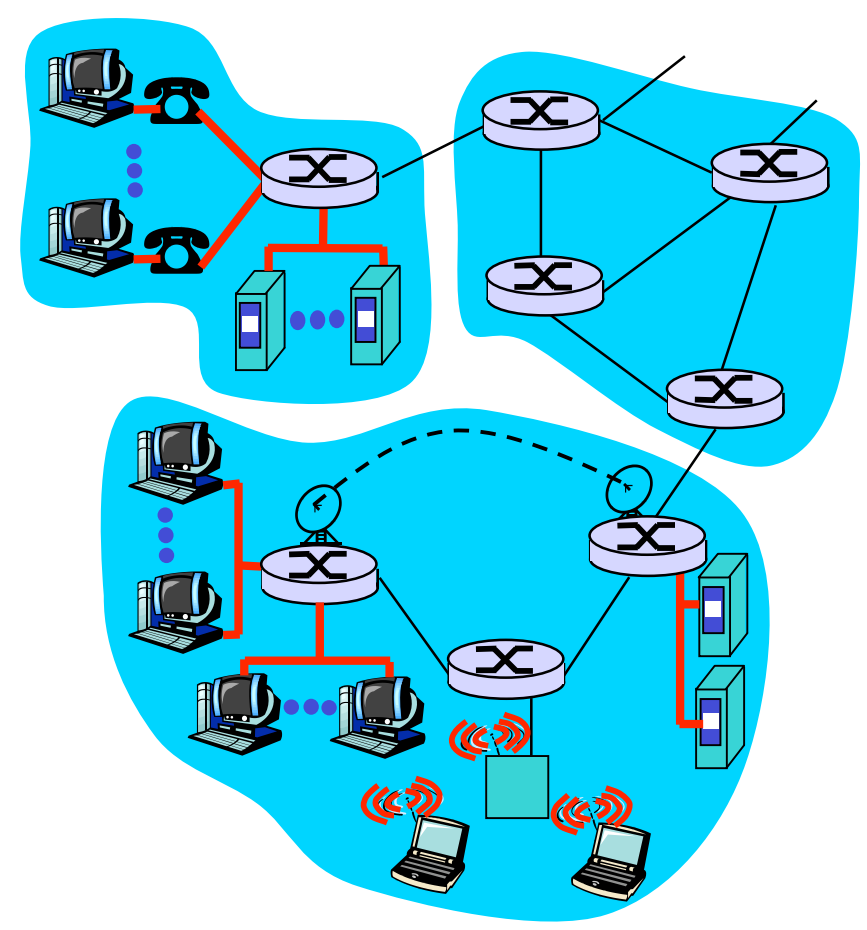

1-33

Residential access: point to point access

- Dialup via modem
  - up to 56Kbps direct access to router (often less)
  - Can't surf and phone at same time: can't be "always on"



- ADSL: asymmetric digital subscriber line
  - up to 1 Mbps upstream (today typically < 256 kbps)
  - up to 8 Mbps downstream (today typically < 1 Mbps)
  - FDM: 50 kHz - 1 MHz for downstream

    4 kHz - 50 kHz for upstream

    0 kHz - 4 kHz for ordinary telephone

1-34

Residential access: cable modems

- HFC: hybrid fiber coax
  - asymmetric: up to 30Mbps downstream, 2 Mbps upstream
- network of cable and fiber attaches homes to ISP router
  - homes share access to router
- deployment: available via cable TV companies

1-35

Residential access: cable modems

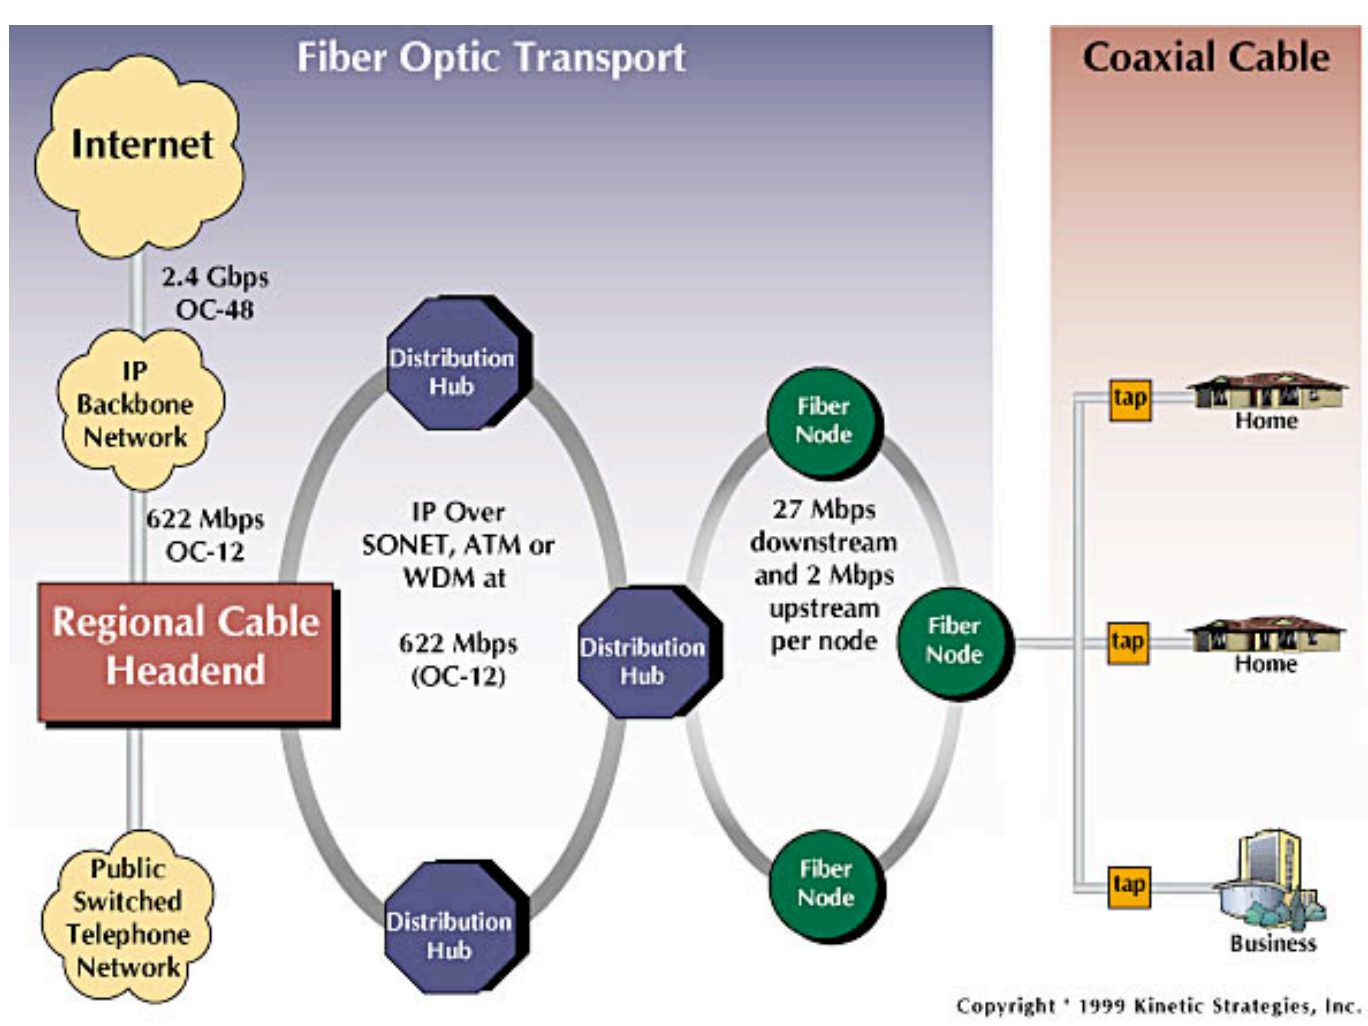

Diagram: http://www.cabledatacomnews.com/cmic/diagram.html

1-36

Cable Network Architecture: Overview

Typically 500 to 5,000 homes

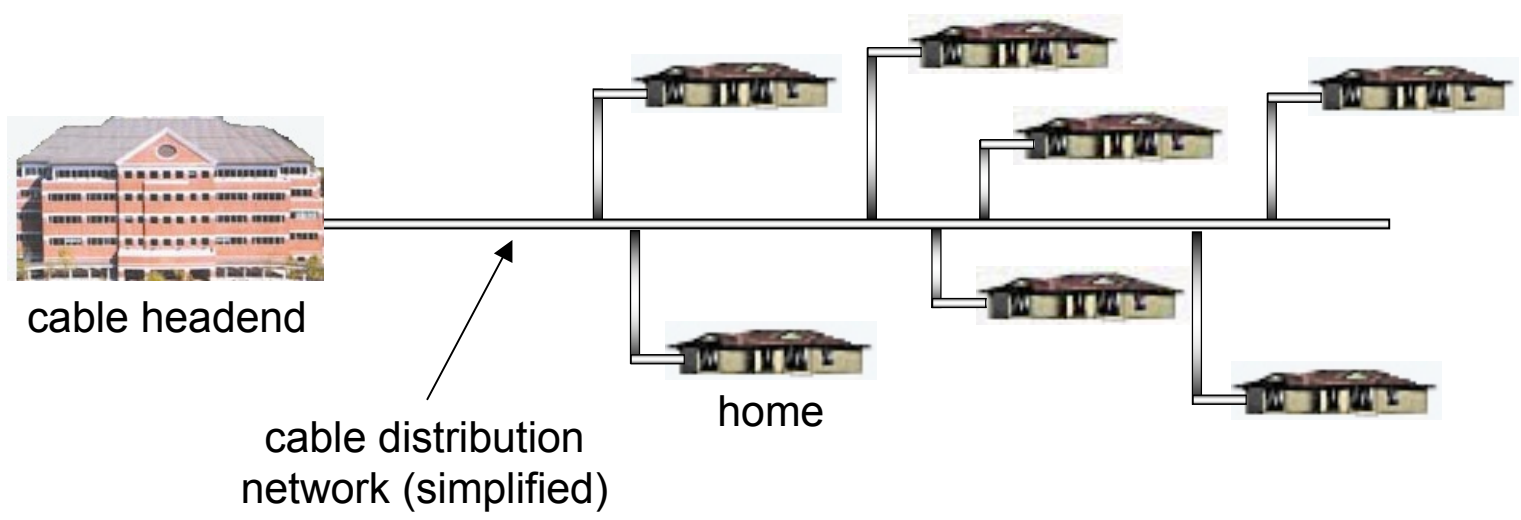

1-37

Cable Network Architecture: Overview

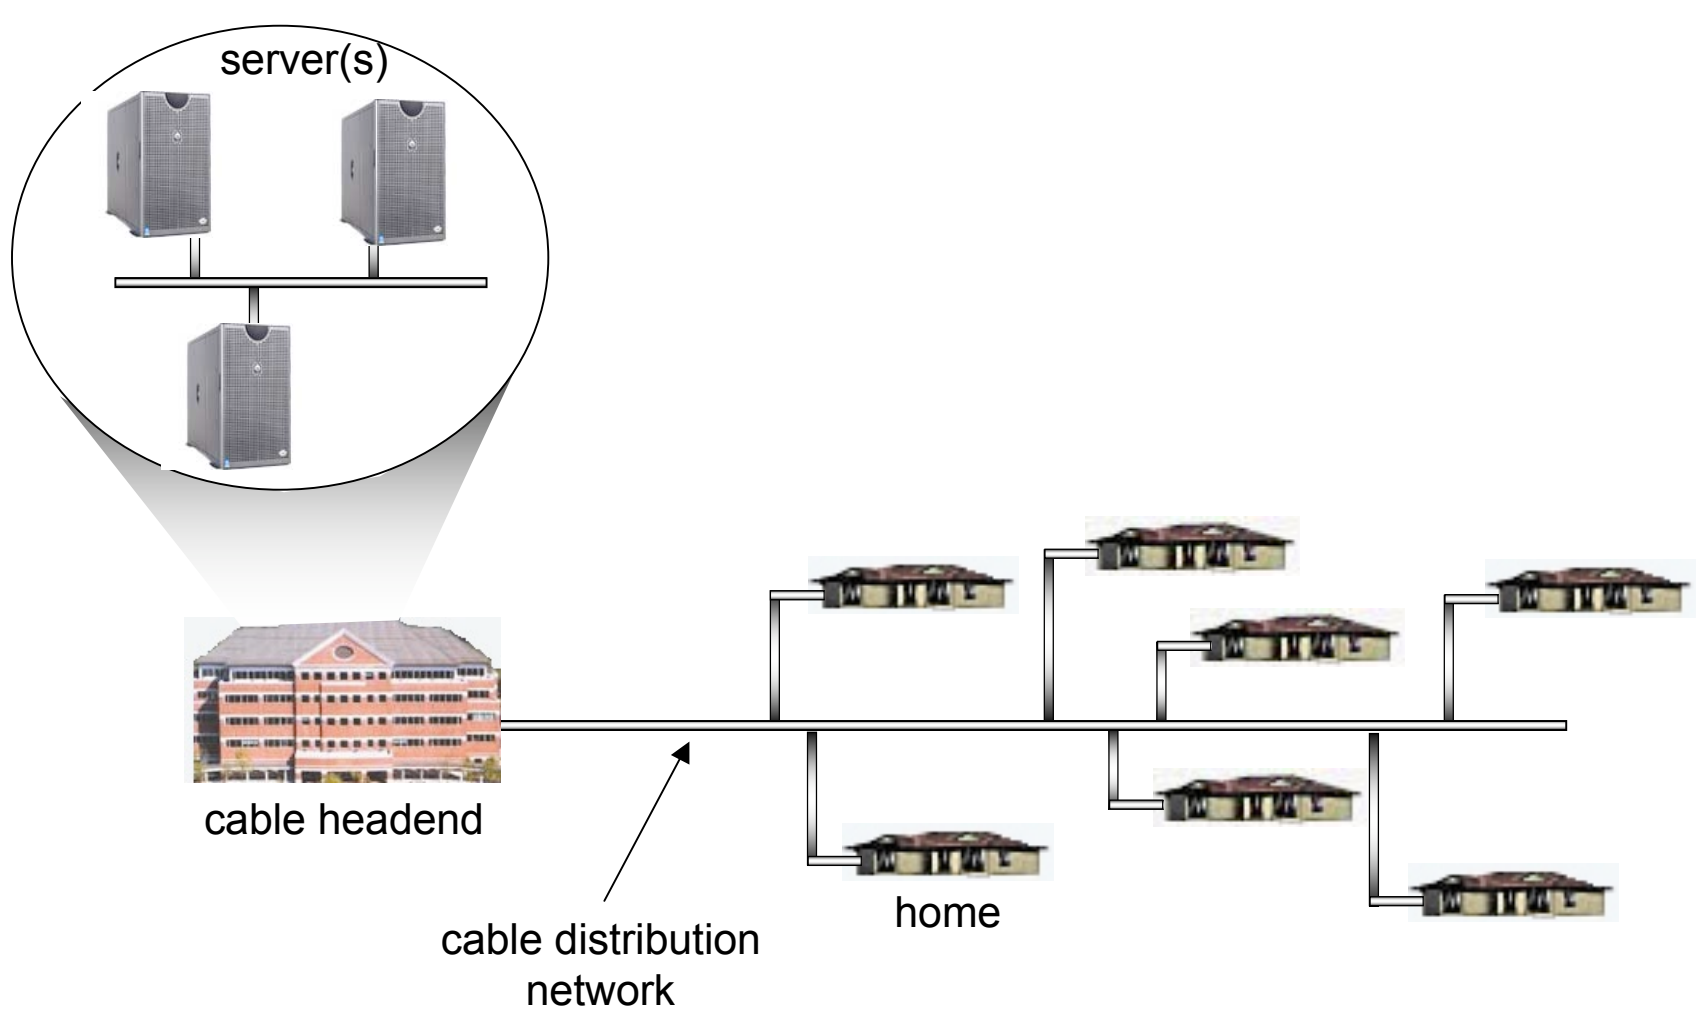

1-38

Cable Network Architecture: Overview

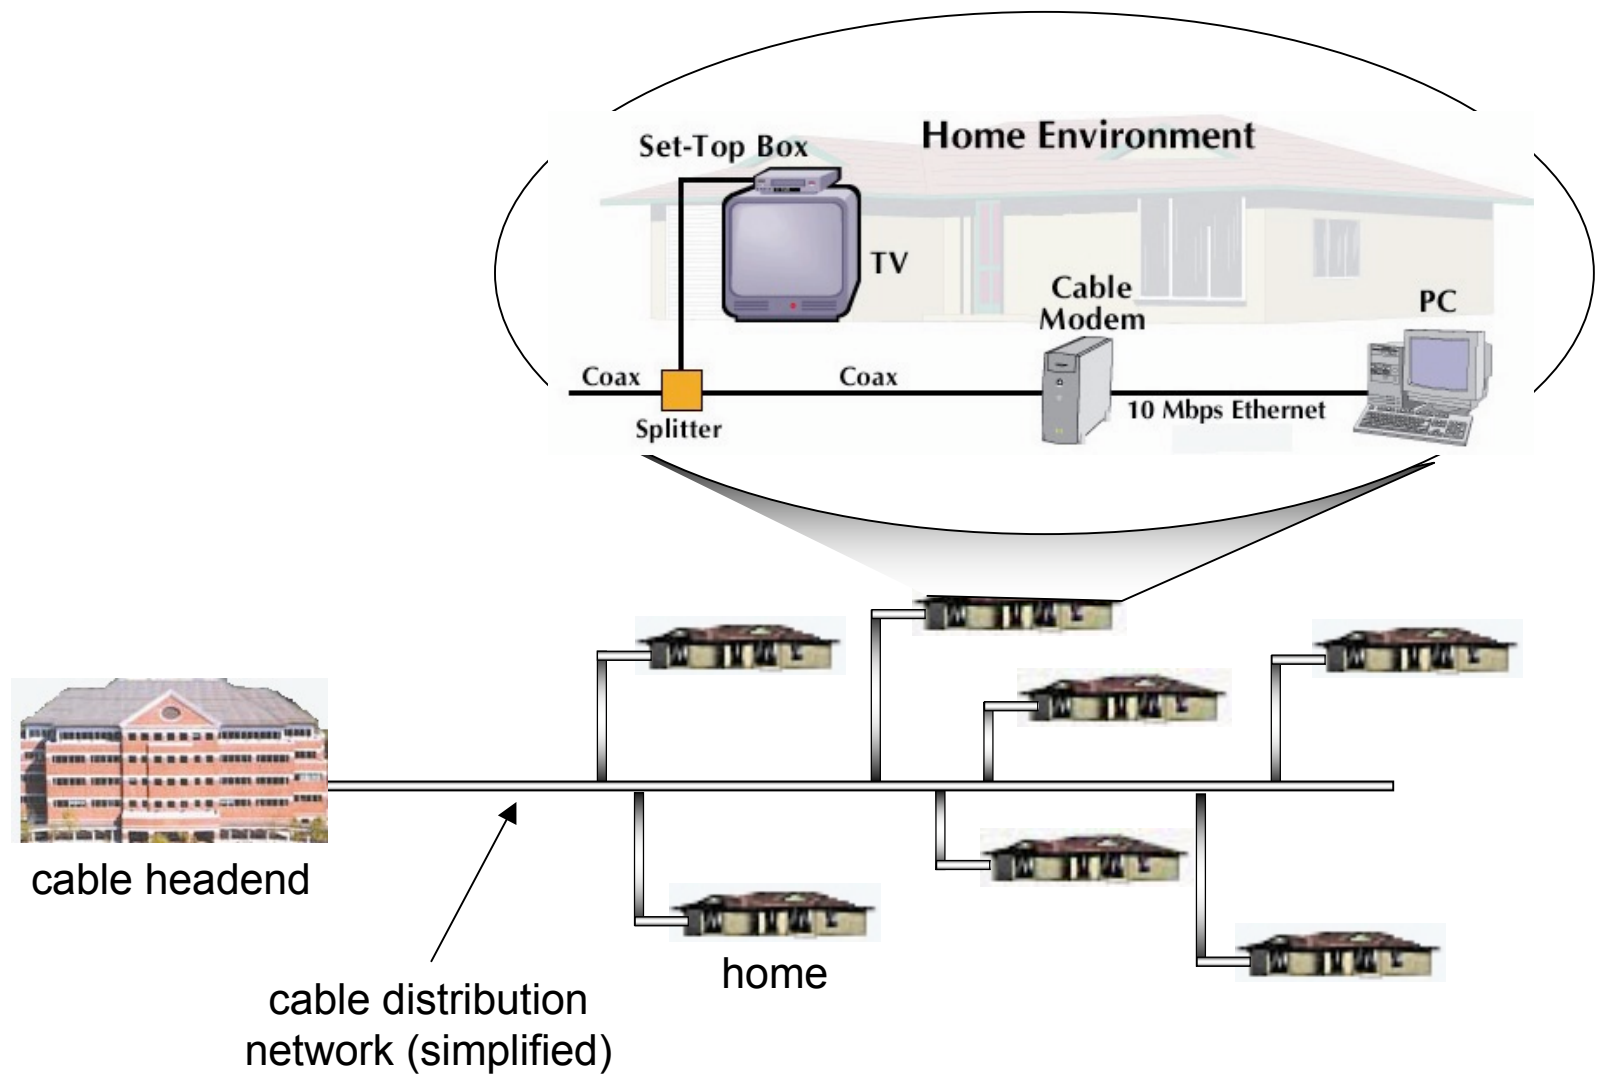

1-39

Cable Network Architecture: Overview

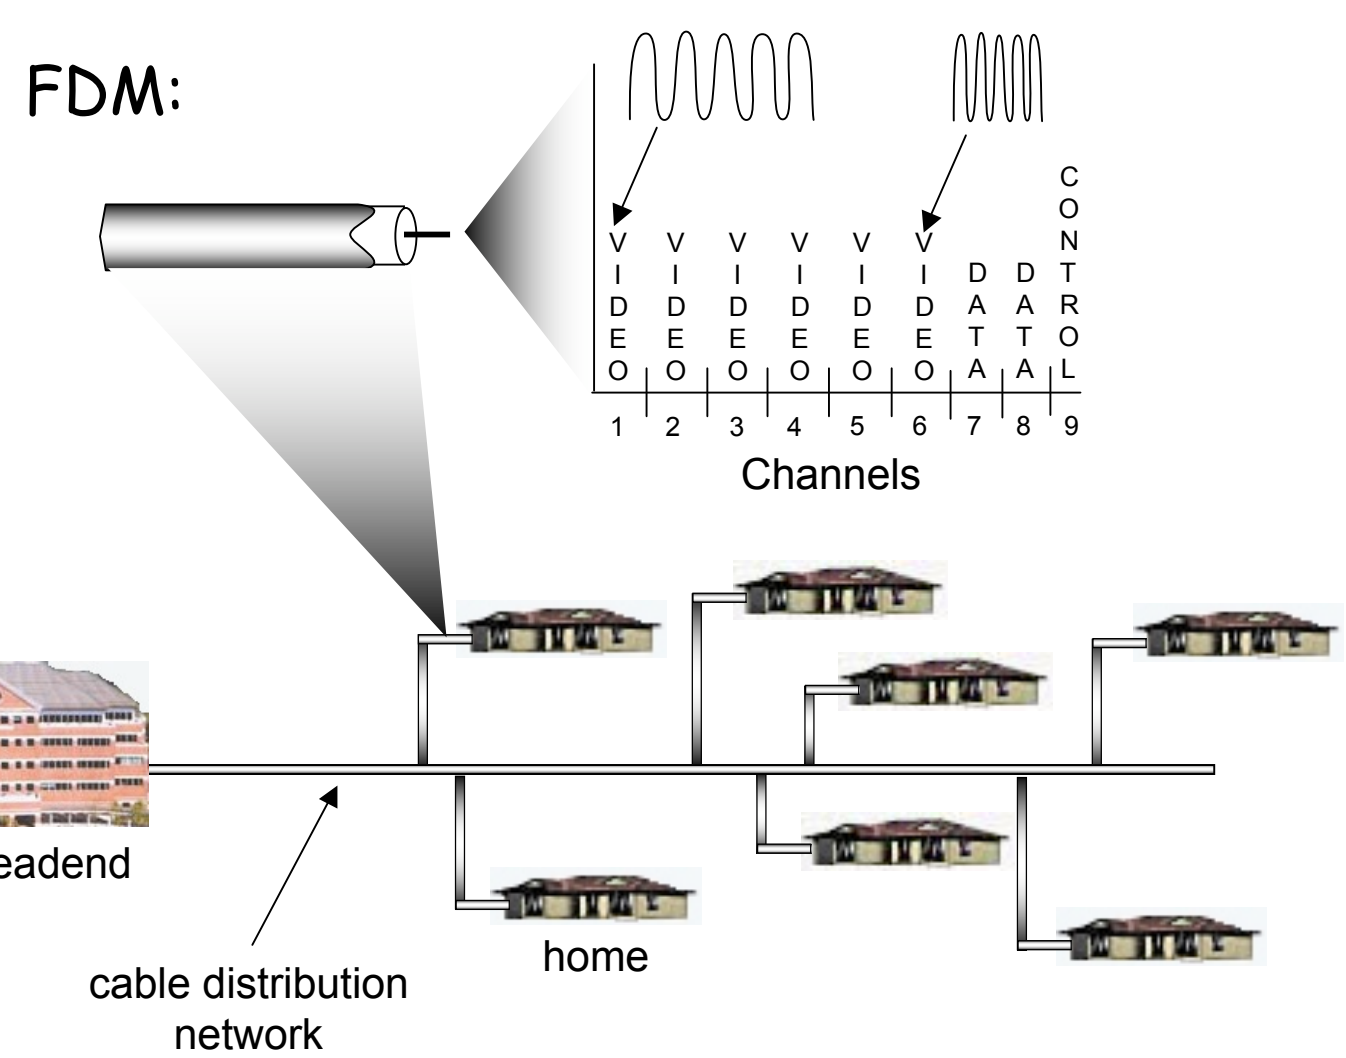

1-40

Company access: local area networks

- company/univ local area network (LAN) connects end system to edge router
- Ethernet:
  - shared or dedicated link connects end system and router
  - 10 Mbs, 100Mbps, Gigabit Ethernet
- LANs: chapter 5



1-41

Wireless access networks

- shared *wireless* access network connects end system to router
  - via base station aka "access point"
- wireless LANs:
  - 802.11b/g (WiFi): 11 or 54 Mbps
- wider-area wireless access
  - provided by telco operator
  - 3G ~ 384 kbps
    - Will it happen??
  - GPRS in Europe/US

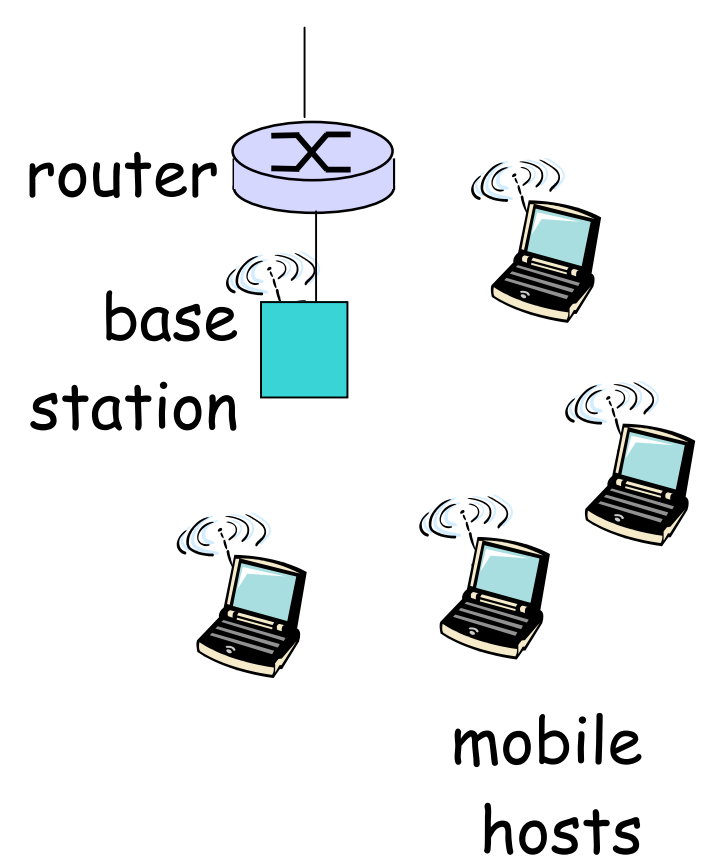

1-42

Home networks

Typical home network components:
- ADSL or cable modem
- router/firewall/NAT
- Ethernet
- wireless access point

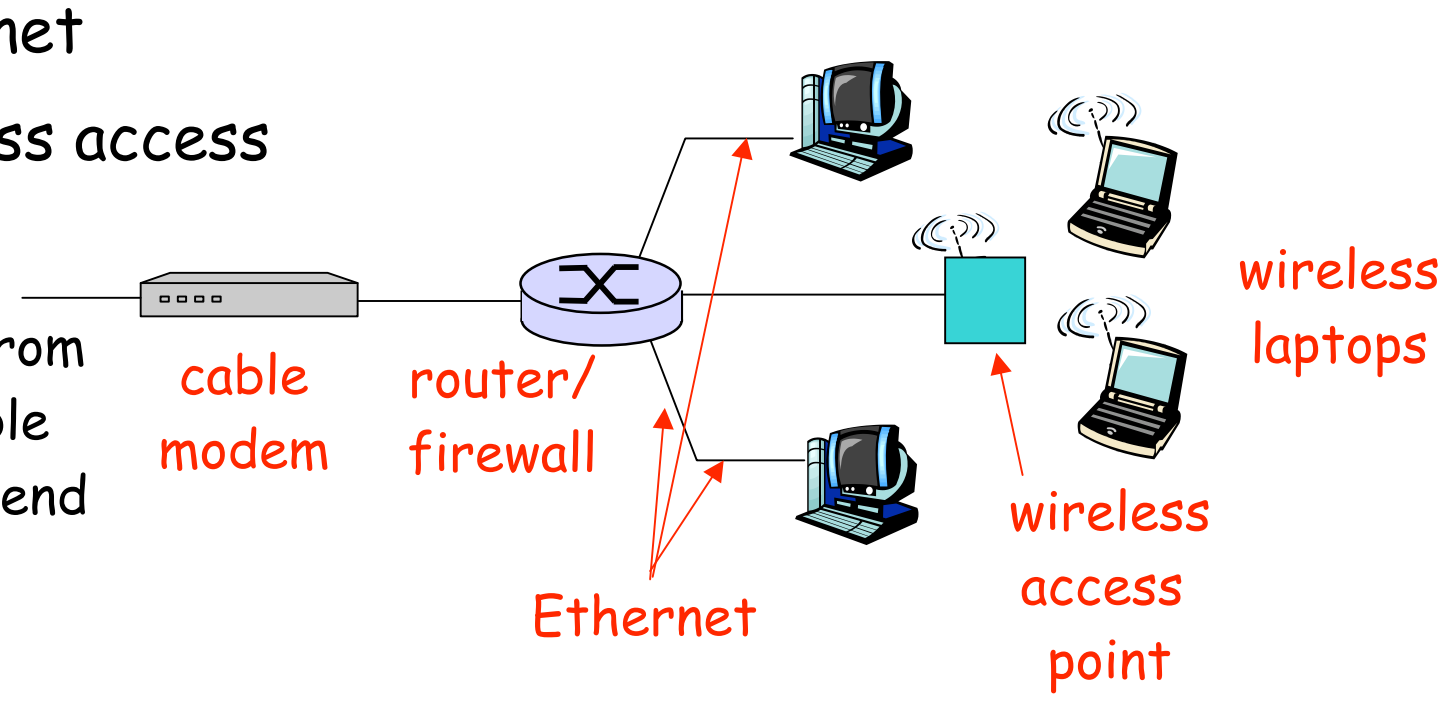

1-43

Physical Media

- Bit: propagates between transmitter/rcvr pairs
- physical link: what lies between transmitter & receiver
- guided media:
  - signals propagate in solid media: copper, fiber, coax
- unguided media:
  - signals propagate freely, e.g., radio

Twisted Pair (TP)

- two insulated copper wires
  - Category 3: traditional phone wires, 10 Mbps Ethernet
  - Category 5: 100Mbps Ethernet

1-44

Physical Media: coax, fiber

Coaxial cable:

- two concentric copper conductors
- bidirectional
- baseband:
  - single channel on cable
  - legacy Ethernet
- broadband:
  - multiple channels on cable
  - 

Fiber optic cable:

- glass fiber carrying light pulses, each pulse a bit
- high-speed operation:
  - high-speed point-to-point transmission (e.g., 10's-100's Gps)
- low error rate: repeaters sp
  im
  ele ise

1-45

Physical media: radio

- signal carried in electromagnetic spectrum
- no physical "wire"
- bidirectional
- propagation environment effects:
  - reflection
  - obstruction by objects
  - interference

Radio link types:

- terrestrial microwave
  - e.g. up to 45 Mbps channels
- LAN (e.g., Wifi)
  - 11Mbps, 54 Mbps
- wide-area (e.g., cellular)
  - e.g. 3G: hundreds of kbps
- satellite
  - Kbps to 45Mbps channel (or multiple smaller channels)
  - 270 msec end-end delay
  - geosynchronous versus low altitude

1-46

Chapter 1: roadmap

1-47

Internet structure: network of networks

- roughly hierarchical
- at center: "tier-1" ISPs (e.g., MCI, Sprint, AT&T, Cable and Wireless), national/international coverage
  - treat each other as equals

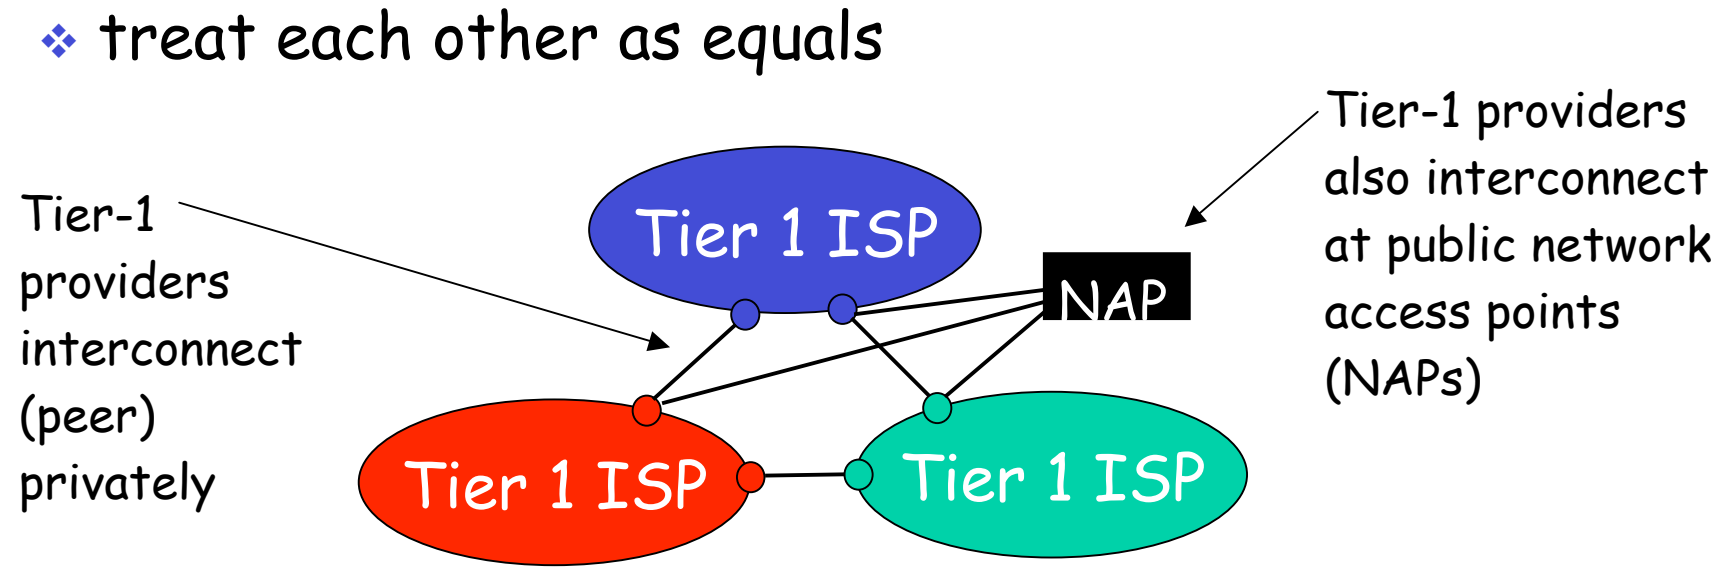

1-48

Tier-1 ISP: e.g., Sprint

Sprint US backbone network

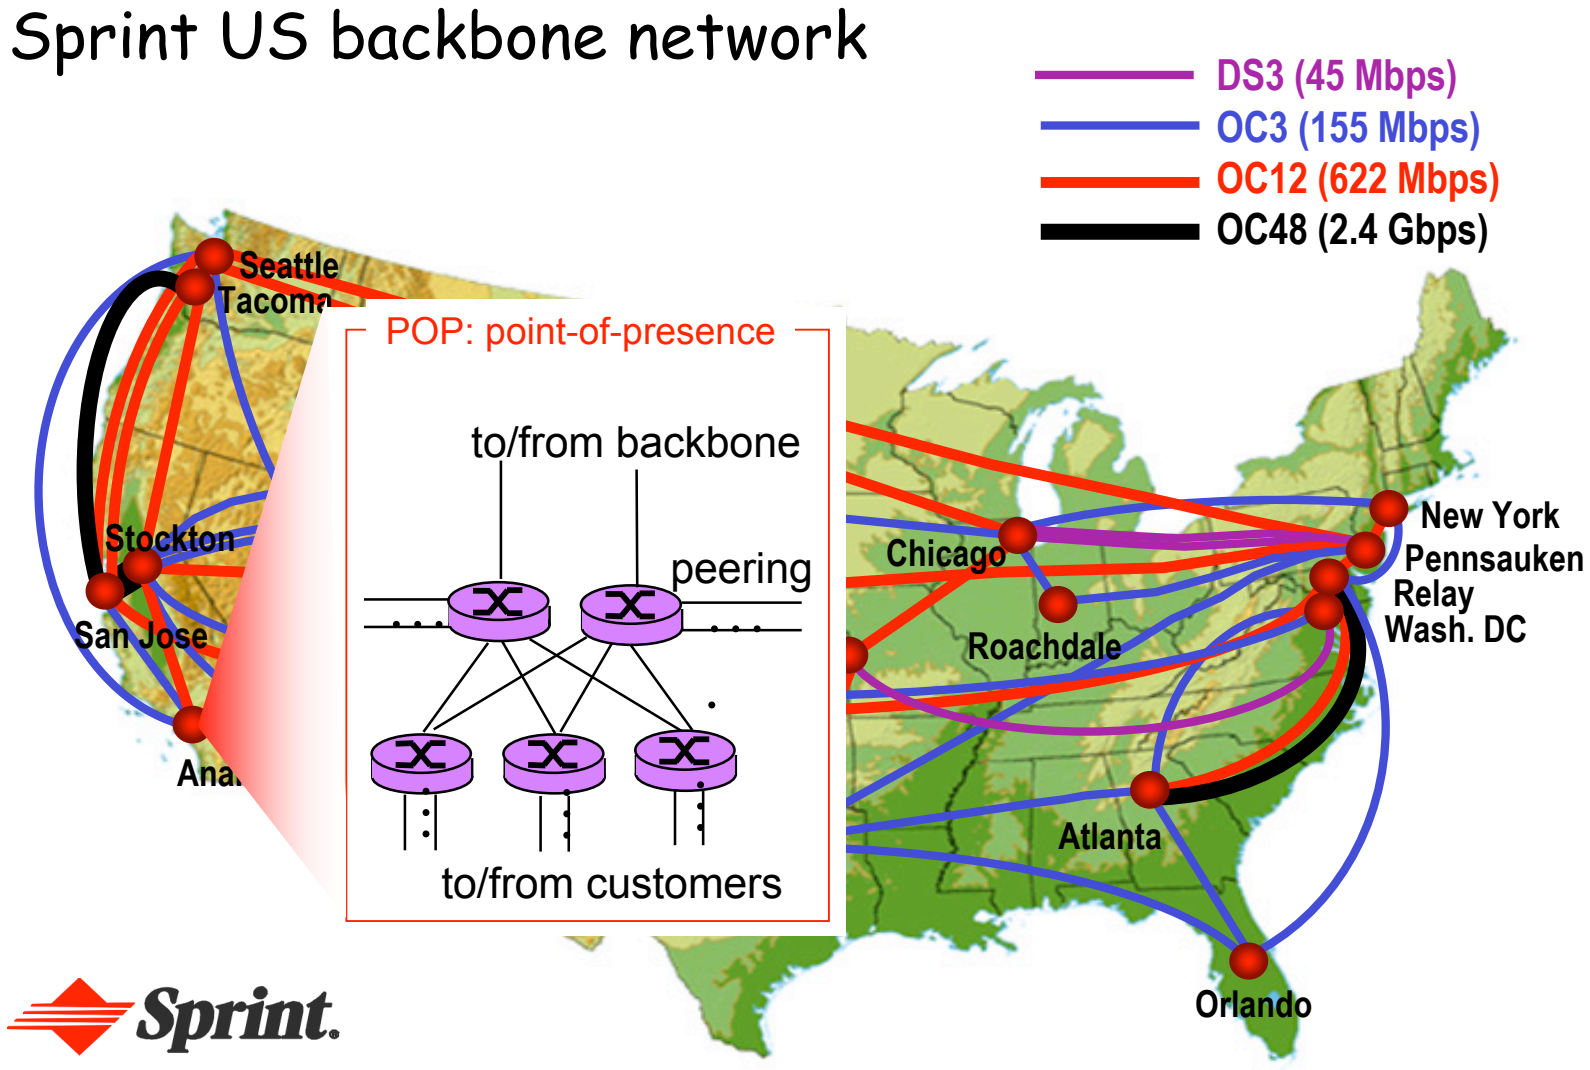

Sprint.

Internet structure: network of networks

- "Tier-2" ISPs: smaller (often regional) ISPs
  - Connect to one or more tier-1 ISPs, possibly other tier-2 ISPs

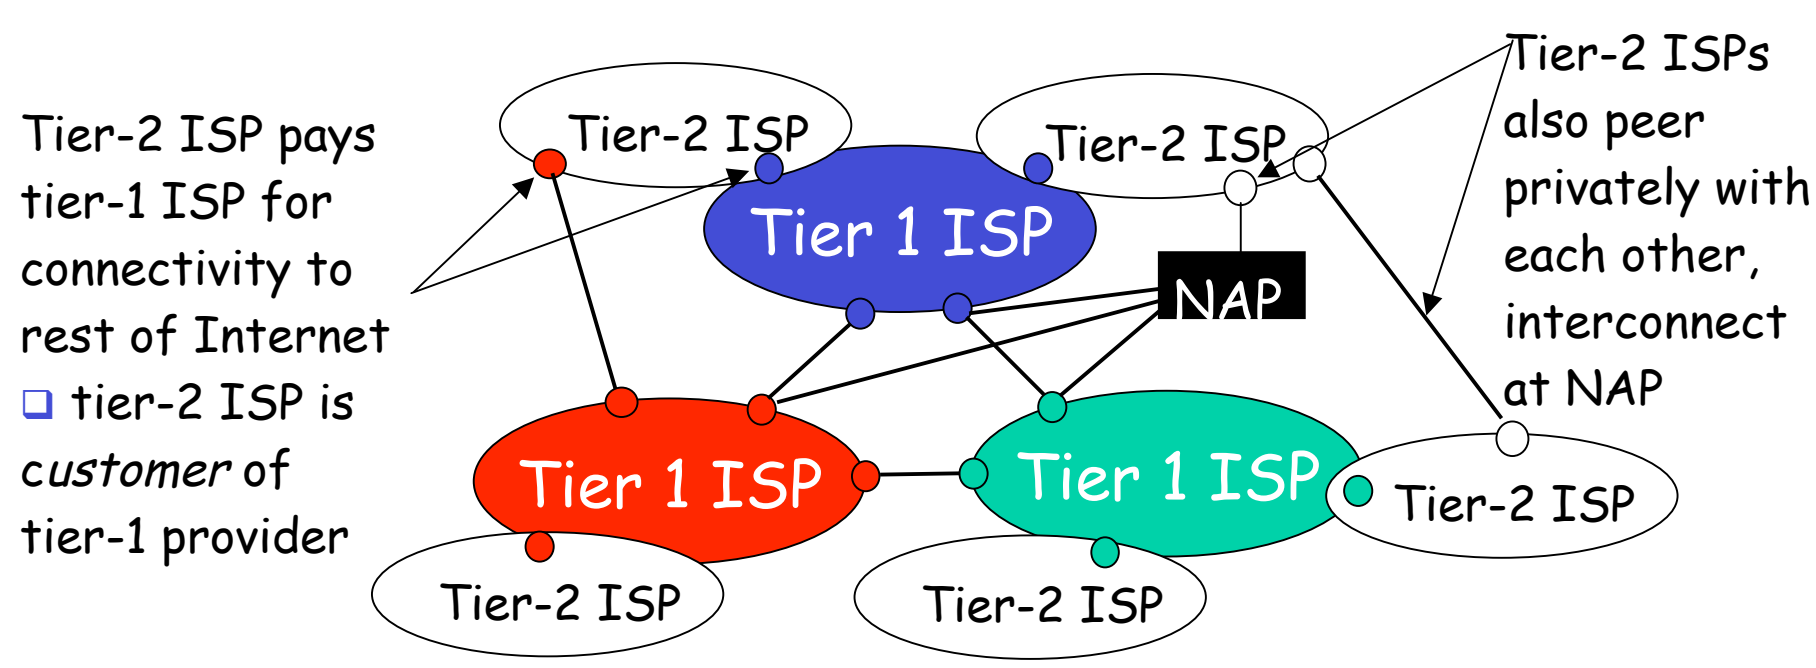

Internet structure: network of networks

- "Tier-3" ISPs and local ISPs
  - last hop ("access") network (closest to end systems)

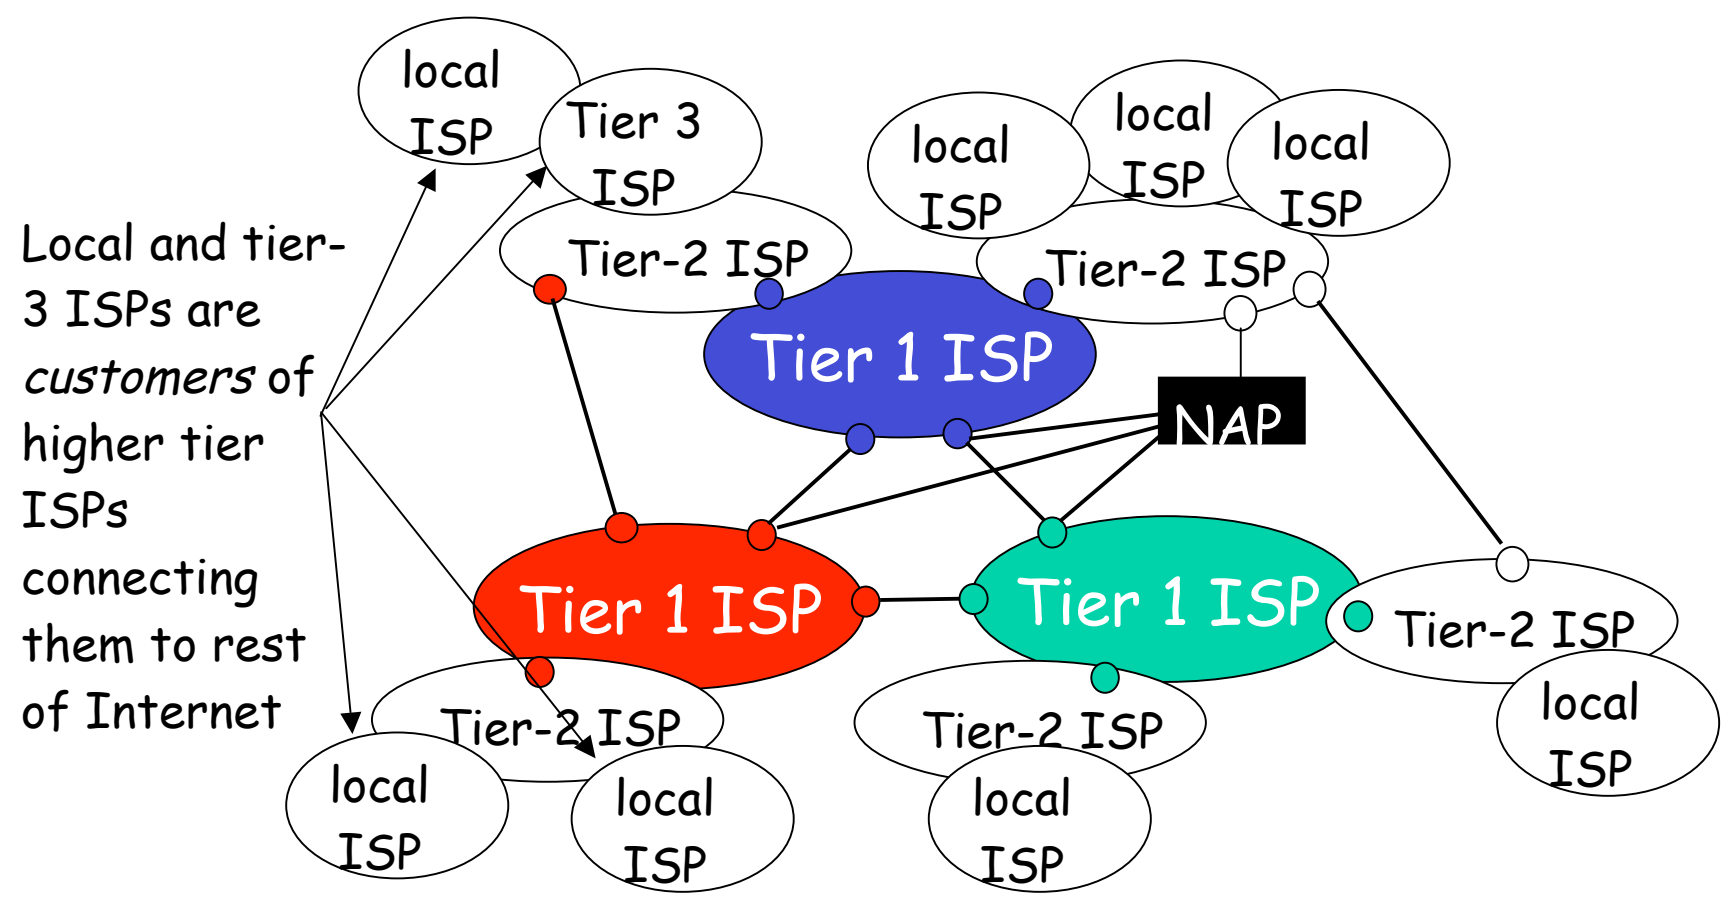

1-51

Internet structure: network of networks

- a packet passes through many networks!

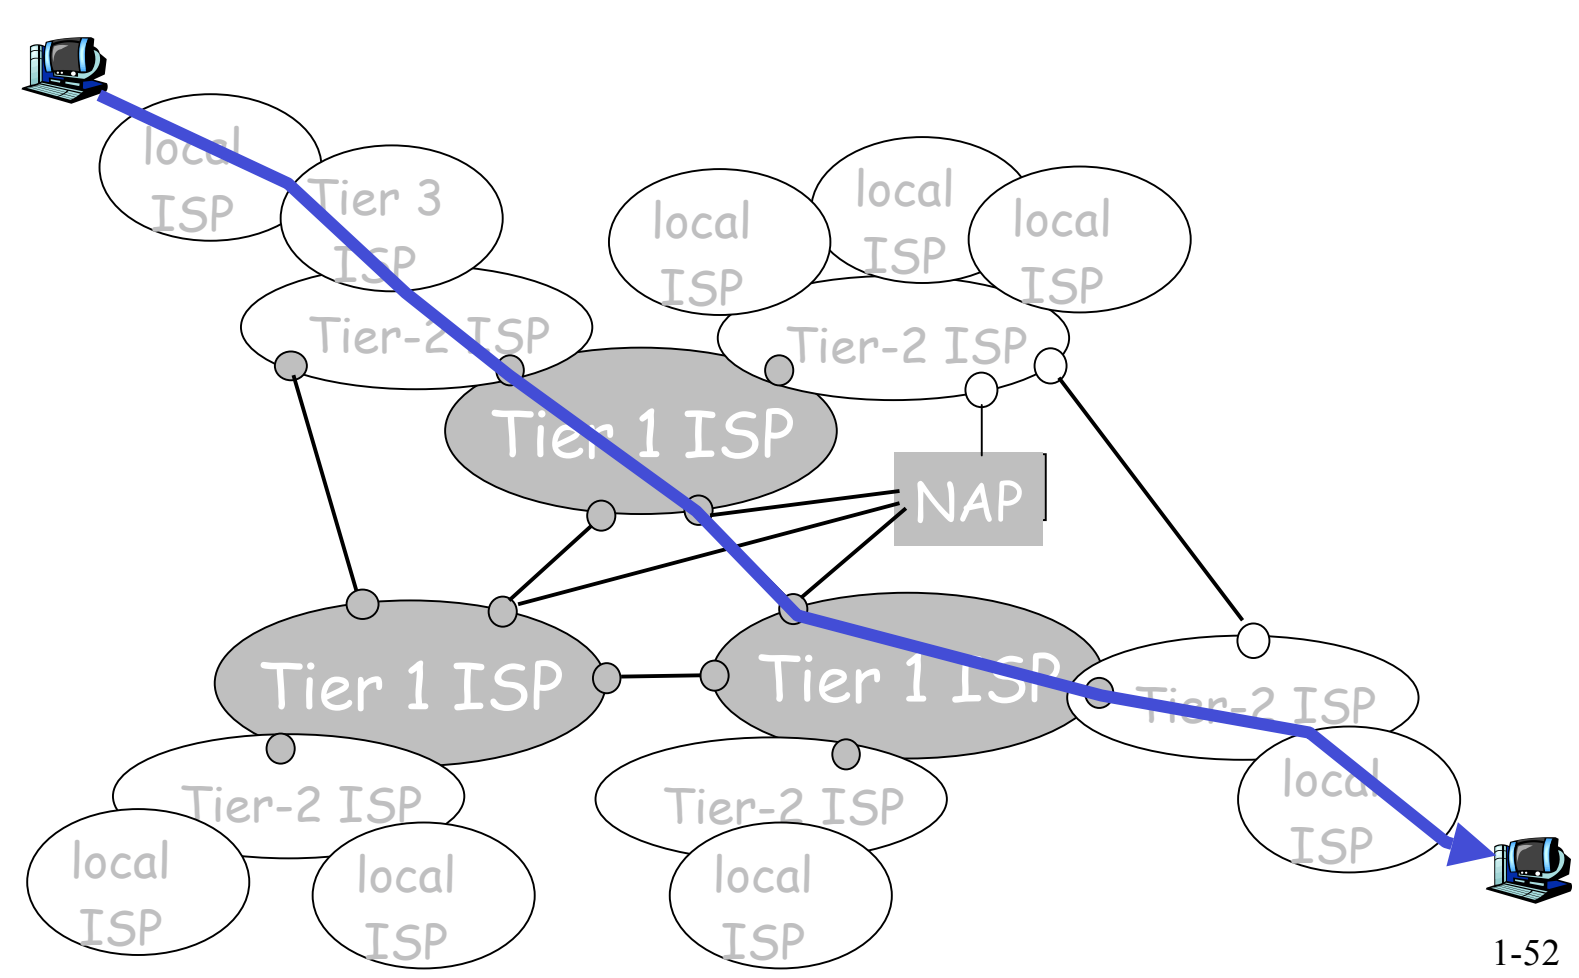

1-52

Chapter 1: roadmap

1-53

How do loss and delay occur?

packets *queue* in router buffers

- packet arrival rate to link exceeds output link capacity
- packets queue, wait for turn

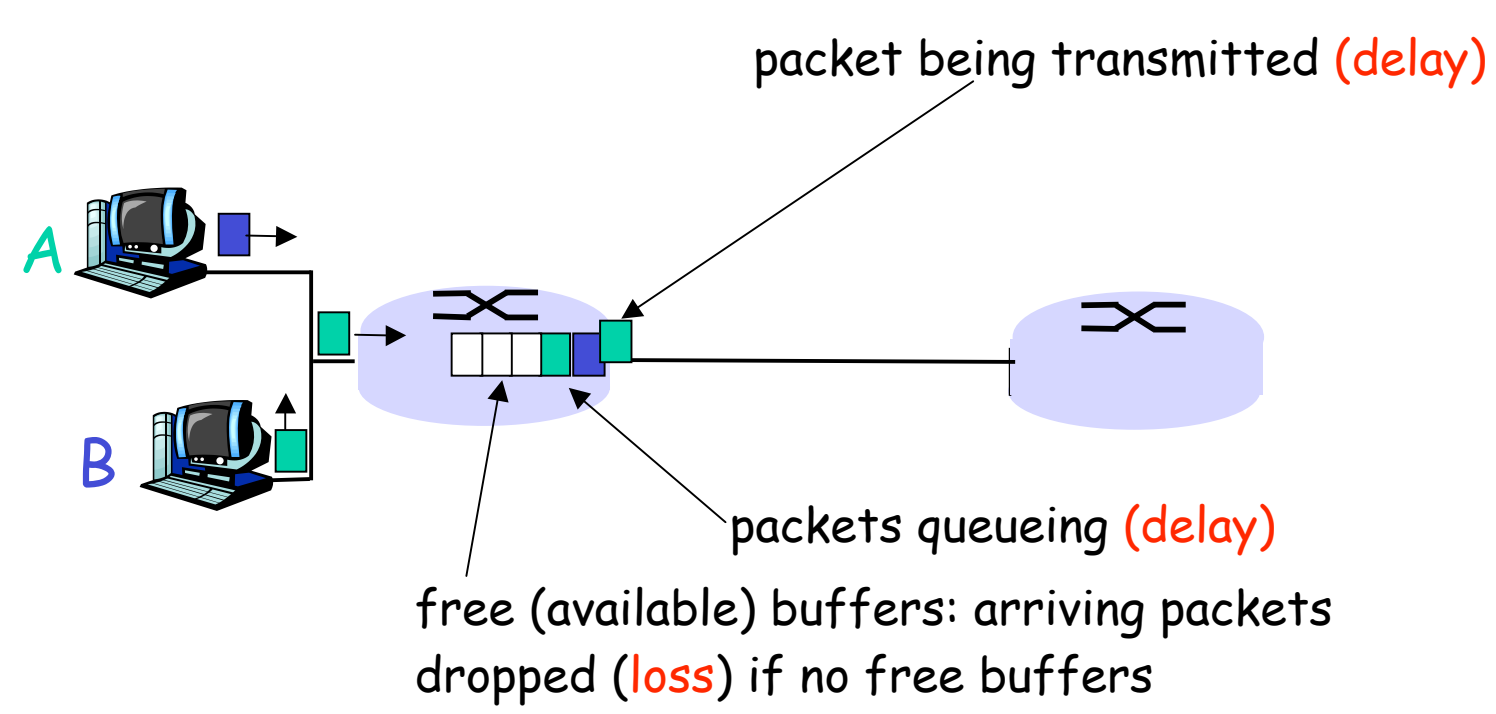

1-54

Four sources of packet delay

- 1. nodal processing:
  - check bit errors
  - determine output link
- 2. queueing
  - time waiting at output link for transmission
  - depends on congestion level of router

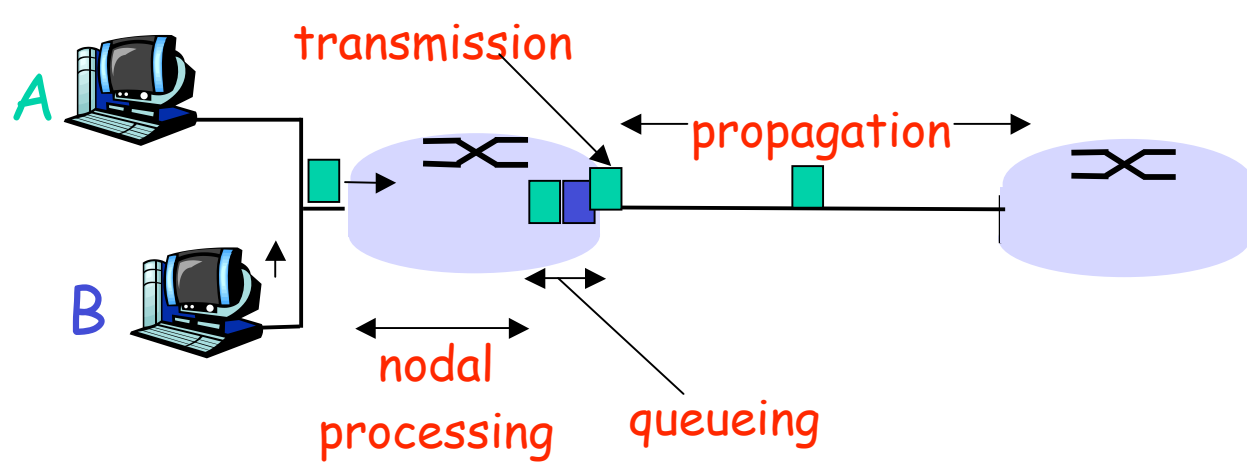

1-55

Delay in packet-switched networks

3. Transmission delay:

- R=link bandwidth (bps)
- L=packet length (bits)
- time to send bits into link = L/R

4. Propagation delay:

- d = length of physical link
- s = propagation speed in medium (~2×10^8 m/sec)
- propagation delay = d/s

Note: s and R are *very* different quantities!

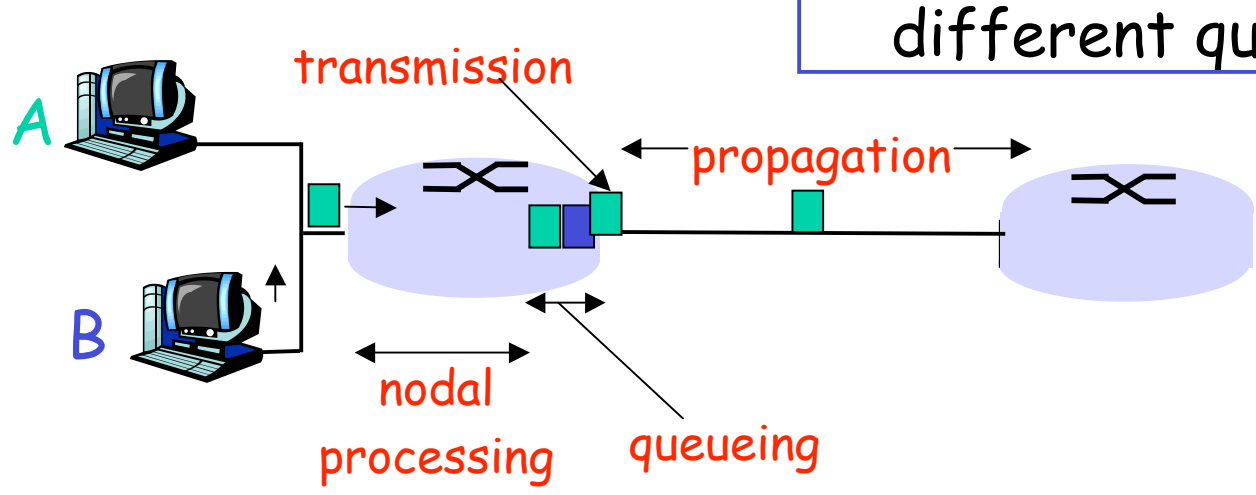

1-56

Caravan analogy

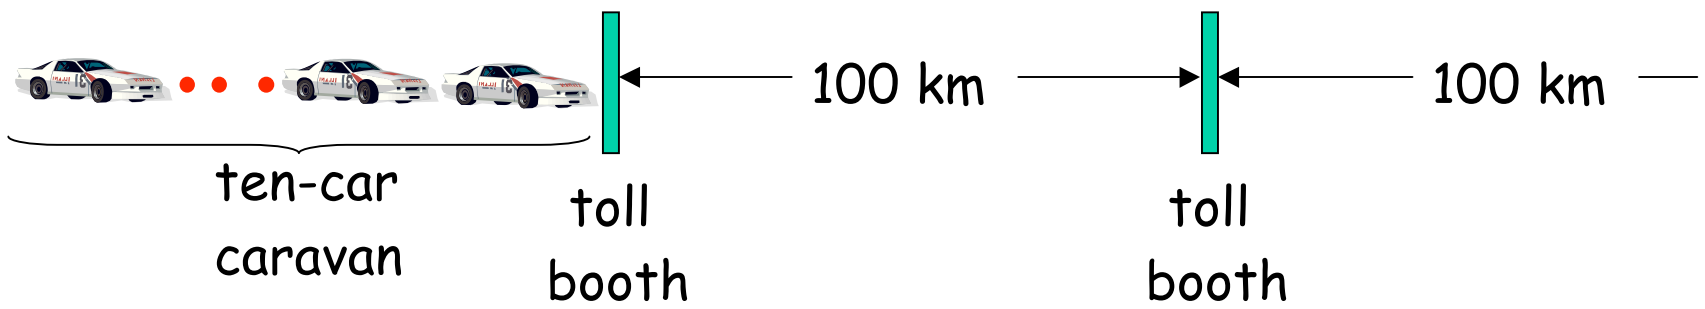

- Cars "propagate" at 100 km/hr
- Toll booth takes 12 sec to service a car (transmission time)
- car~bit; caravan ~ packet
- Q: How long until caravan is lined up before 2nd toll booth?
- Time to "push" entire caravan through toll booth onto highway = 12*10 = 120 sec
- Time for last car to propagate from 1st to 2nd toll both: 100km/(100km/hr)= 1 hr
- A: 62 minutes

Caravan analogy (more)

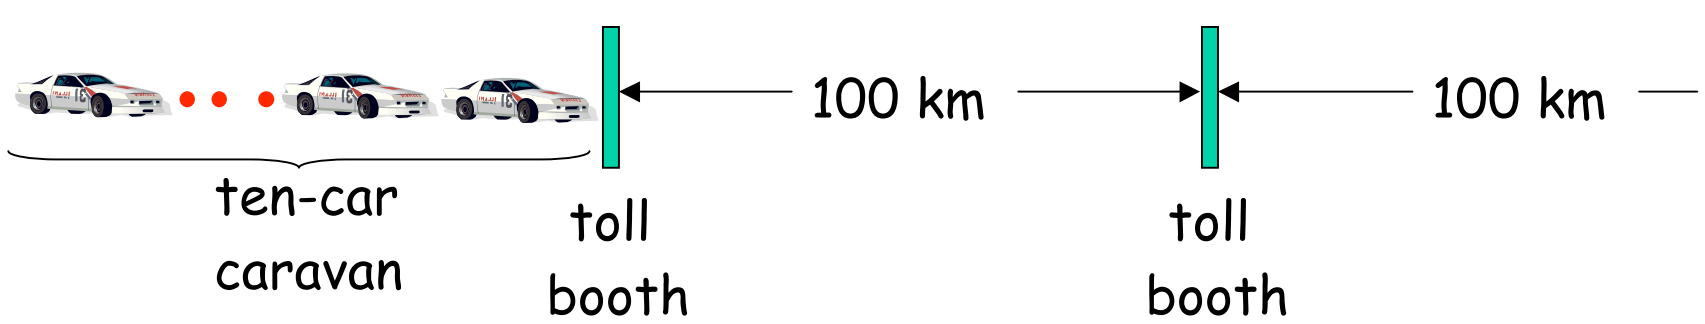

- Cars now "propagate" at 1000 km/hr
- Toll booth now takes 1 min to service a car
- Q: Will cars arrive to 2nd booth before all cars serviced at 1st booth?
- Yes! After 7 min, 1st car at 2nd booth and 3 cars still at 1st booth.
- 1st bit of packet can arrive at 2nd router before packet is fully transmitted at 1st router!
  - See Ethernet applet at AWL Web site

Nodal delay

$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$

- d_{proc} = processing delay
  - typically a few microsecs or less
- d_{queue} = queuing delay
  - depends on congestion
- d_{trans} = transmission delay
  - = L/R, significant for low-speed links
- d_{prop} = propagation delay
  - a few microsecs to hundreds of msecs

1-59

Queueing delay (revisited)

- R=link bandwidth (bps)
- L=packet length (bits)
- a=average packet arrival rate

traffic intensity = La/R

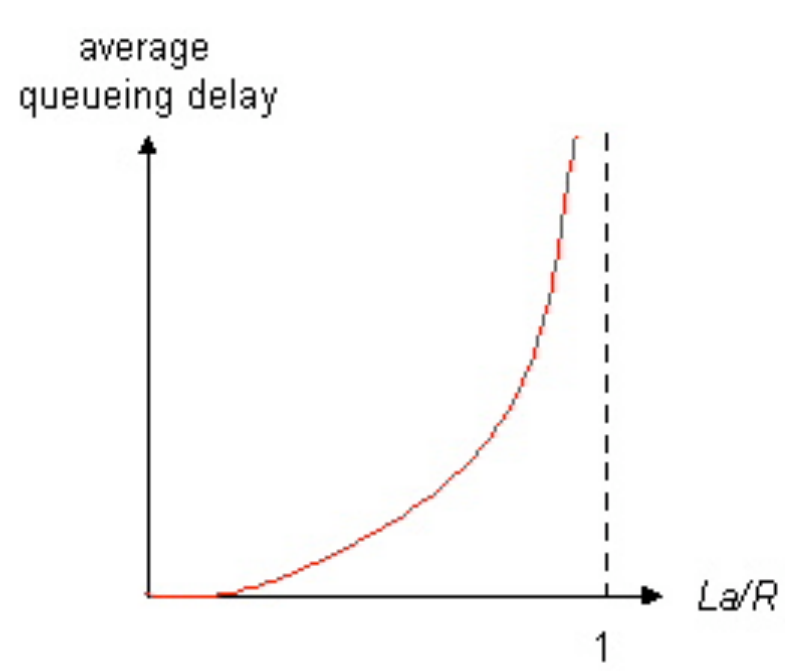

- La/R ~ 0: average queueing delay small
- La/R -> 1: delays become large
- La/R > 1: more "work" arriving than can be serviced, average delay infinite!

1-60

“Real” Internet delays and routes

- What do “real” Internet delay & loss look like?
- **Traceroute program:** provides delay measurement from source to router along end-end Internet path towards destination. For all *i:*
  - sends three packets that will reach router *i* on path towards destination
  - router *i* will return packets to sender
  - sender times interval between transmission and reply.



“Real” Internet delays and routes

traceroute: gaia.cs.umass.edu to www.eurecom.fr

Three delay measurements from gaia.cs.umass.edu to cs-gw.cs.umass.edu

```
1  cs-gw (128.119.240.254)  1 ms  1 ms  2 ms
2  border1-rt-fa5-1-0.gw.umass.edu (128.119.3.145)  1 ms  1 ms  2 ms
3  cht-vbns.gw.umass.edu (128.119.3.130)  6 ms 5 ms 5 ms
4  jn1-at1-0-0-19.wor.vbns.net (204.147.132.129)  16 ms 11 ms 13 ms
5  jn1-so7-0-0-0.wae.vbns.net (204.147.136.136)  21 ms 18 ms 18 ms
6  abilene-vbns.abilene.ucaid.edu (198.32.11.9)  22 ms  18 ms  22 ms
7  nycm-wash.abilene.ucaid.edu (198.32.8.46)  22 ms  22 ms  22 ms
8  62.40.103.253 (62.40.103.253)  104 ms 109 ms 106 ms
9  de2-1.de1.de.geant.net (62.40.96.129)  109 ms 102 ms 104 ms
10  de.fr1.fr.geant.net (62.40.96.50)  113 ms 121 ms 114 ms
11  renater-gw.fr1.fr.geant.net (62.40.103.54)  112 ms  114 ms  112 ms
12  nio-n2.cssi.renater.fr (193.51.206.13)  111 ms  114 ms  116 ms
13  nice.cssi.renater.fr (195.220.98.102)  123 ms  125 ms  124 ms
14  r3t2-nice.cssi.renater.fr (195.220.98.110)  126 ms  126 ms  124 ms
15  eurecom-valbonne.r3t2.ft.net (193.48.50.54)  135 ms  128 ms  133 ms
16  194.214.211.25 (194.214.211.25)  126 ms  128 ms  126 ms
17  * * *
18  * * *
19  fantasia.eurecom.fr (193.55.113.142)  132 ms  128 ms  136 ms
```

trans-oceanic link

* means no response (probe lost, router not replying)

Packet loss

- queue (aka buffer) preceding link in buffer has finite capacity
- when packet arrives to full queue, packet is dropped (aka lost)
- lost packet may be retransmitted by previous node, by source end system, or not retransmitted at all

1-63

Chapter 1: roadmap

1-64

Protocol "Layers"

Networks are complex!

- many "pieces":
  - hosts
  - routers
  - links of various media
  - applications
  - protocols
  - hardware, software

Question:

Is there any hope of *organizing* structure of network?

Or at least our discussion of networks?

1-65

Organization of air travel

ticket (purchase)	ticket (complain)
baggage (check)	baggage (claim)
gates (load)	gates (unload)
runway takeoff	runway landing
airplane routing	airplane routing

airplane routing

- a series of steps

1-66

Layering of airline functionality

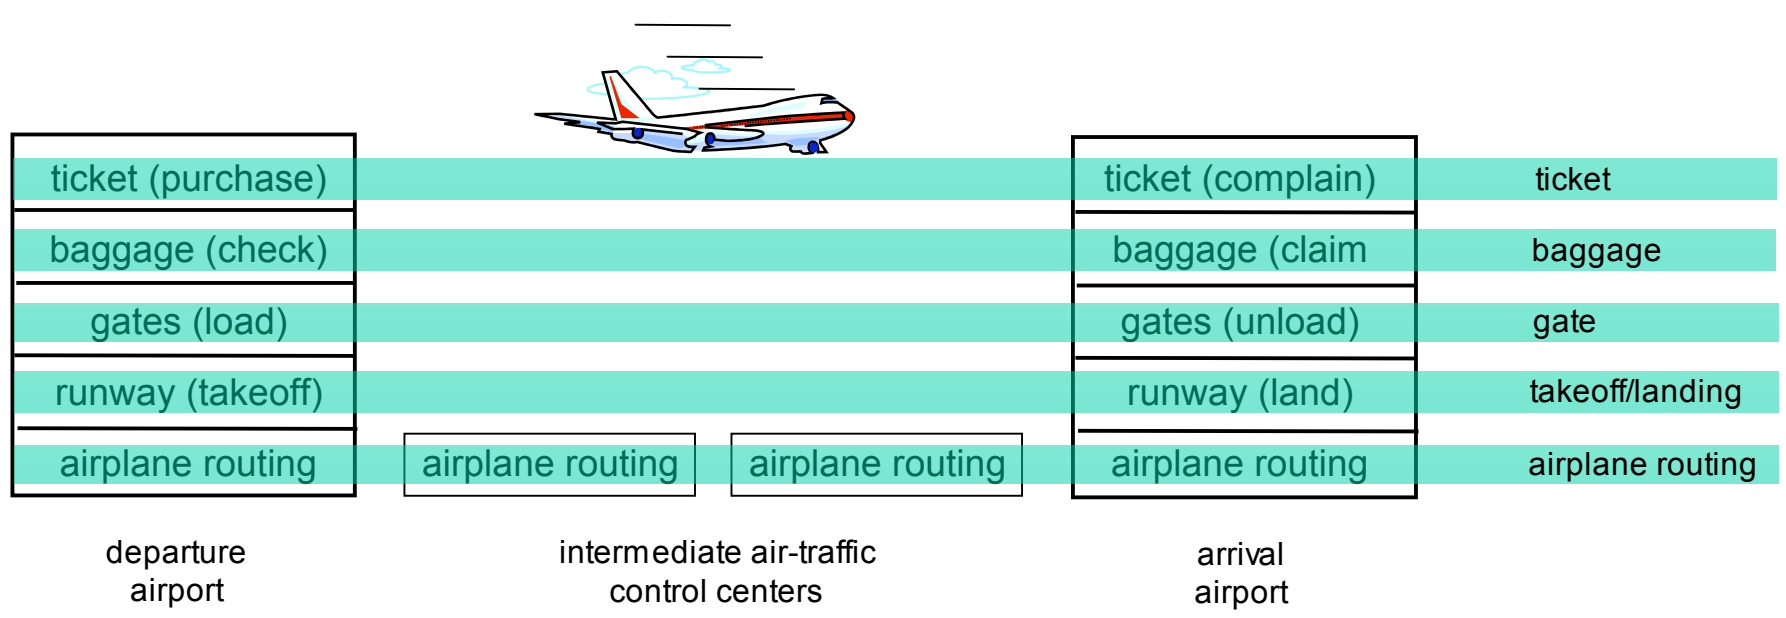

Layers: each layer implements a service

- via its own internal-layer actions
- relying on services provided by layer below

Why layering?

Dealing with complex systems:

- explicit structure allows identification, relationship of complex system's pieces
  - layered reference model for discussion
- modularization eases maintenance, updating of system
  - change of implementation of layer's service transparent to rest of system
  - e.g., change in gate procedure doesn't affect rest of system
- layering considered harmful?

Internet protocol stack

- application: supporting network applications
  - FTP, SMTP, HTTP
- transport: process-process data transfer
  - TCP, UDP
- network: routing of datagrams from source to destination
  - IP, routing protocols
- link: data transfer between neighboring network elements
  - PPP, Ethernet
- physical: bits "on the wire"

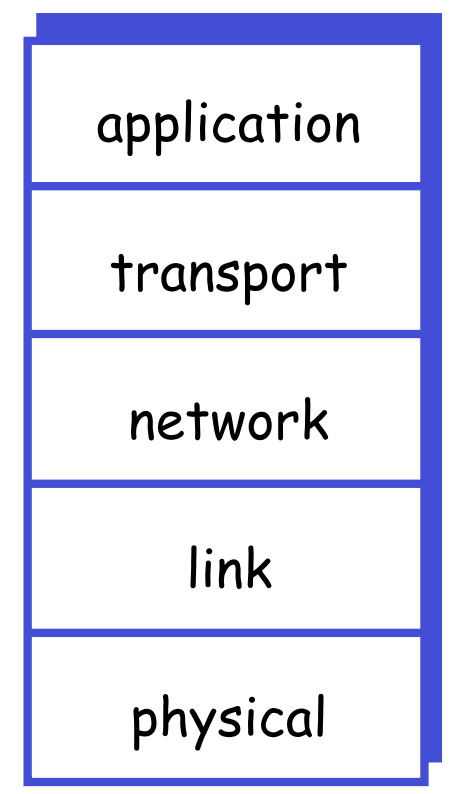

1-69

Encapsulation

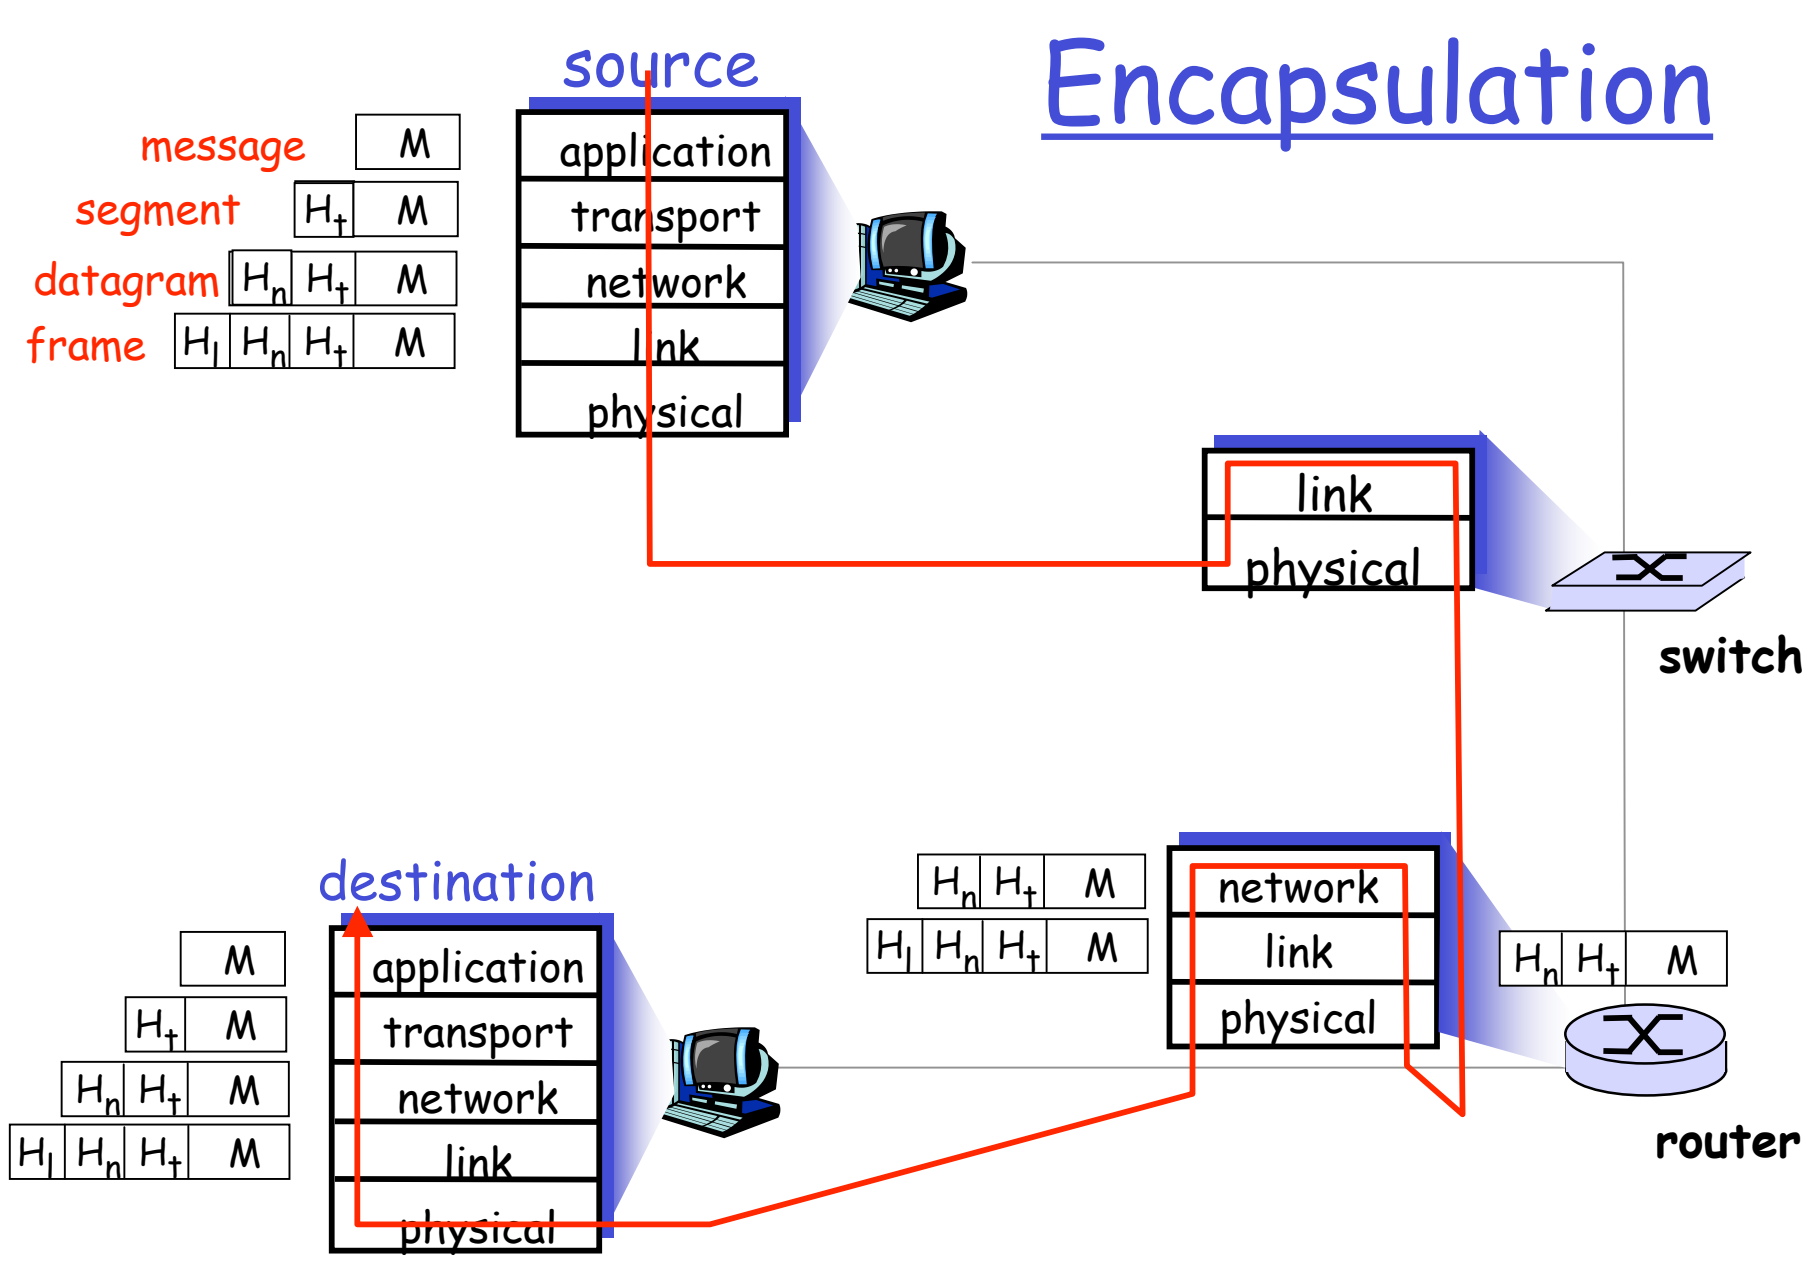

1-70

Chapter 1: roadmap

Internet History

1961-1972: Early packet-switching principles

- 1961: Kleinrock - queueing theory shows effectiveness of packet-switching
- Davies at NPL, England! With packet switching
- 1964: Baran - packet-switching in military nets
- 1967: ARPAnet conceived by Advanced Research Projects Agency
- 1969: first ARPAnet node operational

- 1972:
  - ARPAnet public demonstration
  - NCP (Network Control Protocol) first host-host protocol
  - first e-mail program
  - ARPAnet has 15 nodes



THE ARPA NETWORK

Internet History

1972-1980: Internetworking, new and proprietary nets

- 1970: ALOHAnet satellite network in Hawaii
- 1974: Cerf and Kahn - architecture for interconnecting networks
- 1976: Ethernet at Xerox PARC
- ate70's: proprietary architectures: DECnet, SNA, XNA
- late 70's: switching fixed length packets (ATM precursor)
- 1979: ARPAnet has 200 nodes

Cerf and Kahn's internetworking principles:
- minimalism, autonomy - no internal changes required to interconnect networks
- best effort service model
- stateless routers
- decentralized control

define today's Internet architecture

1-73

Internet History

1980-1990: new protocols, a proliferation of networks

- 1983: deployment of TCP/IP
- 1982: smtp e-mail protocol defined
- 1983: DNS defined for name-to-IP-address translation
- 1985: ftp protocol defined
- 1988: TCP congestion control
- new national networks: Csnet, BITnet, NSFnet, Minitel
- 100,000 hosts connected to confederation of networks

1-74

Internet History

1990, 2000's: commercialization, the Web, new apps

- Early 1990's: ARPAnet decommissioned
- 1991: NSF lifts restrictions on commercial use of NSFnet (decommissioned, 1995)
- early 1990s: Web
  - hypertext [Bush 1945, Nelson 1960's]
  - HTML, HTTP: Berners-Lee
  - 1994: Mosaic, later Netscape
  - late 1990's: commercialization of the Web

Late 1990's – 2000's:

- more killer apps: instant messaging, P2P file sharing
- network security to forefront
- est. 50 million host, 100 million+ users
- backbone links running at Gbps

1-75

Introduction: Summary

Covered a "ton" of material!

- Internet overview
- what's a protocol?
- network edge, core, access network
  - packet-switching versus circuit-switching
- Internet/ISP structure
- performance: loss, delay
- layering and service models
- history

You now have:

- context, overview, "feel" of networking
- more depth, detail *to follow!*

1-76