Physical access has several resource costs

Simulated power, evolution time and detector reads
These quantities are not calibrated energy savings.

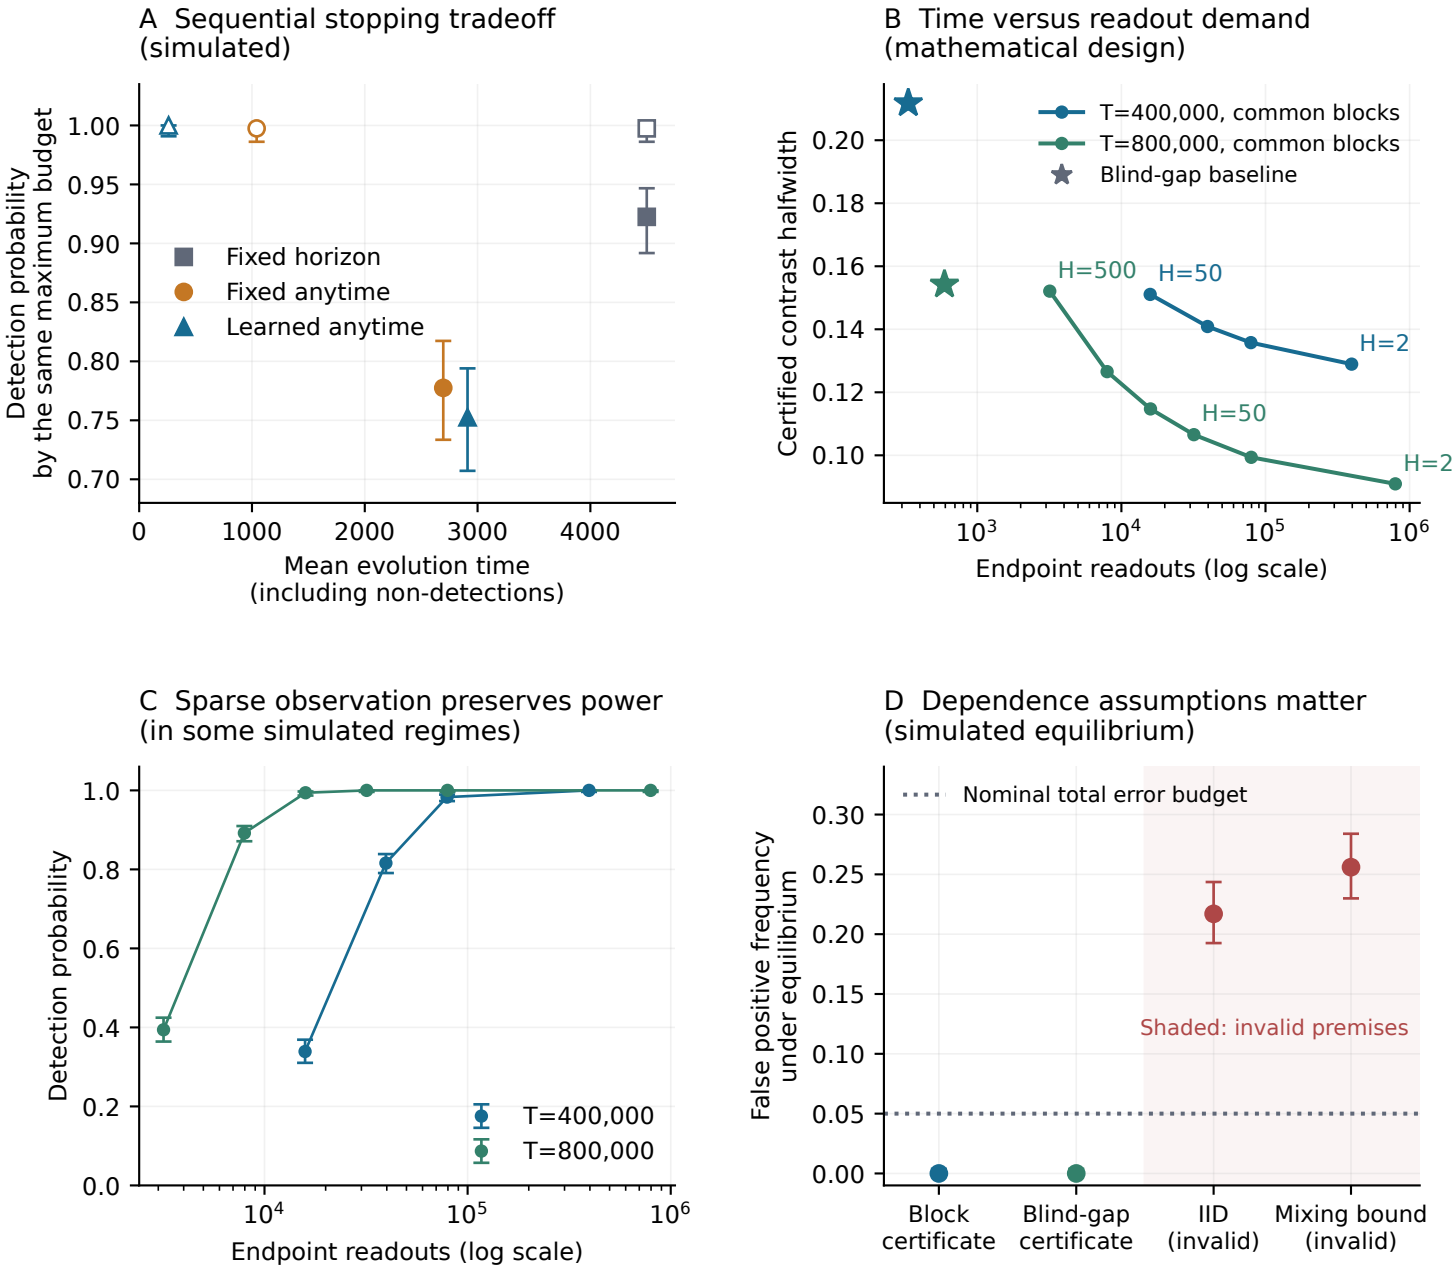

A: 400 runs; filled markers show the original drive, open markers the changed drive. Means include failed runs at their full budget.
B–C match evolution-time budgets, not readout counts. H is block duration. C: 1,000 runs per point. All intervals are pointwise 95% Monte Carlo intervals.
Mixing and initial-law control require separate calibration. Reset, latency and control overhead are additional; no value here is a calibrated joule cost.