
Laser Monitoring Farm Conditions Database Schema ver. 5 July 24, 2006

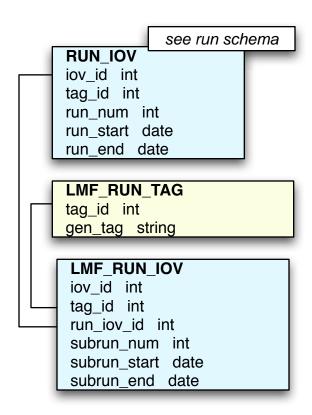

CHANNELVIEW

name string
id1 int
id2 int
id3 int
maps_to string
logic_id int

LMF_RUN_IOV

iov_id int tag_id int run_iov_id int subrun_num int subrun_start date subrun end date

LMF_LASER_IRED_RAW_DAT LMF_LASER_BLUE_RAW_DAT

iov_id int logic_id int (crystal) apd_peak float apd_err float

IME LASER IRED NORM DAT LMF LASER BLUE NORM DAT

iov_id int
logic_id int (crystal)
apd_over_pnA_mean float
apd_over_pnA_rms float
apd_over_pnB_mean float
apd_over_pnB_rms float
apd_over_pn_mean float
apd_over_pn_mean float
apd_over_pn_rms float

LMF_LASER_IRED_COFFF_DAT LMF_LASER_BLUE_COEFF_DAT

iov_id int
logic_id int (crystal)
xport_coeff float
xport_coeff_rms float

IME LASER IRED SHAPE DAT LMF_LASER_BLUE_SHAPE_DAT

iov_id int logic_id int (crystal) alpha float alpha_rms float beta float beta rms float

I ME PN IRED DAT LMF_PN_BLUE_DAT

iov_id int logic_id int (PN diode) pn_peak float pn_err float

LMF_PN_TEST_PULSE_DAT

iov_id int logic_id int (PN diode) adc_mean float adc rms float

LMF PN CONFIG DAT

iov_id int
logic_id int (fanout)
pnA_id int (PN diode)
pnB_id int (PN diode)
pnA_validity bool
pnB_validity bool
pnmean_validity bool