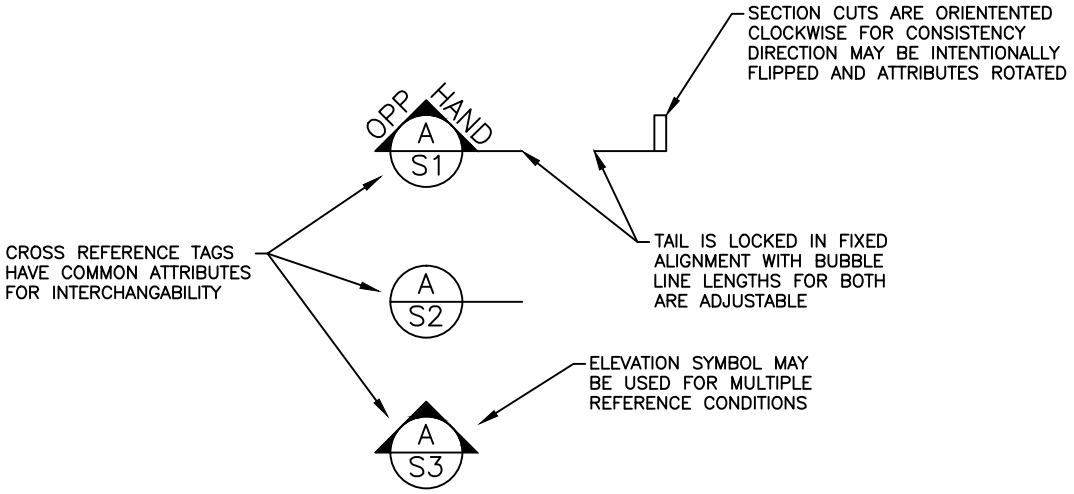

THE CROSS REFERENCE TAG COMBINES SECTION, DETAIL AND ELEVATION TAGS FOR FAST ACCESS AND FLEXIBILITY.

THE CROSS REFERENCE TAG LINEWORK IS BYLAYER. TEXT COLOR IS ASSIGNED.

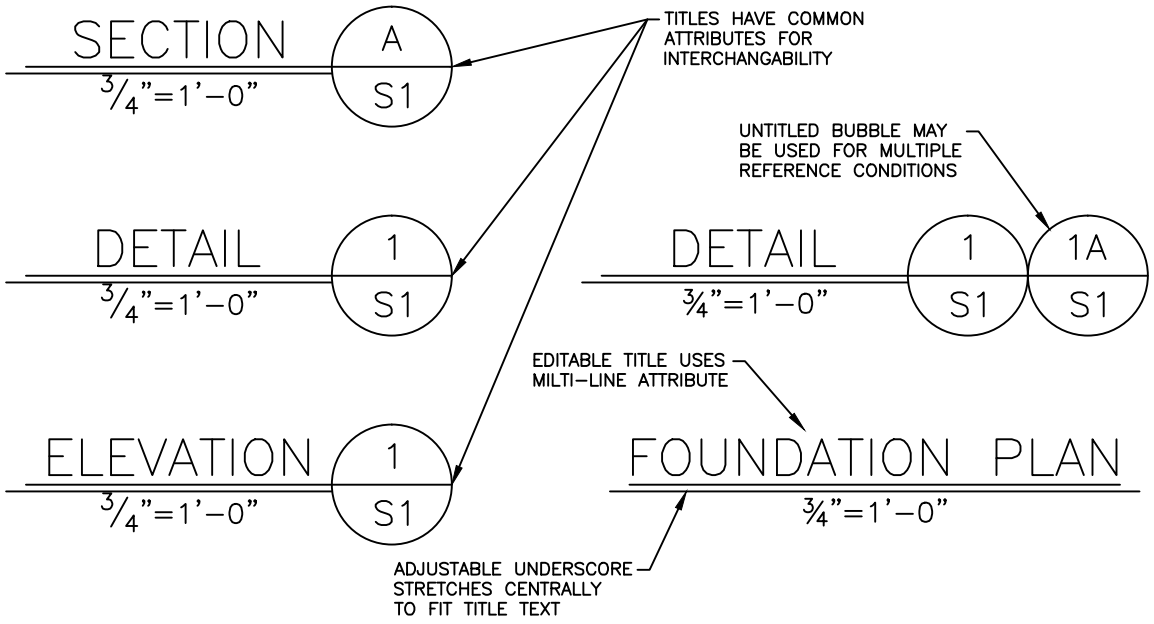

THE TITLE TAG ALLOWS FOR FAST, ALIGNED LABELING.

THE TITLE TAG LINEWORK IS BYLAYER. TEXT COLOR IS ASSIGNED.

THE SCM BLOCKS PROVIDED REPRESENT A COMPOSITE OF SORTS. THE ACTUAL PHYSICAL CHARACTERISTICS OF THE ITEM CAN BE MANIPULATED TO THE COMPANY'S PREFERENCE AND AS LONG AS THE DYNAMICS ARE NOT DISRUPTED THE ITEM WILL PERFORM THE SAME.

ALL ITEMS ARE CREATED ON LAYER 0 AND INSERTED ON THE "S–TAGS" LAYER UNLESS SPECIFICALLY NOTED.

SOME SCM BLOCKS WERE CREATED NOT TO BE EXPLODED. THIS CAN BE ALTERED BY OPENING THE BLOCK IN THE BLOCK EDITOR AND CHANGING THE SETTING, EITHER IN THAT PARTICULAR DRAWING OR IN THE LIBRARY DIRECTORY.

SCM BLOCKS WITH ATTRIBUTES OR TEXT ARE SCALED TO THE CURRENT DIMSCALE UNLESS NOTED.

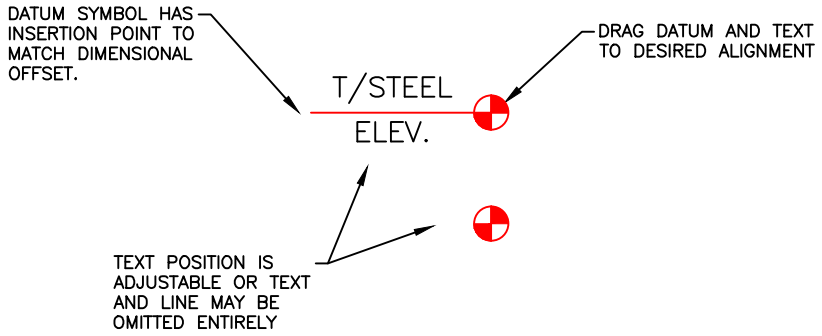

THE DATUM SYMBOL IS DESIGNED FOR FAST ALIGNMENT ON SECTIONS AND ELEVATIONS.

THE DATUM SYMBOL IS INSERTED ON THE S–DIMS LAYER WITH LINEWORK BYLAYER AND TEXT COLOR ASSIGNED.

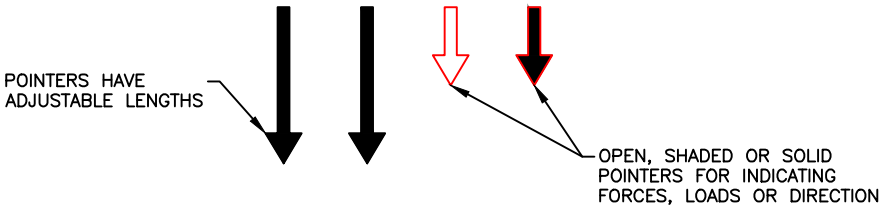

THE POINTER SYMBOL PROVIDES OPTIONS ON LOAD DIAGRAMS AND TRUSS ELEVATIONS.

THE POINTER SYMBOL IS INSERTED ON THE TAGS LAYER WITH COLOR BYBLOCK. THE SHADING COLOR IS ASSIGNED WITHIN THE BLOCK. THE SOLID COLOR IS BYBLOCK, THEREFORE ASSIGNING SHADED COLOR AFTER INSERTING WILL MAKE LINES "INVISIBLE".

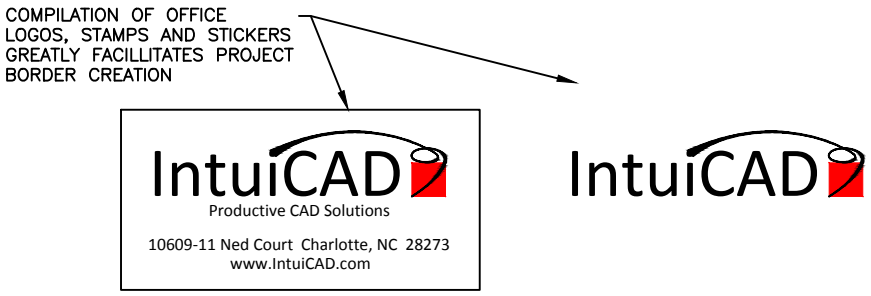

THE LOGO PROVIDED SERVES AS A TEMPLATE FOR COMPANY LOGO CREATION.

THE LOGO SHOULD BE CREATED WITH ALL COLORS ASSIGNED AND A CENTRALLY LOCATED INSERTION THAT FACILITATES BORDER PLACEMENT.

THE LOGO IS INSERTED ON LAYER 0 AND IS SCALED TO THE DIMSCALE.

THE SCM BLOCKS PROVIDED REPRESENT A COMPOSITE OF SORTS. THE ACTUAL PHYSICAL CHARACTERISTICS OF THE ITEM CAN BE MANIPULATED TO THE COMPANY'S PREFERENCE AND AS LONG AS THE DYNAMICS ARE NOT DISRUPTED THE ITEM WILL PERFORM THE SAME.

ALL ITEMS ARE CREATED ON LAYER 0 AND INSERTED ON THE "S–TAGS" LAYER UNLESS SPECIFICALLY NOTED.

SOME SCM BLOCKS WERE CREATED NOT TO BE EXPLODED. THIS CAN BE ALTERED BY OPENING THE BLOCK IN THE BLOCK EDITOR AND CHANGING THE SETTING, EITHER IN THAT PARTICULAR DRAWING OR IN THE LIBRARY DIRECTORY.

SCM BLOCKS WITH ATTRIBUTES OR TEXT ARE SCALED TO THE CURRENT DIMSCALE UNLESS NOTED.

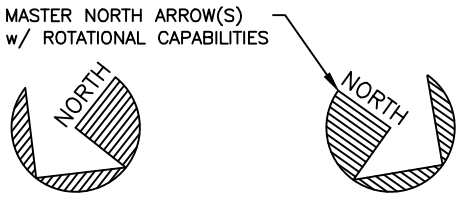

THE NORTH ARROW VARIES WILDLY FROM OFFICE TO OFFICE. THIS ONE WAS SELECTED BECAUSE OF JUSTIFICATION REQUIREMENTS. THE DUAL VISIBILITY MODES ALLOW THE TEXT TO MAINTAIN READING ORIENTATION. SYMMETRICAL NORTH ARROWS AND THOSE WITHOUT TEXT ARE FAR EASIER.

THE NORTH ARROW HEAVY LINEWORK AND TEXT ARE BYLAYER. THE LIGHT LINES ARE ASSIGNED.

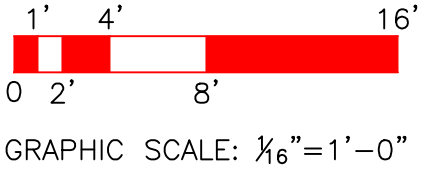

GRAPHIC SCALES ARE INSERTED ON THE "S–TEXT" LAYER WITH THE LINEWORK COLOR ASSIGNED. THEY ARE INSERTED WITH A SACLE OF 1.

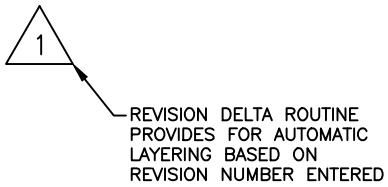

THE REVISION DELTA IS THE ONLY ROUTINE (OUTSIDE THE LAYER MANIPULATORS) THAT CREATES A LAYER THAT MAY NOT ALREADY EXIST. TO DISABLE THIS FEATURE, ENTER A RETURN AT THE REVISION NUMBER PROMPT. THE DELTA WILL BE INSERTED ON THE CURRENT LAYER.

THE REVISION DELTA LINEWORK IS BYLAYER. THE TEXT COLOR IS ASSIGNED.

THE SCM BLOCKS PROVIDED REPRESENT A COMPOSITE OF SORTS. THE ACTUAL PHYSICAL CHARACTERISTICS OF THE ITEM CAN BE MANIPULATED TO THE COMPANY'S PREFERENCE AND AS LONG AS THE DYNAMICS ARE NOT DISRUPTED THE ITEM WILL PERFORM THE SAME.

ALL ITEMS ARE CREATED ON LAYER 0 AND INSERTED ON THE "S–TAGS" LAYER UNLESS SPECIFICALLY NOTED.

SOME SCM BLOCKS WERE CREATED NOT TO BE EXPLODED. THIS CAN BE ALTERED BY OPENING THE BLOCK IN THE BLOCK EDITOR AND CHANGING THE SETTING, EITHER IN THAT PARTICULAR DRAWING OR IN THE LIBRARY DIRECTORY.

SCM BLOCKS WITH ATTRIBUTES OR TEXT ARE SCALED TO THE CURRENT DIMSCALE UNLESS NOTED.

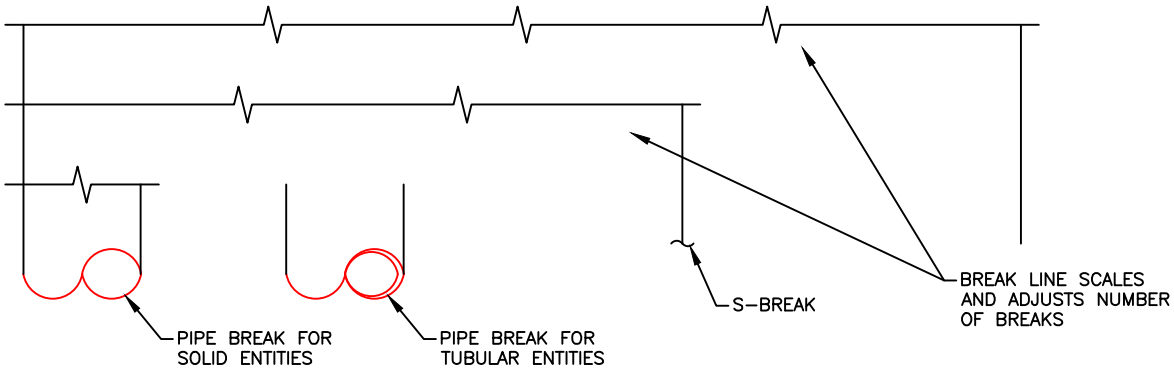

BREAK LINES AND PIPE BREAKS ARE PARAMETRIC ROUTINES THAT DRAW LINEWORK ON THE CURRENT LAYER, USING CURRENT LINETYPE AND COLOR SETTINGS.

THE S–BREAK IS INSERTED ON THE CURRENT LAYER WITH THE COLOR BYBLOCK.

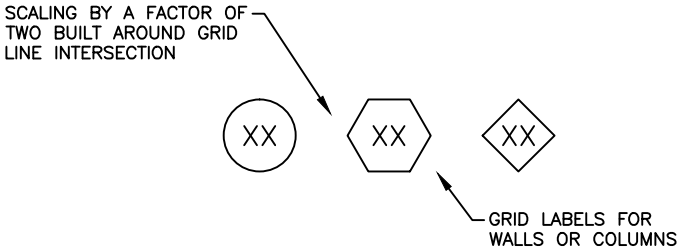

THE GRID LABEL LINEWORK COLOR IS ASSIGNED DURING INSERTION AND THE ATTRIBUTE COLOR IS BYLAYER. THE GRID LABEL LINEWORK LINETYPE IS BYBLOCK.

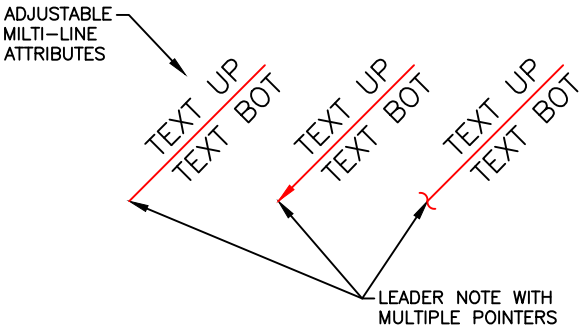

THE LEADER NOTE IS AN ALL PURPOSE LABEL FOR COLUMNS, FOOTINGS OR PIERS, DEPENDING ON OFFICE PRACTICES. AT THE LEAST, IT IS A PLATFORM FOR OTHER BLOCKS. IF NOT FOR THE EXISTING VISIBILITY PARAMETER EXCHANGING ARROWHEADS, TAILS AND ADDITIONAL NOTATION COULD EASILY BE ADDED TO CREATE A "SUPER TAG".

THE LEADER NOTE IS INSERTED ON THE "S–TEXT" LAYER WITH THE LINEWORK COLOR ASSIGNED UPON INSERTION.

THE SCM BLOCKS PROVIDED REPRESENT A COMPOSITE OF SORTS. THE ACTUAL PHYSICAL CHARACTERISTICS OF THE ITEM CAN BE MANIPULATED TO THE COMPANY'S PREFERENCE AND AS LONG AS THE DYNAMICS ARE NOT DISRUPTED THE ITEM WILL PERFORM THE SAME.

ALL ITEMS ARE CREATED ON LAYER 0 AND INSERTED ON THE "S–TAGS" LAYER UNLESS SPECIFICALLY NOTED.

SOME SCM BLOCKS WERE CREATED NOT TO BE EXPLODED. THIS CAN BE ALTERED BY OPENING THE BLOCK IN THE BLOCK EDITOR AND CHANGING THE SETTING, EITHER IN THAT PARTICULAR DRAWING OR IN THE LIBRARY DIRECTORY.

SCM BLOCKS WITH ATTRIBUTES OR TEXT ARE SCALED TO THE CURRENT DIMSCALE UNLESS NOTED.

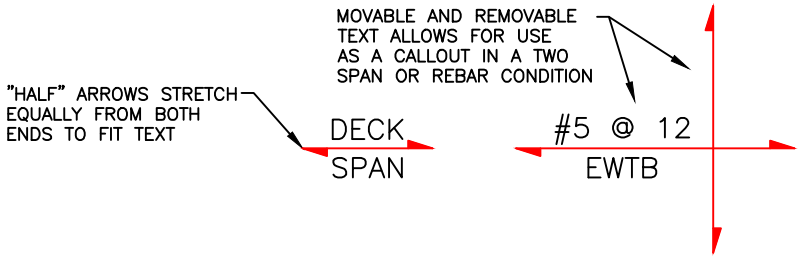

THE SPAN INDICATOR INSERTS ON THE "S–TEXT" LAYER WITH THE LINEWORK ASSIGNED.

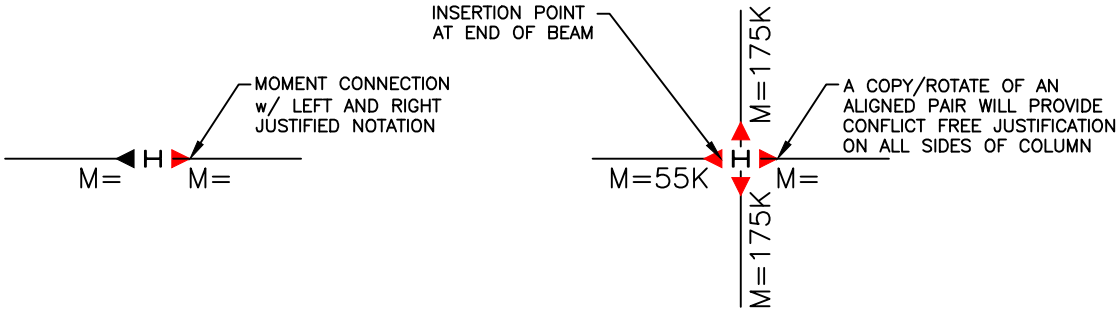

THE MOMENT CONNECTION LINEWORK COLOR IS ASSIGNED WITHIN THE BLOCK.

THE TEXT COLOR IS BYBLOCK AND ASSIGNED DURING INSERTION.

THE MOMENT CONNECTION SYMBOL IS INSERTED ON THE "S–STEL–BEAM" LAYER FOR CONVENIENCE OF VIEWING (AND EDITING) FORCES WHILE THE TEXT LAYER MAY BE OFF OR FROZEN. IT CONVERSLY ALSO ALLOWS THE FORCES TO BE TURNED WHEN THE FRAMING LINEWORK IS NOT AVAILABLE.

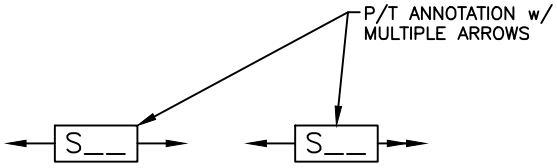

THE POST TENSION SYMBOL COMBINES THE FLEXIBILITY OF AN ASSOCIATIVE DIMENSION WITH BOLD LINEWORK WHILE ALLOWING QUICK EDITING OF ARROW ENDS.

THE POST TENSION SYMBOL LINEWORK IS ASSIGNED WITHIN THE BLOCK AND THE TEXT IS ASSIGNED DURING INSERTION.

THE SCM BLOCKS PROVIDED REPRESENT A COMPOSITE OF SORTS. THE ACTUAL PHYSICAL CHARACTERISTICS OF THE ITEM CAN BE MANIPULATED TO THE COMPANY'S PREFERENCE AND AS LONG AS THE DYNAMICS ARE NOT DISRUPTED THE ITEM WILL PERFORM THE SAME.

ALL ITEMS ARE CREATED ON LAYER 0 AND INSERTED ON THE "S–TAGS" LAYER UNLESS SPECIFICALLY NOTED.

SOME SCM BLOCKS WERE CREATED NOT TO BE EXPLODED. THIS CAN BE ALTERED BY OPENING THE BLOCK IN THE BLOCK EDITOR AND CHANGING THE SETTING, EITHER IN THAT PARTICULAR DRAWING OR IN THE LIBRARY DIRECTORY.

SCM BLOCKS WITH ATTRIBUTES OR TEXT ARE SCALED TO THE CURRENT DIMSCALE UNLESS NOTED.

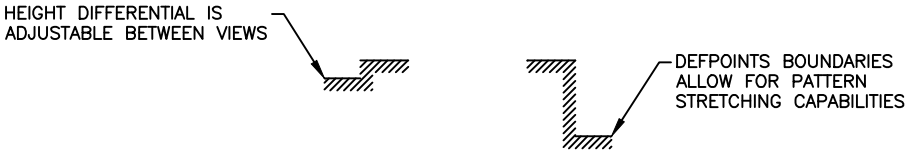

THE DEPRESSION INDICATOR HAS A VISIBILITY "REVERSE" INSTEAD OF A "FLIP" ACTION IN ORDER TO MAINTAIN CONSISTENT HATCH DIRECTION.

THE DEPRESSION SYMBOL HATCH IS ASSIGNED WITHINTHE BLOCK. THE VISIBLE LINEWORK COLOR IS ASSIGNED UPON INSERTION.



THE BAR BEND/SLOPE NOTE IS DESIGNED TO BE EXPLODED USING AUTOCAD'S BURST COMMAND (OR THE BONUS "LX" ROUTINE) UPON SELECTION OF THE DESIRED NOTE.

THE BAR BEND/SLOPE NOTE IS NOT EDITABLE AS A BLOCK.



THE CODED NOTES BLOCK HAS SYNCHRONIZED ATTRIBUTES THAT MAINTAIN THEIR VALUE AFTER THE SHAPE RE–SELECTED.

THE SCM BLOCKS PROVIDED REPRESENT A COMPOSITE OF SORTS. THE ACTUAL PHYSICAL CHARACTERISTICS OF THE ITEM CAN BE MANIPULATED TO THE COMPANY'S PREFERENCE AND AS LONG AS THE DYNAMICS ARE NOT DISRUPTED THE ITEM WILL PERFORM THE SAME.

ALL ITEMS ARE CREATED ON LAYER 0 AND INSERTED ON THE "S–TAGS" LAYER UNLESS SPECIFICALLY NOTED.

SOME SCM BLOCKS WERE CREATED NOT TO BE EXPLODED. THIS CAN BE ALTERED BY OPENING THE BLOCK IN THE BLOCK EDITOR AND CHANGING THE SETTING, EITHER IN THAT PARTICULAR DRAWING OR IN THE LIBRARY DIRECTORY.

SCM BLOCKS WITH ATTRIBUTES OR TEXT ARE SCALED TO THE CURRENT DIMSCALE UNLESS NOTED.