

TRANSVERSE REINFORCING BARS ARE MADE USING AUTOCAD'S DONUT COMMAND.

THE SOLID REINFORCING BAR HAS AN OUTER DIAMETER OF ¾" AND AN INNER DIAMETER OF 0. THE HOLLOW BAR HAS AN OUTSIDE DIAMETER OF ¾" AND AN INNER DIAMETER OF ⅜"

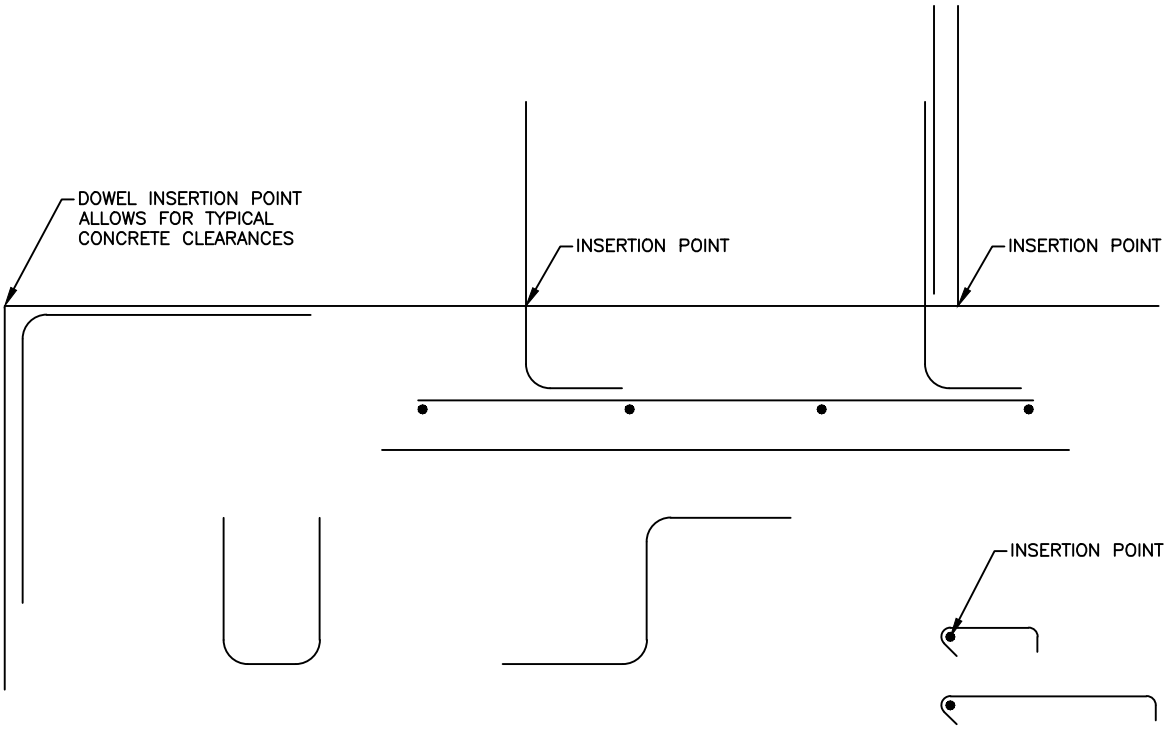

THE MAGIG NUMBER TO REMEMBER TO MATCH THE LINEWORK IN THE REINFORCING DOWEL BLOCK IS ¾". ALL CLEARANCES BETWEEN BARS AS WELL AS STIRRUP/TIE RADII ARE ¾". DOWEL BAR BEND RADII ARE DRAWN AT 2". WHILE NEITHER OF THESE NUMBERS REPRESENTS ACTUAL FIELD CONDITIONS, THEY FUNCTION WELL IN LEAVING NOTICEABLE GAPS BETWEEN THE LINEWORK AND MAKE LAPPING LESS DISTORTED.

ALTHOUGH THE LINEWORK IS QUITE SIMPLISTIC, THE DOWEL BLOCK HANDLES SECONDARY EDITING FAR MORE EFFICIENTLY THAN THE EXPLODED LINEWORK.

THE REINFORCING DOWEL BLOCK LINEWORK ASSUMES ZERO BAR WIDTH FOR THE PURPOSES OF MEASURING FOR CLEARANCES.

THE CONCRETE REINFORCING BLOCKS AND ACCESSORIES PROVIDED REPRESENT LESS OF A COMPOSITE OF INDUSTRY STANDARDS THAN A COMPILATION OF "NOT QUITE TO SCALE" DRAFTING TECHNIQUES. THE ACTUAL PHYSICAL CHARACTERISTICS OF THE ITEMS CAN BE MANIPULATED TO THE COMPANY'S PREFERENCE AND AS LONG AS THE DYNAMICS ARE NOT DISRUPTED THE ITEMS WILL PERFORM THE SAME. ACTUAL MEMBER SIZES MAY VARY GREATLY WITH FABRICATOR, MANUFACTURER AND DESIGN CONDITIONS.

SOME SCM BLOCKS WERE CREATED NOT TO BE EXPLODED. THIS CAN BE ALTERED BY OPENING THE BLOCK IN THE BLOCK EDITOR AND CHANGING THE SETTING, EITHER IN THAT PARTICULAR DRAWING OR IN THE LIBRARY DIRECTORY.

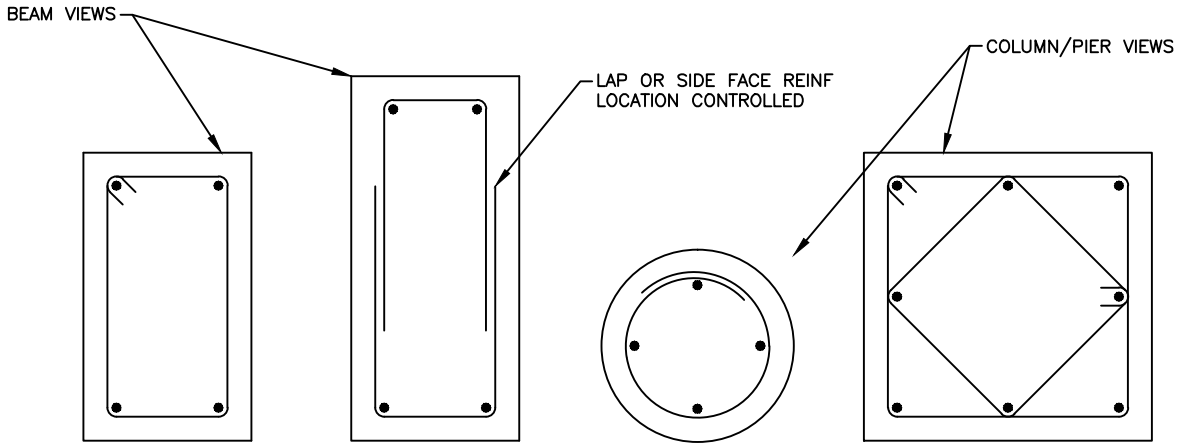

THE MAGIG NUMBER TO REMEMBER TO MATCH THE LINEWORK IN THE STIRRUP/TIE BLOCK IS ¾". ALL CLEARANCES BETWEEN BARS AS WELL AS STIRRUP/TIE RADII ARE ¾". WHILE THIS NUMBER MAY NOT REPRESENT ACTUAL FIELD CONDITIONS, IT FUNCTIONS WELL IN LEAVING NOTICEABLE GAPS BETWEEN THE LINEWORK AND MAKE LAPPING LESS DISTORTED.

ALTHOUGH THE LINEWORK IS QUITE SIMPLISTIC, THE BLOCK IS EASILY EXPANDED INTO PIER, COLUMN AND GRADE BEAM DETAILS.

THE REINFORCING STIRRUP/TIE BLOCK LINEWORK ASSUMES ZERO BAR WIDTH FOR THE PURPOSES OF MEASURING FOR CLEARANCES.

THE THREADED BAR COUPLER PROVIDES A QUICK GENERIC SOLUTION FOR DELINEATING FIELD SPLICES.

THE THREADED BAR COUPLER BLOCK LINEWORK COLOR IS BYBLOCK. IT IS INSERTED ON THE "S–RBAR" LAYER.



THE WELDED WIRE FABRIC BLOCK ALLOWS FAST ACCESS TO WIRE MESH OR FENCING.

THE CONCRETE REINFORCING BLOCKS AND ACCESSORIES PROVIDED REPRESENT LESS OF A COMPOSITE OF INDUSTRY STANDARDS THAN A COMPILATION OF "NOT QUITE TO SCALE" DRAFTING TECHNIQUES. THE ACTUAL PHYSICAL CHARACTERISTICS OF THE ITEMS CAN BE MANIPULATED TO THE COMPANY'S PREFERENCE AND AS LONG AS THE DYNAMICS ARE NOT DISRUPTED THE ITEMS WILL PERFORM THE SAME. ACTUAL MEMBER SIZES MAY VARY GREATLY WITH FABRICATOR, MANUFACTURER AND DESIGN CONDITIONS.

SOME SCM BLOCKS WERE CREATED NOT TO BE EXPLODED. THIS CAN BE ALTERED BY OPENING THE BLOCK IN THE BLOCK EDITOR AND CHANGING THE SETTING, EITHER IN THAT PARTICULAR DRAWING OR IN THE LIBRARY DIRECTORY.

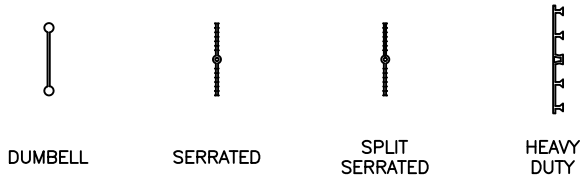

THE WATERSTOP BLOCK LINEWORK IS BYBLOCK. IT IS INSERTED ON THE "S-RBAR" LAYER.



THE SHEAR KEY TOOL IS A PARAMETRIC ROUTINE THAT CREATES A CENTERED 2x4 KEY IN A CONCRETE WALL. THE KEY IS DRAWN ON THE CURRENT LAYER.

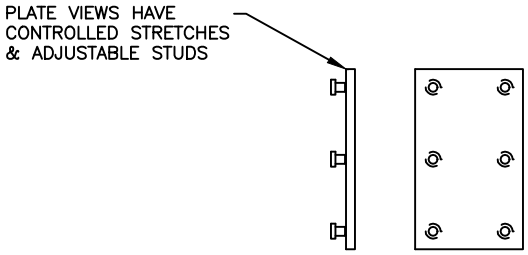

THE EMBEDDED PLATE BLOCK LINEWORK COLOR IS BYLAYER WITH THE BOLTHEADS ASSIGNED. THE BLOCK IS ASSIGNED A HIDDEN LINETYPE.

DO NOT PUT DYNAMIC FASTENERS INSIDE OF EMBEDDED PLATE BLOCK. DOING SO MAY CAUSE THE DYNAMICS OF THE ENTIRE BLOCK TO FAIL AS WELL AS THE DYNAMICS IN OTHER OCCURANCES OF THE FASTENER BLOCK.

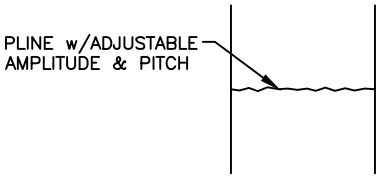

THE ROUGHEN TOOL IS A PARAMETRIC ROUTINE THAT CREATES A JAGGED POLYLINE. THE POLYLINE CHARACTERISTICS MATCH THOSE OF THE SELECTED LINE.

THE CONCRETE REINFORCING BLOCKS AND ACCESSORIES PROVIDED REPRESENT LESS OF A COMPOSITE OF INDUSTRY STANDARDS THAN A COMPILATION OF "NOT QUITE TO SCALE" DRAFTING TECHNIQUES. THE ACTUAL PHYSICAL CHARACTERISTICS OF THE ITEMS CAN BE MANIPULATED TO THE COMPANY'S PREFERENCE AND AS LONG AS THE DYNAMICS ARE NOT DISRUPTED THE ITEMS WILL PERFORM THE SAME. ACTUAL MEMBER SIZES MAY VARY GREATLY WITH FABRICATOR, MANUFACTURER AND DESIGN CONDITIONS.

SOME SCM BLOCKS WERE CREATED NOT TO BE EXPLODED. THIS CAN BE ALTERED BY OPENING THE BLOCK IN THE BLOCK EDITOR AND CHANGING THE SETTING, EITHER IN THAT PARTICULAR DRAWING OR IN THE LIBRARY DIRECTORY.

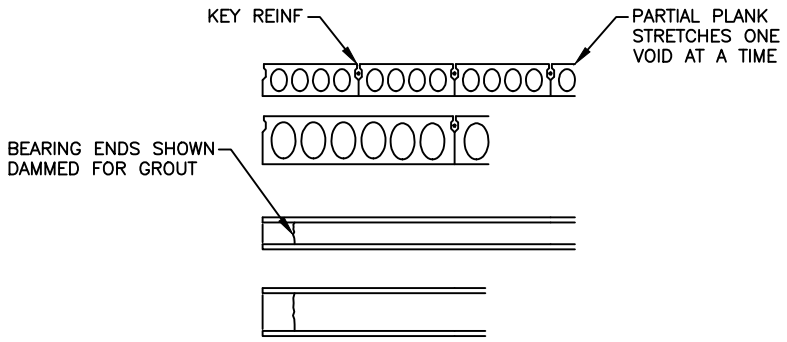

THE HOLLOW CORE PRECAST PLANK BLOCK PROFILES HAVE BEEN CAREFULLY WEIGHED FOR DRAFTING COHESION AS WELL AS INDUSTRY ACCURACY. WHERE ALL OTHER THINGS WERE EQUAL, PREFERENCE WAS GIVEN TO THOSE PROFILES WITH EQUAL PITCH SINCE THIS ALLOWS INTERCHANGABILITY AMONG PLANK DEPTHS.

NEARLY ALL HOLLOW CORE PRECAST PLANK BLOCK EDGE LINEWORK IS BYLAYER. THE EXCEPTIONS ARE THE END LINE IN ELEVATION (BYBLOCK) AND THE REINFORCING BARS (ASSIGNED WITHIN THE BLOCK).

THE HOLLOW CORE PRECAST PLANK BLOCK IS INSERTED ON THE "S–SECT–CONC" LAYER.

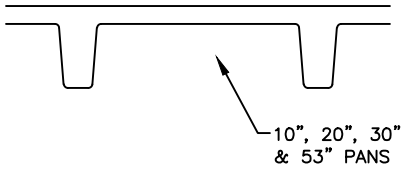

THE CONCRETE PAN JOIST BLOCK PROVIDES QUICK ACCESS TO WIDE SPAN JOIST PROFILES.

THE CONCRETE PAN JOIST BLOCK IS INSERTED ON THE "S–SECT–CONC" LAYER.

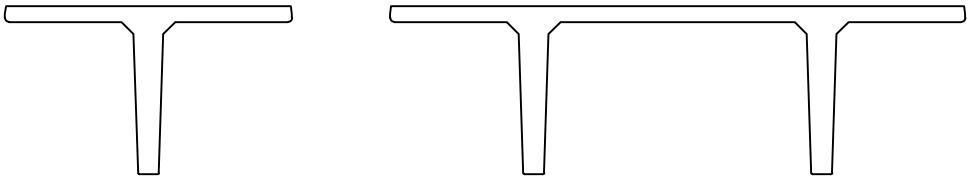

THE SINGLE AND DOUBLE TEE BLOCKS PROVIDES QUICK ACCESS TO TEE SECTION PROFILES.

THE SINGLE AND DOUBLE TEE BLOCKS ARE INSERTED ON THE "S–SECT–CONC" LAYER.

THE PRECAST CONCRETE CONFIGURATIONS PROVIDED REPRESENT A COMPOSITE OF SORTS. THE ACTUAL PHYSICAL CHARACTERISTICS OF THE ITEMS CAN BE MANIPULATED TO THE COMPANY'S PREFERENCE AND AS LONG AS THE DYNAMICS ARE NOT DISRUPTED THE ITEMS WILL PERFORM THE SAME. ACTUAL MEMBER SIZES MAY VARY GREATLY WITH MANUFACTURER AND DESIGN CONDITIONS.

SOME SCM BLOCKS WERE CREATED NOT TO BE EXPLODED. THIS CAN BE ALTERED BY OPENING THE BLOCK IN THE BLOCK EDITOR AND CHANGING THE SETTING, EITHER IN THAT PARTICULAR DRAWING OR IN THE LIBRARY DIRECTORY.

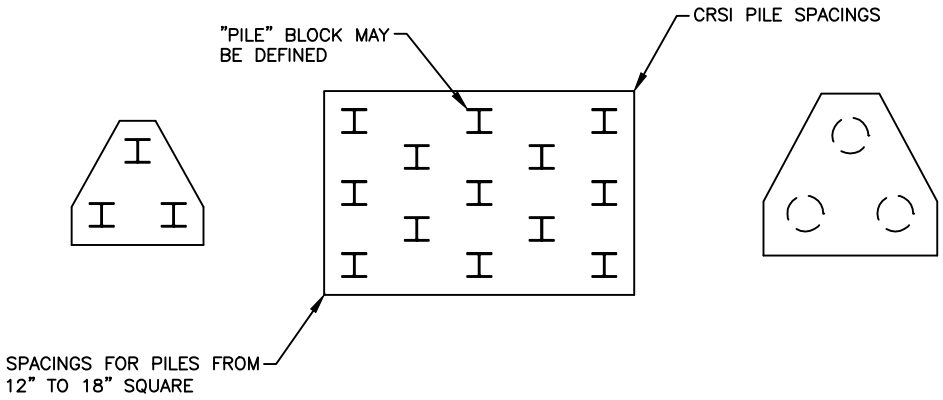

THE CONCRETE PILE CAP BLOCKS ARE EMBEDDED WITH PILE BLOCKS DENOTING THEIR SIZE FAMILY (IN INCHES). ONCE THE PILE CAPACITY HAS BEEN SELECTED, REDEFINING THE PILE BLOCK WITH THE APPROPRIATE CROSS SECTION WILL UPDATE THE BLOCKS OF THAT FAMILY OF CAPS.

A BLOCK OF DIMENSIONED CAP DETAILS IS INCLUDED IN THE BONUS TOOLS.

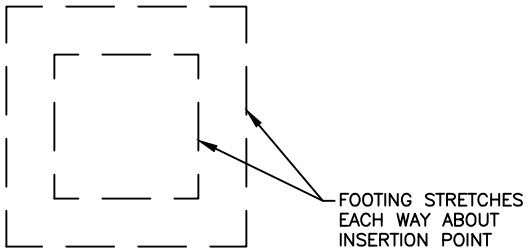

THE FOOTING BLOCK MAKES A GREAT PLACEHOLDER IN THE EARLY STAGES OF FOUNDATION DESIGN. SIMPLE BUT HIGHLY EFFECTIVE.

THE CONCRETE CAP CONFIGURATIONS PROVIDED ARE FROM THE TABLES OF THE CRSI HANDBOOK OF CONCRETE DETAILING. THE ACTUAL PHYSICAL CHARACTERISTICS OF THE ITEMS CAN BE MANIPULATED TO THE COMPANY'S PREFERENCE AND AS LONG AS THE DYNAMICS ARE NOT DISRUPTED THE ITEMS WILL PERFORM THE SAME. ACTUAL CONCRETE CAP SIZES MAY VARY GREATLY WITH DESIGN CONDITIONS.

SOME SCM BLOCKS WERE CREATED NOT TO BE EXPLODED. THIS CAN BE ALTERED BY OPENING THE BLOCK IN THE BLOCK EDITOR AND CHANGING THE SETTING, EITHER IN THAT PARTICULAR DRAWING OR IN THE LIBRARY DIRECTORY.

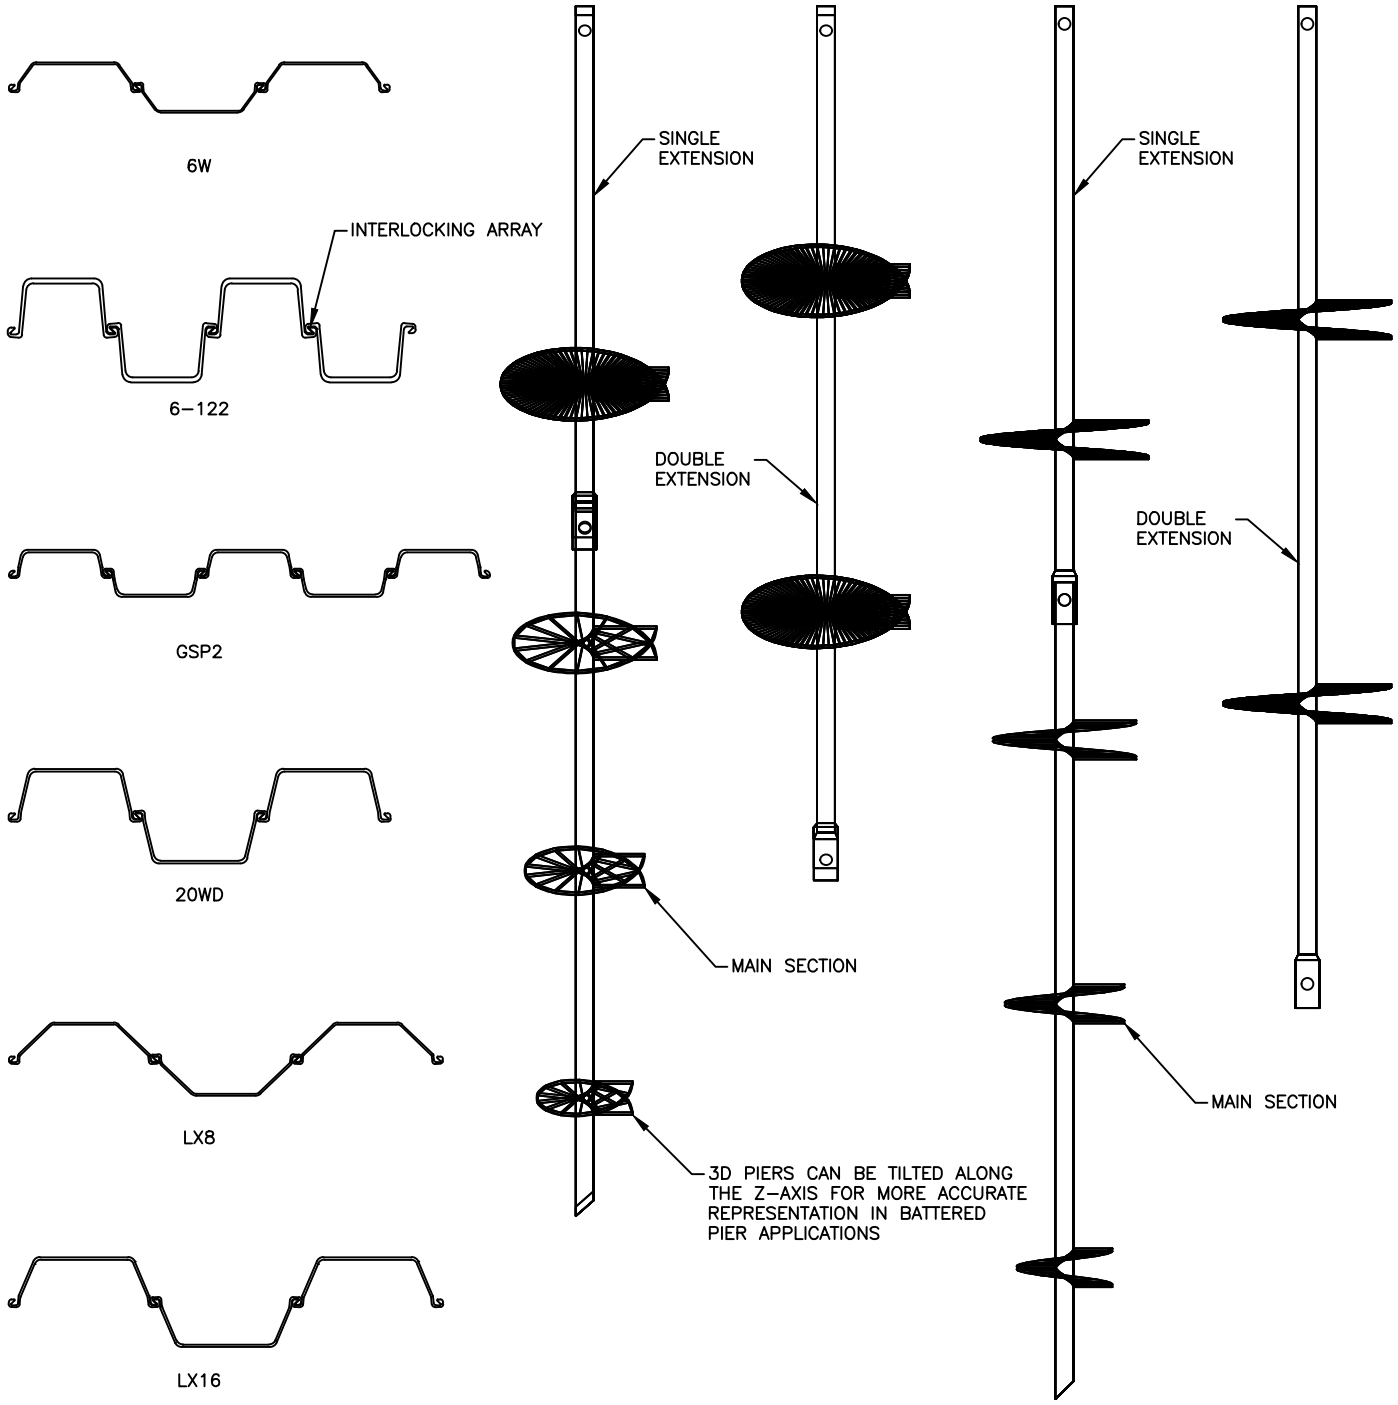

THE HELICAL PIER BLOCKS PROVIDED REPRESENT A COMPOSITE OF THE MANY TYPES AVAILABLE. THE SHEET PILING PROFILES CORRESPOND TO ASTM. THE ACTUAL PHYSICAL CHARACTERISTICS OF THE ITEMS CAN BE MANIPULATED TO THE COMPANY'S PREFERENCE AND AS LONG AS THE DYNAMICS ARE NOT DISRUPTED THE ITEMS WILL PERFORM THE SAME. ACTUAL CONCRETE CAP SIZES MAY VARY GREATLY WITH DESIGN CONDITIONS.

SOME SCM BLOCKS WERE CREATED NOT TO BE EXPLODED. THIS CAN BE ALTERED BY OPENING THE BLOCK IN THE BLOCK EDITOR AND CHANGING THE SETTING, EITHER IN THAT PARTICULAR DRAWING OR IN THE LIBRARY DIRECTORY.

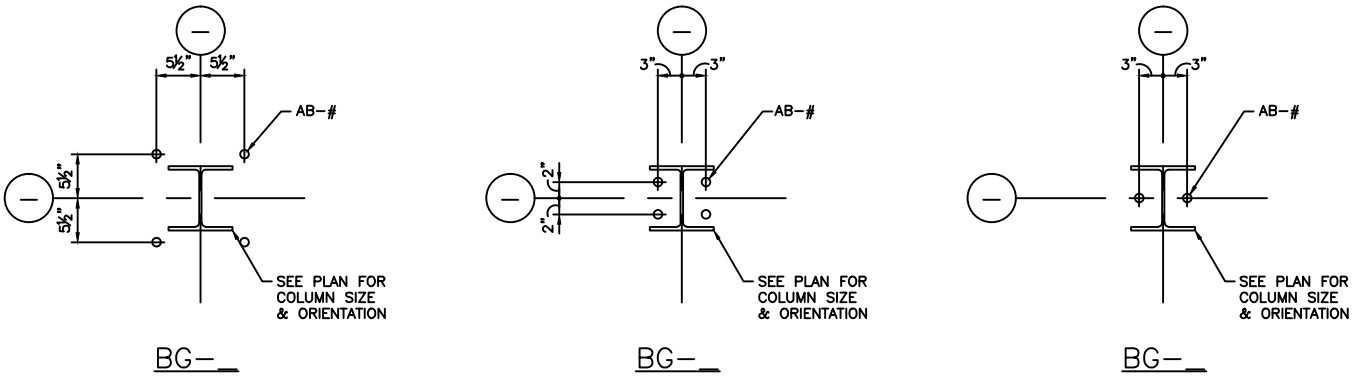

THE BOLT GAGE BLOCK WAS AN EXERCISE TO DIVIDE INFORMATION REQUIRED BY THE CONCRETE CONTRACTOR FROM THAT REQUIRED BY THE STEEL FABRICATOR. ANCHOR BOLT BOLT GAGES WERE INTEGRATED WITH BASE PLATE DETAILS IN A WAY THAT MADE IT EASIER MATCH THE TWO EVEN WHEN THE PACKAGES WERE BID AT DIFFERENT TIMES

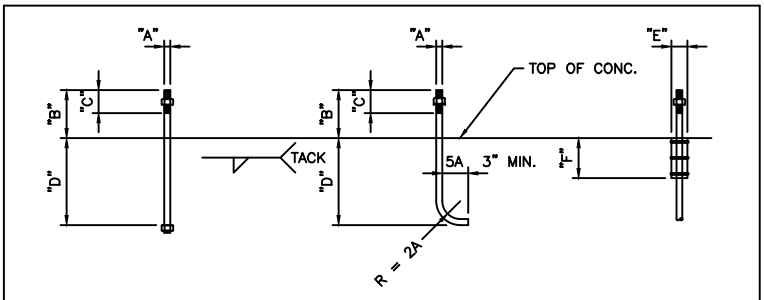

MARK	NO REQ'D	TYPE	DIM "A"	DIM "B"	DIM "C"	DIM "D"	SLEEVE		REMARKS
							DIM "E"	DIM "F"	
–	–	–	–	–	–	–	–	–	–

ALL ANCHOR BOLTS TO BE FURNISHED WITH HEAVY HEX NUTS AND HARDENED WASHER.

IT SEEMED ONLY NATURAL TO INCLUDE THE ACCOMPANYING SCHEDULE AS THE LAST VISIBILITY.

THE BOLT GAGE DETAIL PROVIDED REPRESENTS NO SPECIFIC DESIGN WHATSOEVER. IT IS ENTIRELY AN EXERCISE IN MANAGING TYPICAL DETAILS AND DOES NOT ASSUME ANY DESIGN CAPACITIES. THE ACTUAL PHYSICAL CHARACTERISTICS OF THE ITEMS CAN BE MANIPULATED TO THE COMPANY'S PREFERENCE AND AS LONG AS THE DYNAMICS ARE NOT DISRUPTED THE ITEMS WILL PERFORM THE SAME. ACTUAL DIMENSIONS AND SIZES MAY VARY GREATLY WITH DESIGN CONDITIONS.

SOME SCM BLOCKS WERE CREATED NOT TO BE EXPLODED. THIS CAN BE ALTERED BY OPENING THE BLOCK IN THE BLOCK EDITOR AND CHANGING THE SETTING, EITHER IN THAT PARTICULAR DRAWING OR IN THE LIBRARY DIRECTORY.

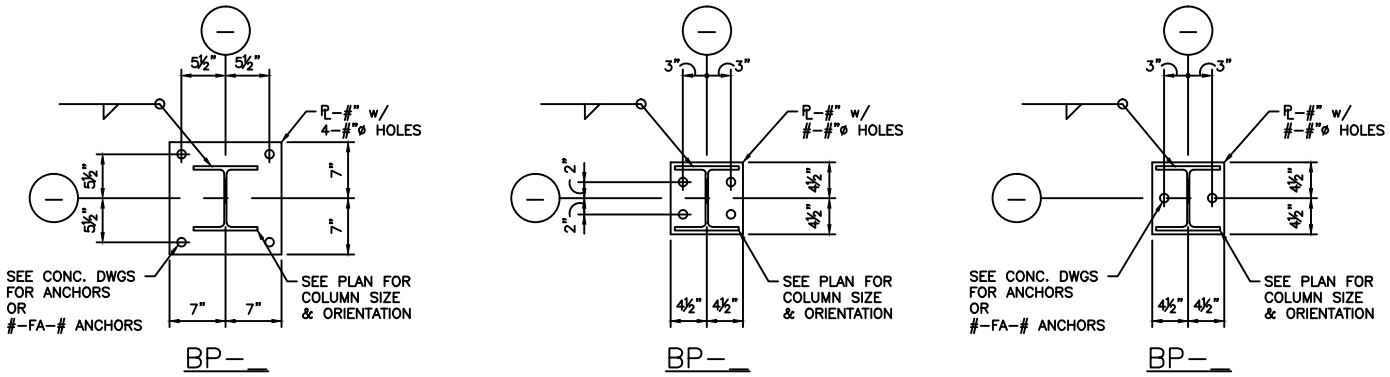

THE BASE PLATE BLOCK WAS AN EXERCISE TO DIVIDE INFORMATION REQUIRED BY THE CONCRETE CONTRACTOR FROM THAT REQUIRED BY THE STEEL FABRICATOR. ANCHOR BOLT BOLT GAGES WERE INTEGRATED WITH BASE PLATE DETAILS IN A WAY THAT MADE IT EASIER MATCH THE TWO EVEN WHEN THE PACKAGES WERE BID AT DIFFERENT TIMES

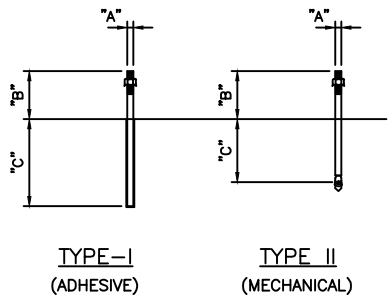

MARK	NO REQ'D	DIM "A"	DIM "B"	DIM "C"	REMARKS
–	–	–	–	–	–

SEE GENERAL NOTES FOR ANCHOR SPECIFICATIONS.

IT SEEMED ONLY NATURAL TO INCLUDE THE ACCOMPANYING SCHEDULE AS THE LAST VISIBILITY.

THE BASE PLATE DETAIL PROVIDED REPRESENTS NO SPECIFIC DESIGN WHATSOEVER. IT IS ENTIRELY AN EXERCISE IN MANAGING TYPICAL DETAILS AND DOES NOT ASSUME ANY DESIGN CAPACITIES. THE ACTUAL PHYSICAL CHARACTERISTICS OF THE ITEMS CAN BE MANIPULATED TO THE COMPANY'S PREFERENCE AND AS LONG AS THE DYNAMICS ARE NOT DISRUPTED THE ITEMS WILL PERFORM THE SAME. ACTUAL DIMENSIONS AND SIZES MAY VARY GREATLY WITH DESIGN CONDITIONS.

SOME SCM BLOCKS WERE CREATED NOT TO BE EXPLODED. THIS CAN BE ALTERED BY OPENING THE BLOCK IN THE BLOCK EDITOR AND CHANGING THE SETTING, EITHER IN THAT PARTICULAR DRAWING OR IN THE LIBRARY DIRECTORY.