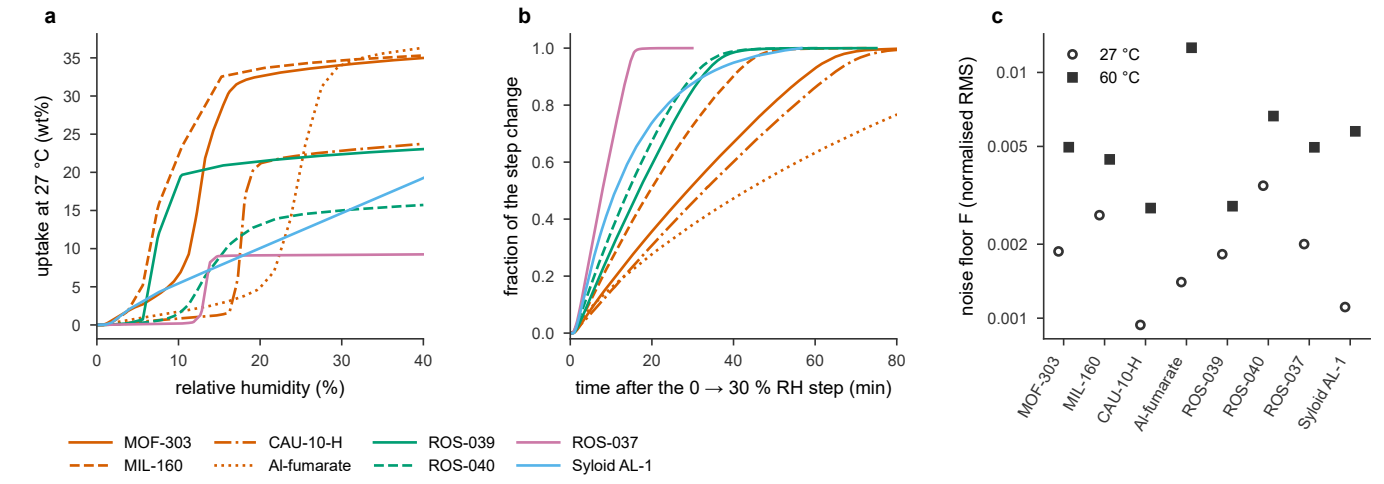
a
uptake at 27 °C (wt%)
relative humidity (%)
b
fraction of the step change
time after the 0 → 30 % RH step (min)
c
noise floor F (normalised RMS)
27 °C
60 °C
MOF-303
MIL-160
CAU-10-H
Al-fumarate
ROS-039
ROS-040
ROS-037
Syloid AL-1