


Tiba Swiss International شرکه طیبه سویس العالمیه General Trading Company

Truck Wash Station T.S.I 606



Schlösslistrasse 2, 2504 Bie/Bienne
Tel. +41763435938, +41325546095
info@tibaswiss.ch - www.tibaswiss.ch

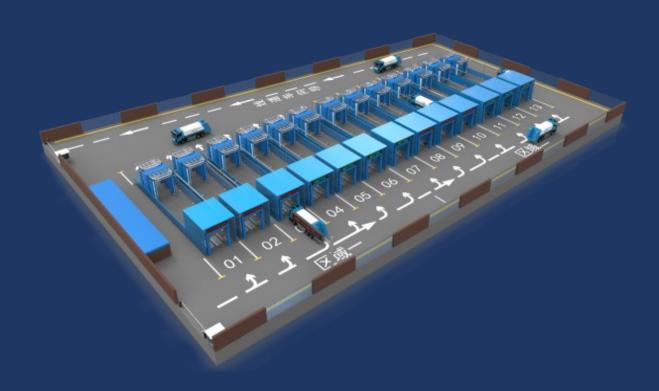


Benefits of automatic washing

- -Maintain the car
- -More clean for the clean
- -Save time only five minutes
- -Car rust prevention
- -Friendly and maintain proof of ease of payment and use
- -Laundry at any time 24/7

فوائد الغسيل الآلي

تحافظ علي السيارة نظافه اكثر للسيارة توفير الوقت فقد خمس دقائق الوقايه من الصدأ للسيارة صديقه ومحافظه علي البيئه سهوله الدفع والاستخدام الغسيل في اي وقت 24h/7

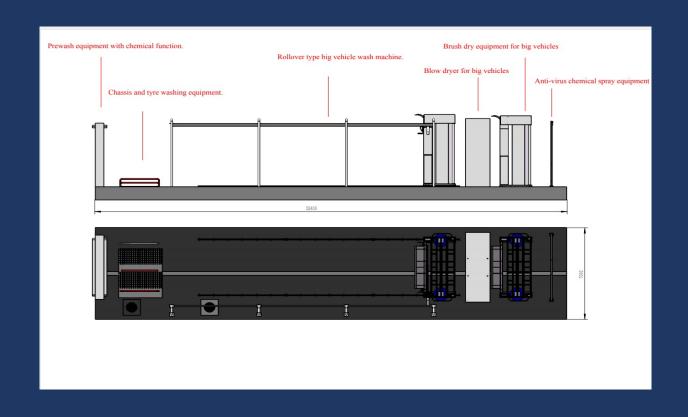

Technical Data

معلومات عن T.S.I 606

No.	Function Descriptions	Brand Details	Remarks
(1) (2) (3) (4) (5)	Our garbage truck washing machines can also wash buses and trucks Based on original T.S.I -305 We Remain the side brushes to wash the truck sides Delete top brush, PROFILED wash the front and rear of the garbage truck with high-pressure water. Intelligent chemical mixing system. Innovative suspension system non-resistance rails Unique embedded fast drying system Digital voice security alarm system Faulty self-checking system One key anti-frozen systemWash speed, Power consumption, chemicals consumption, water consumptionMachine	2.4 Drive through type prewash equipment for big vehicles 2.5 Heavy duty vhiecle chassis & tyre washing equipment 2.6 Rollover type big vehicle automatic washing machine 2.7 BRUSH DRY EQUIPMENT FOR BUS AND TRUCK 2.8 Drive through type anti-virus chemical spraying equipment 2.9 special packing charges, installation allowance 2.10 the Bus Washing Machine T.S.I 305 and 307. Dimensions: INSTALLATION SPACE SUPPLY STATION Main power, Total power Water pressure, Air supply Vehicle type, Wash size 37x3x3 meter	Germany pinfl Japan NSK Germany PEPPERL+FUCHS France schneider Taiwan Delta Taiwan Delta Germany PEPPERL+FUCHS 70x60 Meter 1 truck/5 minutes about 850LMinute 75kw/h
(7)	Flushing pressure: 3-4kg/cm² Cleaning range: vehicle chassis, wheels and hubs When the vehicle passes through	Excellent than the requirements of 3kg/cm² in the bidding documents Automatically and munually	The total motor power is 6 fans * 5.5, each with a total of 33KW.


the equipment for 1 minute, the air-drying rate is ≥90%Drive-through. Start mode: automatic photoelectric induction start

Two groups of brushes (nylon filament brushes)

groups of side brushes Travelling rollover (brush wash, touchless wash)

2.using the top drying + side drying method; Air pressure 0.7Mpa

Truck Wash Station T.S.I 606

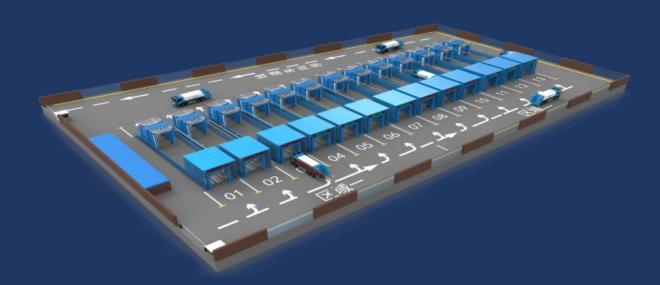

Tiba Swiss International T.S.I General Trading Company

شركه طيبه سويس العالميه للتجاره العامه والمقاولات

Schlösslistrasse 2, 2504 Bie/Bienne
Tel. +41763435938, +41325546095
info@tibaswiss.ch - www.tibaswiss.ch

