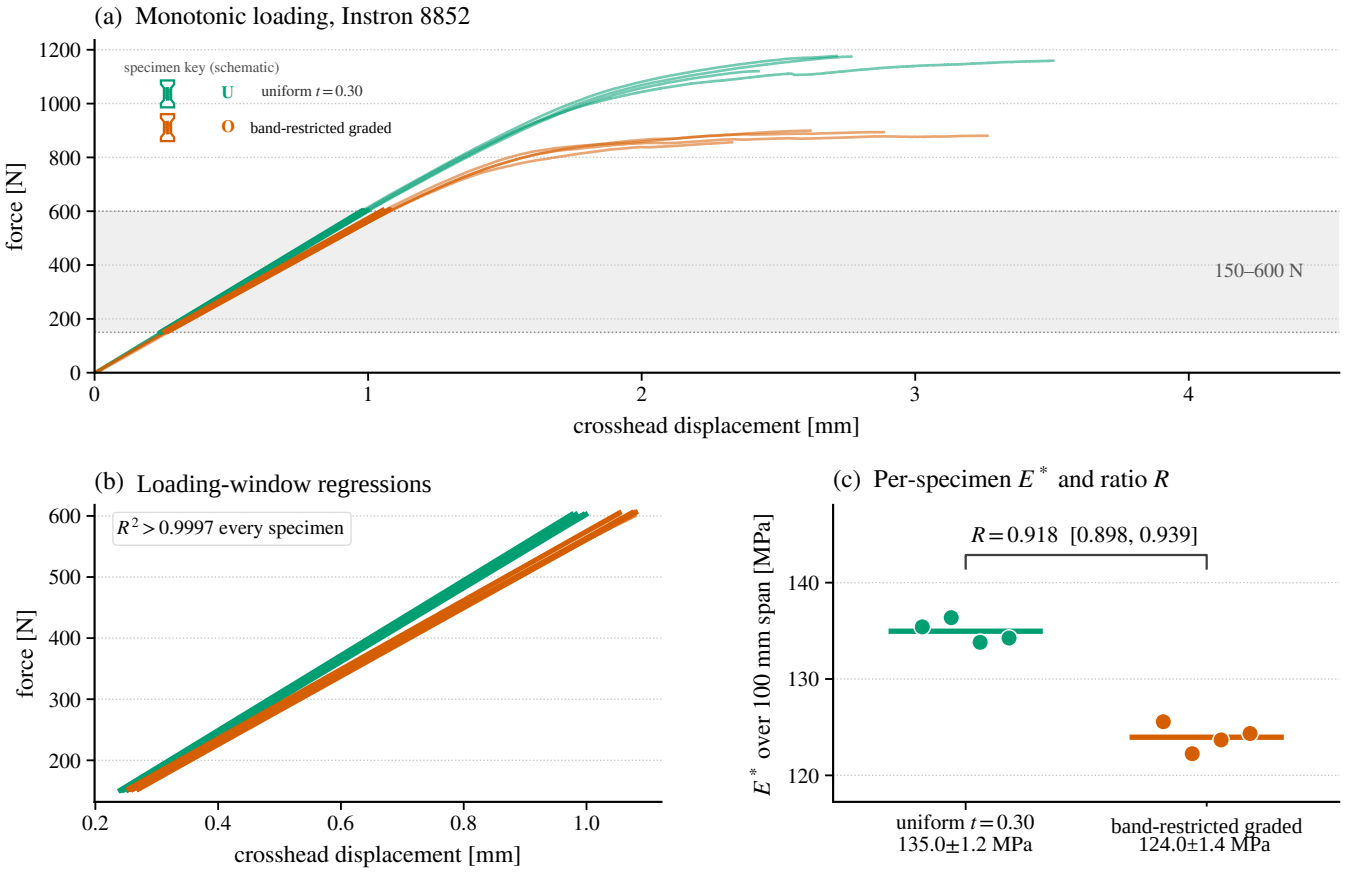

(a) Monotonic loading, Instron 8852
specimen key (schematic)
U uniform $t = 0.30$
O band-restricted graded
force [N]
crosshead displacement [mm]
150–600 N
(b) Loading-window regressions
$R^2 > 0.9997$ every specimen
force [N]
crosshead displacement [mm]
(c) Per-specimen E^* and ratio R
$R = 0.918$ [0.898, 0.939]
E^* over 100 mm span [MPa]
uniform $t = 0.30$
135.0±1.2 MPa
band-restricted graded
124.0±1.4 MPa