




PRODUCT CATALOGUE



SCAN ME!



LIMITED EDITION VINYL LAMINATES (Smart Series)



SUPER WHITE



FROST PREMIUM



FROST



ALMAS




GRANULAR




AXIS



AL-ISLAM

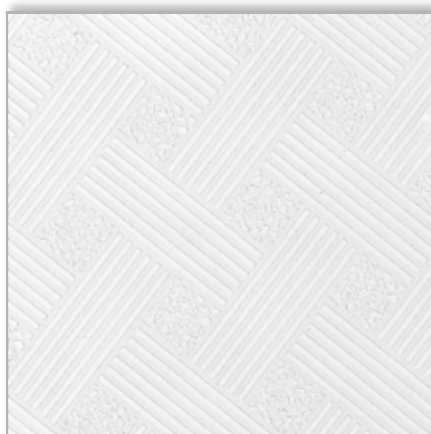

BAMBOO

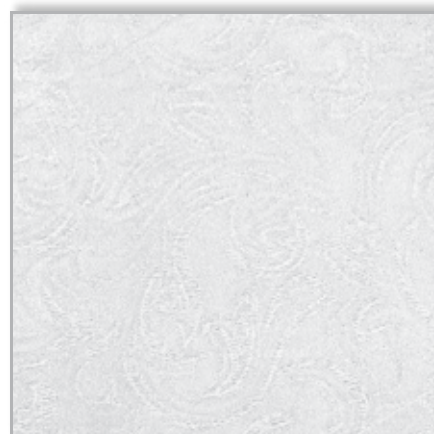


FLORA


LIMITED EDITION VINYL LAMINATES (Smart Series)



ELEFOIL

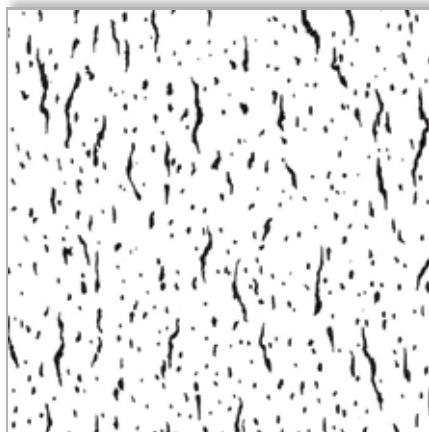

FISSURED

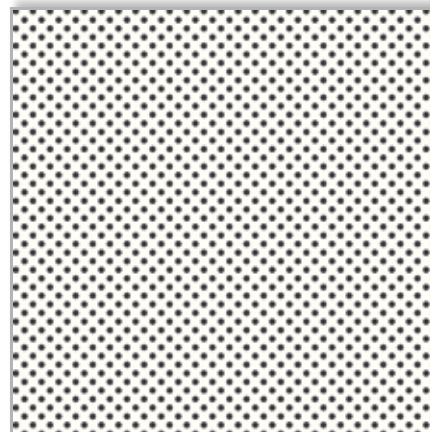

PINHOLE



TEAK



WALNUT



SEA SAND



ASH WHITE




LINK



LINK GOLD


LIMITED EDITION VINYL LAMINATES (Smart Series)

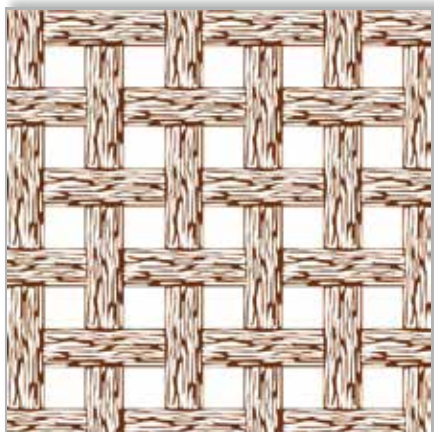


KNIT




AXIS GOLD

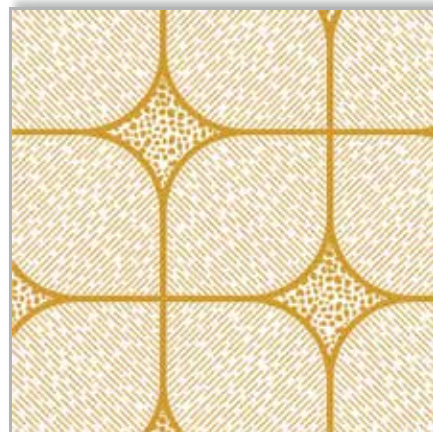

ALMAS GOLD

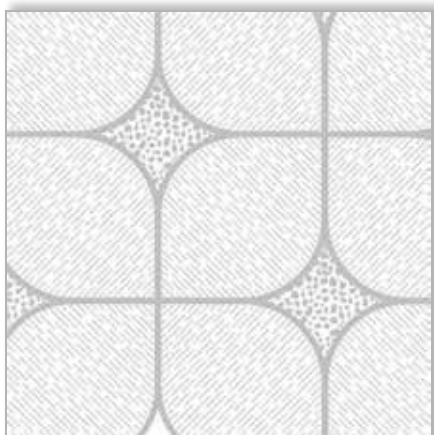

ALMAS SILVER

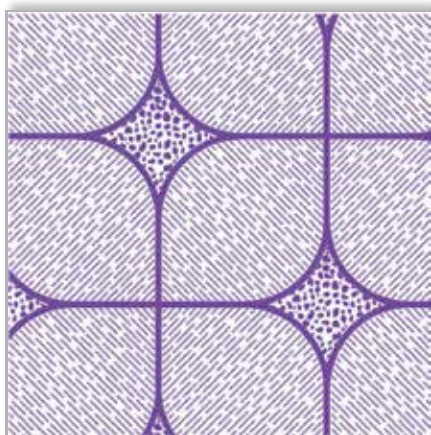


ALMAS PURPLE




PALM GOLD



PALM SILVER

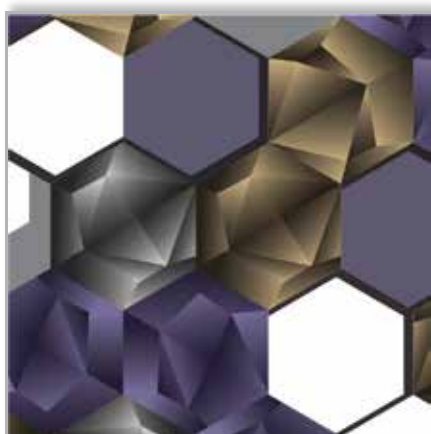

DIAMOND

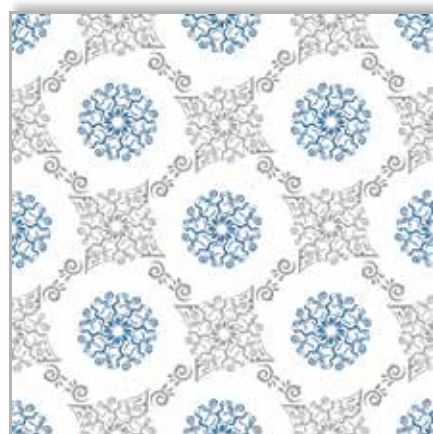


UG-01

DESIGN PATTERNS OF SMART TILES (UG Series)



UG-01-2

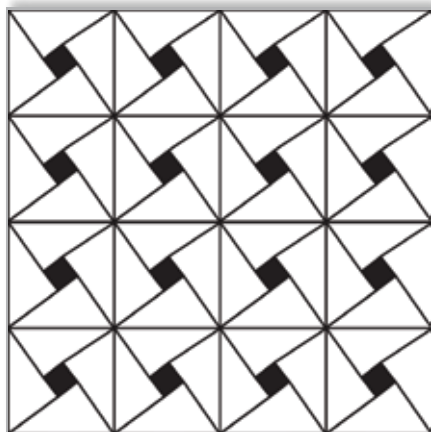

UG-02



UG-03



UG-03-2




UG-04



UG-04-2



UG-05

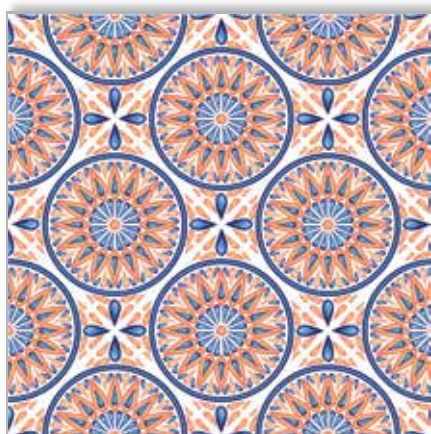

UG-06



UG-07

DESIGN PATTERNS OF SMART TILES (UG Series)



UG-08



UG-09



UG-10



UG-10-2



UG-12




UG-13



UG-14



UG-15

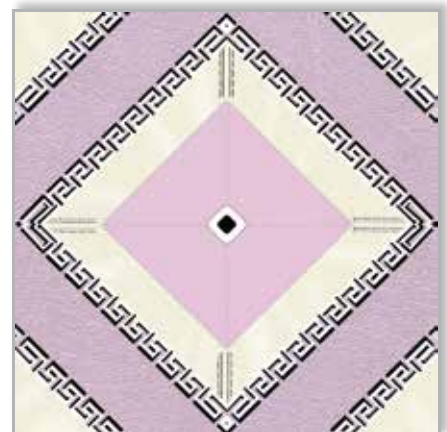

UG-16-3

DESIGN PATTERNS OF SMART TILES (UG Series)



UG-17



UG-19



UG-20



UG-21



UG-21-2



UG-22



UG-23



UG-24



UG-25

DESIGN PATTERNS OF SMART TILES (UG Series)



UG-26



UG-27



UG-27-2



UG-28



UG-28-2



UG-30



UG-31



UG-31-2



UG-34

DESIGN PATTERNS OF SMART TILES (UG Series)



UG-36



UG-37



UG-37-2



UG-38



UG-38-2



UG-38-3



UG-39



UG-40



UG-40-2



UG-40-3

DESIGN PATTERNS OF SMART TILES (UG Series)



UG-41



UG-42



UG-43



UG-44




UG-45



UG-46



UG-47-2

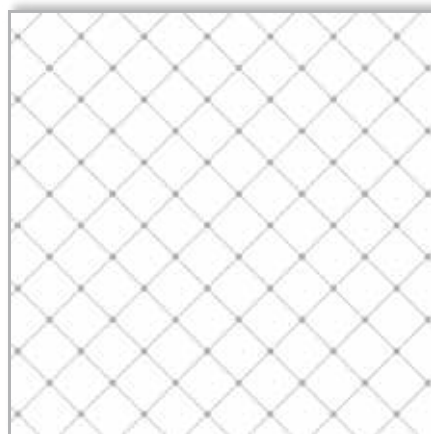

UG-49



UG-50

DESIGN PATTERNS OF SMART TILES (UG Series)



UG-51



UG-54



UG-54-2




UG-55




UG-55-2



UG-56

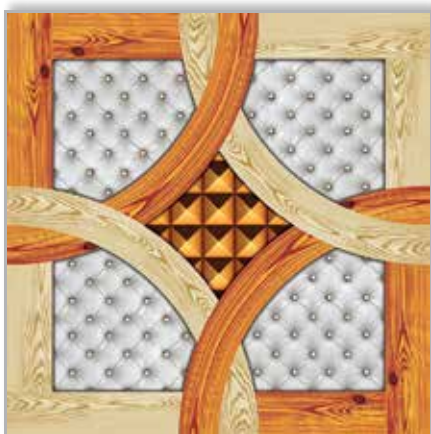

UG-57

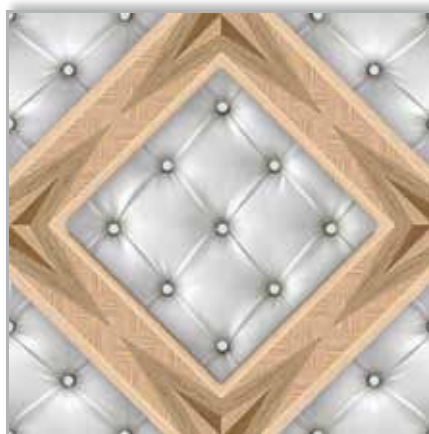

UG-58



UG-59

DESIGN PATTERNS OF SMART TILES (UG Series)



UG-60




UG-61



UG-62



UG-63

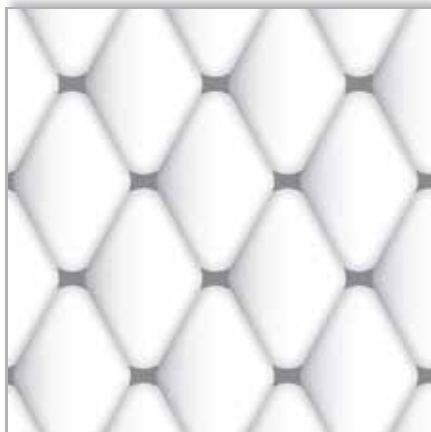


UG-64



UG-65



UG-66

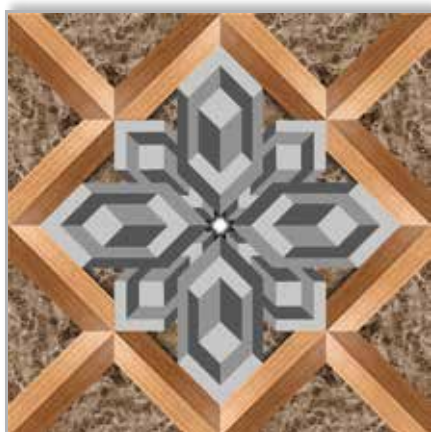

UG-67



UG-68

DESIGN PATTERNS OF SMART TILES (UG Series)



UG-69



UG-70



UG-71



UG-72



UG-73



UG-74



UG-75



UG-76




UG-77


DESIGN PATTERNS OF SMART TILES (UG Series)



UG-78

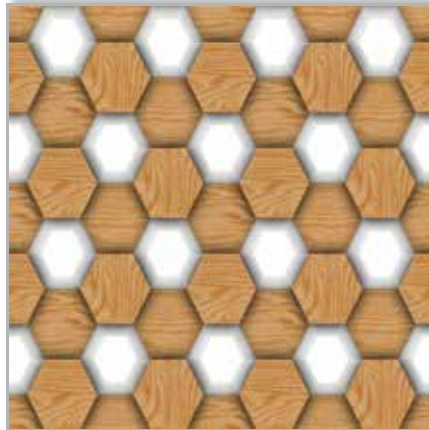

UG-79

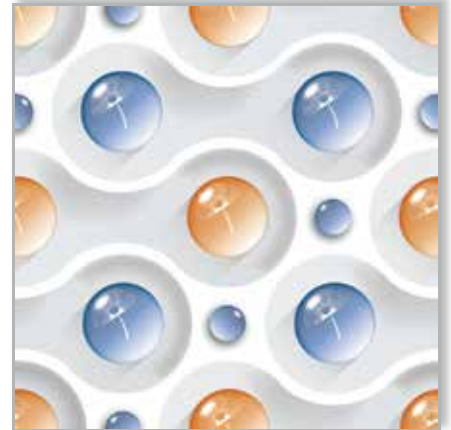


UG-80




UG-81




UG-82

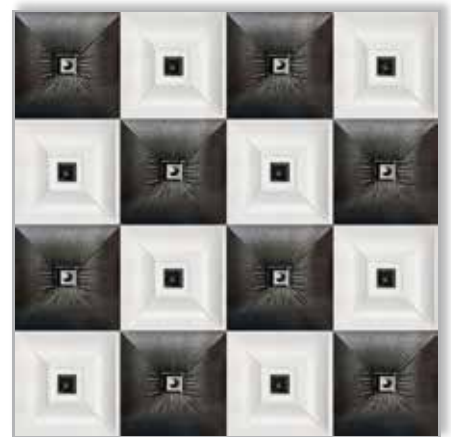

UG-83

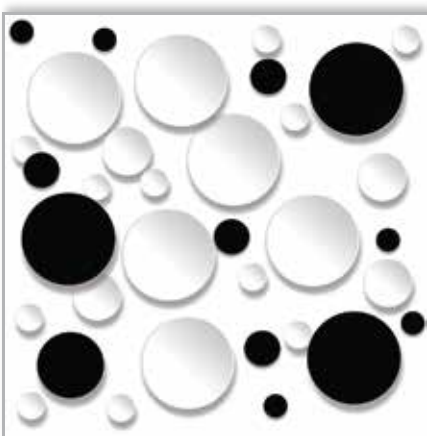

UG-84

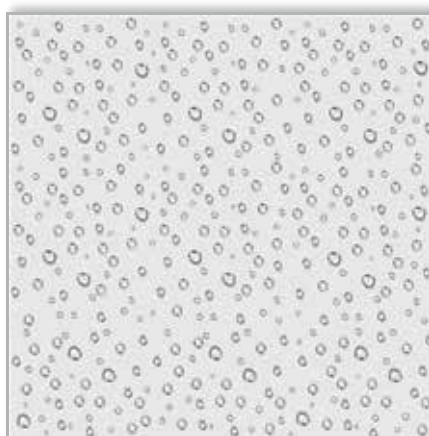

UG-85



UG-86

DESIGN PATTERNS OF SMART TILES (UG Series)



UG-87



UG-87-2



UG-87-3




UG-88



UG-89



UG-89-2

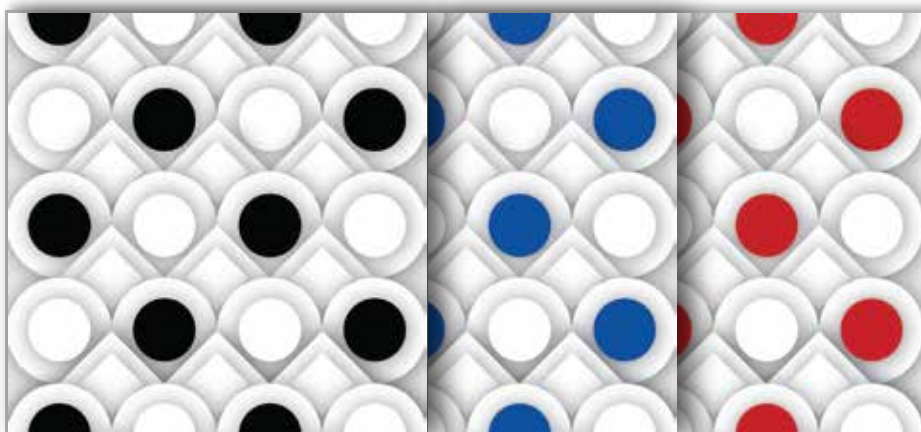

UG-90

UG-90-2

UG-90-3




FOIL




FRONT VINYL LAMINATED AND PAPER BACKING

Smart Tile offers premium Vinyl Laminates in a variety of embossed, plain, and printed patterns, providing the flexibility to seamlessly match or contrast with the decorative layout of the surrounding area. The vinyl surface is easy to clean, reflects ample light, and requires no additional ornamentation.



FRONT VINYL LAMINATED AND ALUMINIUM FOIL BACKING

Adding to its features, Smart Tile back-liners are affixed to a distinctive aluminum foil. This foil serves as an effective barrier against heat transfer, acts as a reliable vapor retarder, and efficiently reflects 95% of the thermal radiation. This makes it particularly suitable for application on the top-floors of both commercial and residential buildings that are significantly impacted by heat and sunlight.

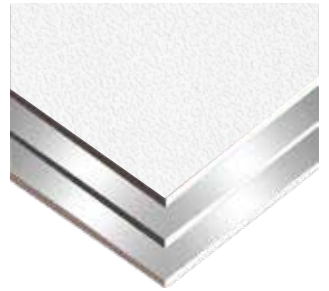

PRODUCT SPECIFICATION

PARAMETERS	RESULTS
Thermal Conductivity	0.0798 W/mK
Flame Resistance	Pass - Non-Combustibility (Thermal Decomposition $\leq$ 50% @750°C x 1 hour)

STANDARDS FOLLOWED: ASTM - E136, C1396

THICKNESS (MM)	IMPERIAL SIZE (MM)	PACKING
7	603 x 603	10 pcs / CTN
8	603 x 603	8 pcs / CTN
9	603 x 603	8 pcs / CTN
9	603 x 1206	6 pcs / CTN
12	603 x 603	6 pcs / CTN
12	603 x 1206	4 pcs / CTN
15	603 x 603	4 pcs / CTN


STANDARD

The **SMART Standard Gypsum Board** primarily comprises of gypsum and contains an incombustible core covered with extra tough paper on both sides, providing it with strength and durability. The manufacturing of SMART Gypsum Board complies with standards **C471, C472, C473 and C1396**. Its development, meticulously executed through precision engineering with the use of the highest quality materials, guarantees its status as a product of utmost quality assurance.

Your Perfect Solution for Wall Partitions & Decorative Ceilings at Home and Work Spaces.

PRODUCT SPECIFICATIONS

Thickness	Metric Size (mm)	Imperial Size (mm)	Weight (approx.) kg/sheet
9 mm	1200x1800	1220x1830	14
12 mm	1200x1800	1220x1830	19
9 mm	1200x2400	1220x2440	19
12 mm	1200x2400	1220x2440	25
15 mm	1200x2400	1220x2440	30

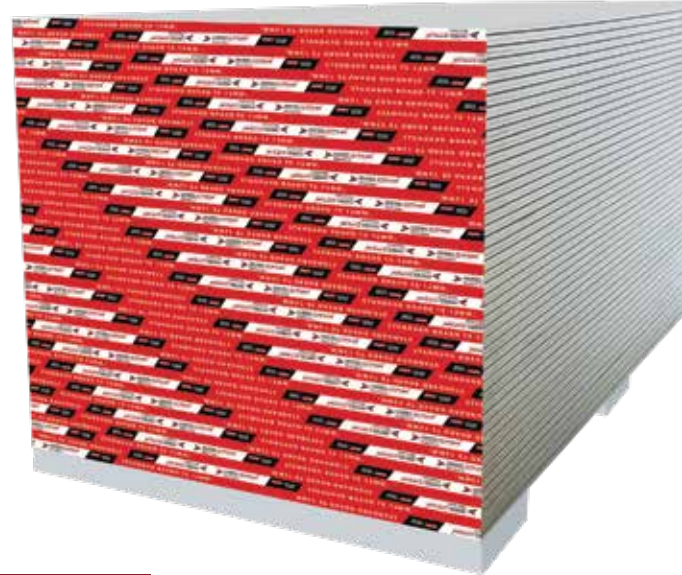

Square Edge (S.E)



Tapered Edge (T.E)




FEATURES

- Convenient and Lightweight
- Quick and Efficient Wall Renovation
- Immaculate and Flawless Surface
- Effortless Setup of Plumbing and Electrical Circuitry
- Low Thermal Conductivity and Fire Resistant

HEAT RESISTANT

SMART Heat Resistant Gypsum Board offers effective interior heat insulation for exterior walls and top-floor ceilings of both commercial and residential buildings that are significantly impacted by heat and sunlight. Beneficial in both hot and cold climates, the board's back liner, attached to a specialized aluminum foil, reflects 95% of thermal radiation, ensuring a comfortable temperature. It also acts as a reliable vapor retarder and prevents moisture penetration in walls and ceilings.

This board is preferred for areas requiring additional heat control and can be incorporated into all SMART Gypsum Boards, including Standard, Fire Resistant, and Moisture Resistant.

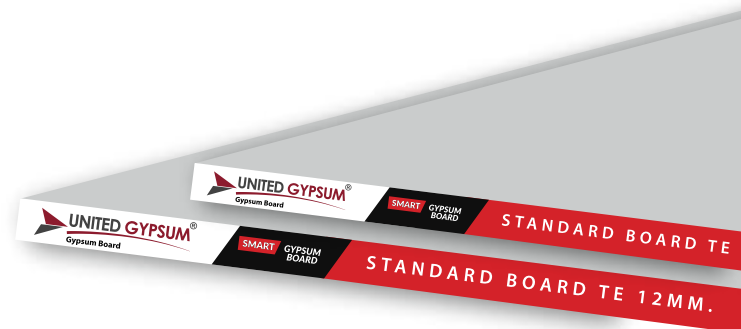

MOISTURE RESISTANT

SMART Moisture Resistant Gypsum Board is an ideal choice for walls, partitions and ceilings that need additional protection from moisture. This special board consists of a blend of wax and a silicone compound enclosed in tough green paper on the surfaces which strengthens walls, partition and ceilings to endure moisture and damp surroundings.

FEATURES

- Convenient and Lightweight
- Extra Protection From Moisture
- Low Water Absorption: Does Not Absorb More Than 5% of Water by Weight
- Comparable Performance to Standard Board for Fire Rating and Sound Insulation

PRODUCT SPECIFICATIONS

Thickness	Metric Size (mm)	Imperial Size (mm)	Weight (approx.) kg/sheet
12 mm	1200x1800	1220x1830	20
12 mm	1200x2400	1220x2440	25
15 mm	1200x2400	1220x2440	32



Square Edge (S.E.)



Tapered Edge (T.E.)



FIRE RESISTANT

SMART Fire Resistant Gypsum Board is an ideal choice for walls, partitions and ceilings that need additional protection from fire. It contains incombustible fiber added to gypsum; enclosed within a durable, cohesive, compressed pink paper that enhances its strength. This specialized board has been precisely tailored and rigorously tested to meet various fire rating requirements.

FEATURES

- Up to 60 - 180 Minutes of Fire Rating
- Restrains Combustion Until Total Calcification
- Comparable Performance to Standard Board for Sound Insulation

PRODUCT SPECIFICATIONS

Thickness	Metric Size (mm)	Imperial Size (mm)	Weight (approx.) kg/sheet
12 mm	1200x1800	1220x1830	24
12 mm	1200x2400	1220x2440	30
15 mm	1200x2400	1220x2440	35



Square Edge (S.E.)



Tapered Edge (T.E.)





SMART / TAPETM

SMART Tape: Self-Adhesive Fiberglass Tape

This self-adhesive fiberglass tape can be utilized to reinforce corners and drywall joints. It is made from high quality fiberglass that resists shrinkage, shredding, stretching and deformation. Additionally, it prevents joints from cracking which unfortunately occurs frequently when ordinary fiberglass mesh tape is used.



SMART / BEADTM



SMART Bead: Flexible Metal Corner Tape

Manufactured with a unique, high-quality paper tape that is laminated across two steel strips, ensuring a consistent and firm finish. The bead tape adheres easily to joint compounds, textures, and paints. It is primarily designed for reinforcing corners and achieving smooth, strong edges making it highly suitable for archways and curves.



SMART / SCREWTM

SMART Screws: Plasterboard Self Tapping Screws

Drywall screws that feature small, fine threads spanning their entire length and are designed for attaching drywall to metal studs. SMART Screws' unique bugle head enables them to penetrate the surface to the correct depth without damaging the outer paper layer.





SMART FILLERTM

A high-quality product like **SMART Gypsum Board** demands skilled jointing and a smooth finish.

SMART Filler Ready-Mixed offers a solution for achieving perfectly flush joints and a flawless finish. Elevate the quality of your workmanship with SMART Filler, the choice of professionals who demand nothing less than perfection.




SMART GRIDTM

SMART GRID Suspended Ceiling System (T-bar) is manufactured using galvanized steel coated with zinc to prevent corrosion and rusting. The underside of the bar features a thick polyester coating, enhancing its durability and robustness to withstand various climatic changes.

SMART GRID 38 | Premium

This grid system is uniquely designed with interlocked main and cross T-bars, making it an ideal choice for suspended and false ceilings in buildings, cinema halls, auditoriums, and other commercial spaces.

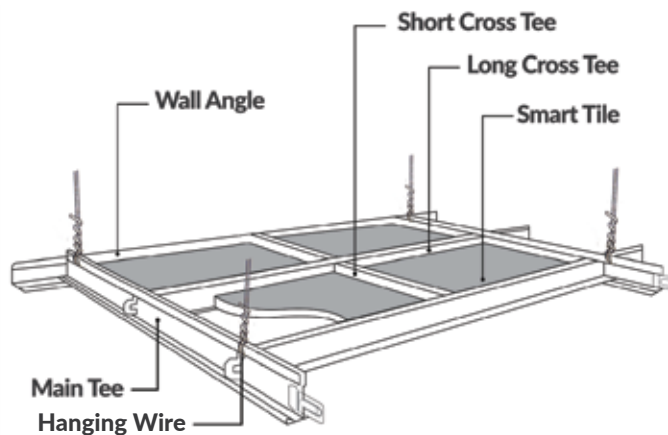


Main Runner

38mm H x 24mm W x 3660mm L,
Thickness 0.23mm




Cross Runner

26mm H x 24mm W x 1220mm L,
26mm H x 24mm W x 610mm L,
Thickness 0.23mm

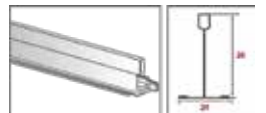

Wall Angle

22mm H x 22mm W x 3050mm L,


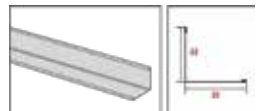


PERFORATED GYPSUM BOARD

Acoustic Board



SMART EchoShield is the ideal sound-absorbing solution for walls and ceilings, enhancing acoustics in spaces where noise reduction and aesthetics are crucial. It's perfect for music studios, home theaters, and audio-visual rooms, significantly improving sound quality. Additionally, it enhances work productivity in offices, seminar rooms, and industrial facilities by reducing noise pollution.

Furthermore, SMART EchoShield effectively tackles echoes in large, open spaces like lobbies, atriums, and auditoriums. For optimal results, utilize our complementary products: Smart Filler, Smart Tape, and Smart Bead. Importantly, avoid painting the inside of the perforated holes.

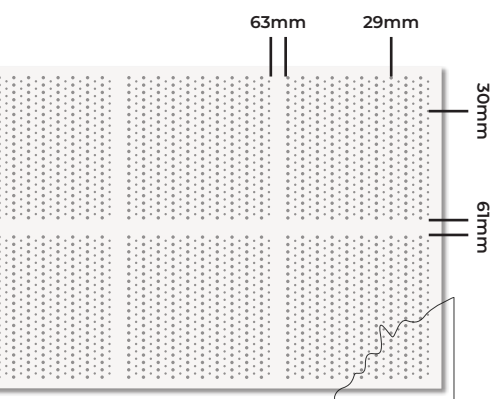



Smart EchoShield Board UGP-01

- Cross Holes
- Round Hole Shape Punching
- Hole Grid: 20 x 20 per Group
- 8 Groups per Sheet
- Diameter of Punching Hole 9/13mm
- Hole Center Distance 15/43 & 19/47mm
- Rate of Perforation: 13.4%

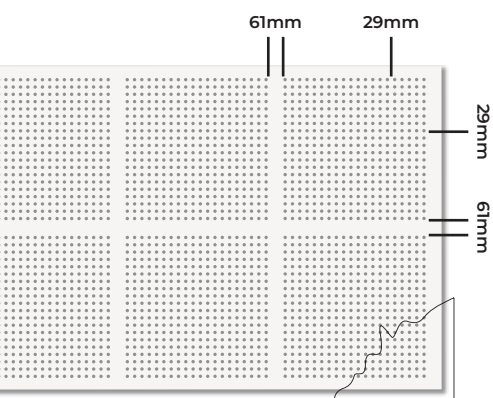

Smart EchoShield Board UGP-02

- Parallel Holes
- Round Hole Shape Punching
- Hole Grid: 20 x 20 per Group
- 8 Groups per Sheet
- Diameter of Punching Hole 13mm
- Hole Center Distance 15/43mm
- Rate of Perforation: 11.9%

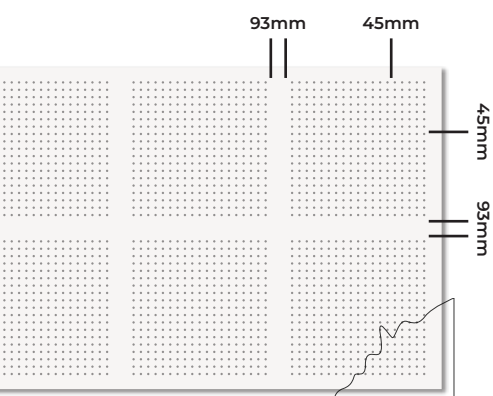


Smart EchoShield Board UGP-03

- Parallel Holes
- Round Hole Shape Punching
- Hole Grid: 19 x 19 per Group
- 8 Groups per Sheet
- Diameter of Punching Hole 9mm
- Hole Center Distance 19/47mm
- Rate of Perforation: 10.8%



PERFORATED GYPSUM TILE

Vinyl Laminated | Acoustic Ceiling Tile

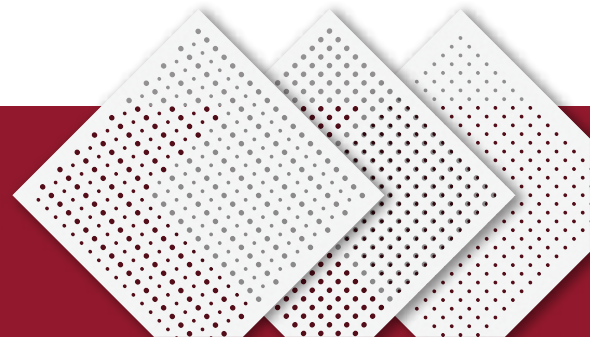



SMART EchoShield Gypsum Tile is the ideal sound-absorbing solution for ceilings, enhancing acoustics in spaces where noise reduction and aesthetics are crucial. The acoustic non-woven fabric backing also prevents dust emission. It's perfect for music studios, home theaters, and audio-visual rooms, significantly improving sound quality. Additionally, it enhances work productivity in offices, seminar rooms, and industrial facilities by reducing noise pollution.

EchoShield Gypsum Tile effectively tackles echoes in large, open spaces like lobbies, atriums, and auditoriums. For optimal results, utilize our complementary product: Smart Grid.

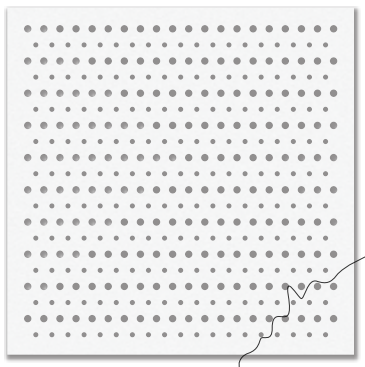



Smart EchoShield Tiles UGT-01

- Cross Holes
- Round Hole Shape Punching
- Hole Grid: 20 x 20 per group
- Diameter of Punching Hole 9/13mm
- Hole Center Distance 15/43 & 19/47mm
- Rate of Perforation: 13.4%

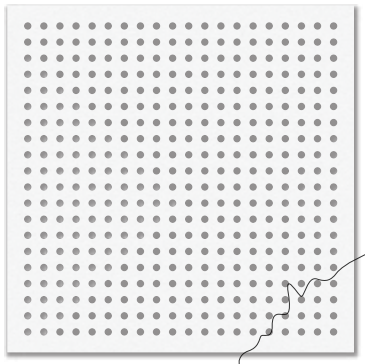

Smart EchoShield Tiles UGT-02

- Parallel Holes
- Round Hole Shape Punching
- Hole Grid: 20 x 20 per group
- Diameter of Punching Hole 13mm
- Hole Center Distance 15/43mm
- Rate of Perforation: 11.9%

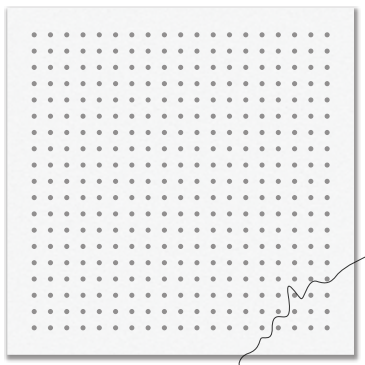

Smart EchoShield Tiles UGT-03

- Parallel Holes
- Round Hole Shape Punching
- Hole Grid: 19 x 19 per group
- Diameter of Punching Hole 9mm
- Hole Center Distance 19/47mm
- Rate of Perforation: 10.8%

USAGE AREA

Ideal for walls and ceilings, SMART EchoShield is the perfect choice for spaces where noise reduction and aesthetic appeal are essential.

ENTERTAINMENT SPACES

Music studios, home theaters, and audio-visual rooms can benefit greatly from its sound-absorbing properties.

NOISY ENVIRONMENTS

Offices, seminar rooms, factories, and industrial facilities can reduce noise pollution and foster work productivity with our SMART EchoShield Perforated Gypsum Board & Tiles.

LARGE SPACES

It is particularly effective in large, open spaces like lobbies, atrium, and auditoriums, where echoes can be a significant problem.

PLEASE NOTE

Use our Smart Filler, Smart Tape, and Smart Bead for optimal finish. Do not paint the inside of the perforated holes.

SOUND ABSORPTION RATING	Noise Reduction Coefficient (NRC) 0.65 - 0.70 When install with "Glass Wool" insulation NRC can beachieved up to 0.85
FIRE RESISTANCE	Incombustibility Grade 1

Perforated Gypsum Board

THICKNESS



9mm 12mm 15mm

*special size available
upon request

SIZE

1220 x 2440 mm

*special size available
upon request

Perforated Gypsum Tile

THICKNESS



7mm 9mm 12mm

*special size available
upon request

SIZE

603 x 603 mm

*special size available
upon request





CERTIFIED ISO 9001 : 2015 & 14001 : 2015

