



UNITED GYPSUM®
Gypsum Board

SMART GYPSUM BOARD®

STANDARD BOARD

UNITED GYPSUM®
Gypsum Board

SMART GYPSUM BOARD®

MOISTURE RESISTANT T

UNITED GYPSUM®
Gypsum Board

SMART GYPSUM BOARD®

FIRE RESISTANT TE 12MM.

UNITED GYPSUM®
Gypsum Board

SMART GYPSUM BOARD®

HEAT RESISTANT TE 12MM.

SMART GYPSUM BOARD®

The Smarter Way to Build

**Your Perfect Solution for Wall Partitions
& Decorative Ceilings at Home and Work Spaces.**



SMART TILE®
Consistency & Quality

SMART GRID™

SMART TAPE™

SMART BEAD™

SMART SCREW™

SMART ACCESS™

SMART FILLER™

SMART GYPSUM BOARD (STANDARD)

STANDARDS AND TESTS: ASTM C1396, C471, C472, C473

S/No	Parameter	Results
1	Free Water Content	0.23%
2	Weight	8.047 kg/m ²
3	Thermal Conductivity	0.0475 W/mK
4	Density	669 kg/m ³
5	Impact Resistance	0.78 J
6	Fire Resistance	Pass - Non-Combustibility (Thermally Decomposed ≤ 50% @ 750°C x 1 hour)
7	Flame Spread Classification	Flame Spread Index-0.00051 ft. min. (Without Smoke)
8	Breaking Strength Horizontal Vertical	564 N (126.9 lb F) 523 N (117.7 lb F)
9	Compressive Strength Horizontal Vertical	4.6 MPa (667 psi) 4.5 MPa (653 psi)
10	Flexural Strength Horizontal Vertical	4.95 MPa (718 psi) 4.37 MPa (634 psi)
11	Nail Pull Resistance Screw	277 N (62.3 lb F)
12	End Hardness	99.6 N (22.41 lb F)
13	Core Hardness	101 N (22.7 lb F)
14	Edge Hardness	87.3 N (19.6 lb F)



Standard



Easy
Installation



Minimal
Heat Transfer



Robust &
Durable



Environment
Friendly



STANDARD

The SMART Standard Gypsum Board is primarily composed of gypsum and contains an incombustible core covered with extra tough paper on both sides, providing it with strength and durability. The manufacturing of SMART Gypsum Board complies with standards C471, C472, C473 and C1396. Its development, meticulously executed through precision engineering with the use of the highest quality materials, guarantees its status as a product of utmost quality assurance.

FEATURES

- Convenient and Lightweight
- Quick and Efficient Wall Renovation
- Immaculate and Flawless Surface
- Effortless Setup of Plumbing and Electrical Circuitry
- Low Thermal Conductivity and Fire Resistant

PRODUCT SPECIFICATION

Thickness	Metric Size (mm)	Imperial Size (mm)	Weight (approx.) kg/sheet
7 mm	1200x2400	1220x2440	14
9 mm	1200x2400	1220x2440	19
12 mm	1200x2400	1220x2440	25
15 mm	1200x2400	1220x2440	30



SMART

GYPSUM BOARD

The Smarter Way to Build



Square Edge



Tapered Edge



HEAT RESISTANT

SMART Heat Resistant Gypsum Board offers effective interior heat insulation for exterior walls and top-floor ceilings of both commercial and residential buildings that are significantly impacted by heat and sunlight. Beneficial in both hot and cold climates, the board's back liner, attached to a specialized aluminum foil, reflects 95% of thermal radiation, ensuring a comfortable temperature. It also acts as a reliable vapor retarder and prevents moisture penetration in walls and ceilings.


This board is preferred for areas requiring additional heat control and can be incorporated into all SMART Gypsum Boards, including Standard, Fire Resistant, and Moisture Resistant.



SMART

GYPSUM BOARD

The Smarter Way to Build

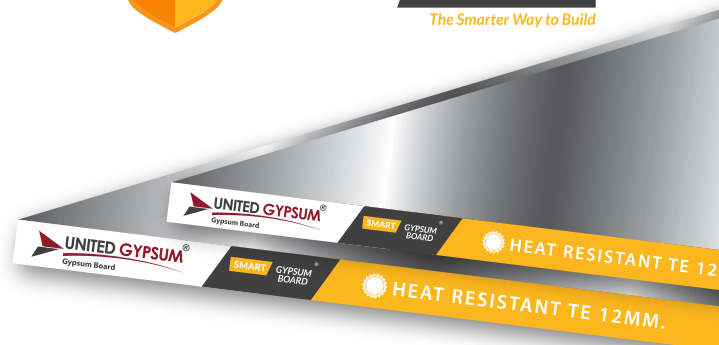

Square Edge



Tapered Edge



MOISTURE RESISTANT

SMART Moisture Resistant Gypsum Board is an ideal choice for walls, partitions and ceilings that need additional protection from moisture. This special board consists of a blend of wax and a silicone compound enclosed in tough green paper on the surfaces which strengthens walls, partitions, and ceilings to endure moisture and damp surroundings.

Standards Followed:

ASTM C 1396, C 471, C 472, C 473, EN 520, E 119

PRODUCT SPECIFICATIONS

Thickness	Metric Size (mm)	Imperial Size (mm)	Weight (approx.) kg/sheet
12 mm	1200x1800	1220x1830	20
12 mm	1200x2400	1220x2440	25
15 mm	1200x2400	1220x2440	32

Square Edge



Tapered Edge



FEATURES

- Convenient and Lightweight
- High humidity resistance, less than 5% water absorption
- Good thermal performance and non-combustible
- A consistent core to increase strength and durability
- Good acoustic performance e.g. sound protection STC 35 - 60 dB* when installed with insulation




PARAMETERS	RESULTS (12MM THICKNESS)
2 Hr Water Absorption (<5%)	2.88%
Weight	8.047 kg/m ²
Thermal Conductivity	0.0475 W/mK
Flame Spread Classification	Flame Spread Index-0.00051 ft. min. (Without Smoke)
Fire Resistance	Pass - Non-Combustibility ≤ 25% Degraded @ 750°C x 2 hour
End Hardness (≥ 49 N)	269 N
Edge Hardness (≥ 49 N)	248 N
Core Hardness (≥ 49 N)	277 N



SMART GYPSUM BOARD

The Smarter Way to Build

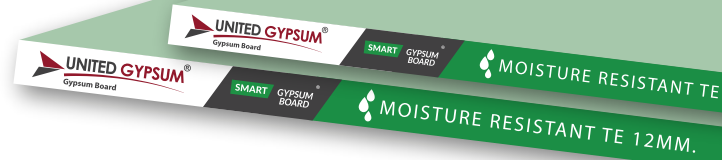

FIRE RESISTANT

SMART Fire Resistant Gypsum Board is an ideal choice for walls, partitions and ceilings that need additional protection from fire. It contains an incombustible fiber added to gypsum; enclosed within a durable, cohesive, compressed pink paper that enhances its strength. This specialized board has been precisely tailored and rigorously tested to meet various fire rating requirements.

Standards Followed:

ASTM C1396, C471, C472, C473, E 119



SMART

GYPSUM
BOARD

The Smarter Way to Build



PRODUCT SPECIFICATIONS

Thickness	Metric Size (mm)	Imperial Size (mm)	Weight (approx.) kg/sheet
12 mm	1200x1800	1220x1830	24
12 mm	1200x2400	1220x2440	30
15 mm	1200x2400	1220x2440	35

Square Edge



Tapered Edge



FEATURES

- Up to 60 - 180 Minutes of Fire Rating
- Restrains Combustion until Total Calcification
- Sound Insulation Comparable to Standard Gypsum Board

INSTALLATION

To be installed with United Gypsum concealed ceiling metal furring channels and other drywall accessories from the United Gypsum brand.



PARAMETERS	RESULTS (12MM THICKNESS)
Weight	10.02 kg/m ²
Thermal Conductivity	0.0473 W/mK
Flame Spread Classification	Flame Spread Index - 0.00017 ft. min. (without smoke)
Fire Resistance	Pass - Non-Combustibility (Decomposed ≤23% @ 750°C x 2 hours)
Acoustics	Sound Protection STC 35 - 60 dB* when installed with insulation
Fire Resistance (15mm Thickness)	Pass - Non-Combustibility (Decomposed ≤22% @ 750°C x 2.5 hours)



CERTIFIED ISO 9001 : 2015 & 14001 : 2015

