

◇ CAPSTONE II · TAIF UNIVERSITY · 2026 ◇

EQAAB

عقاب

Intelligent Autonomous Aerial Surveillance System

ENGINEERING TEAM

Abdulrahman Al-otaibi · Turki Al-otaibi Saeed Al-
harthi · Rayan Al-ghamdi Hossain Al-hubailee ·
Mohammed Al-sharif Omar Al-anzi

FACULTY SUPERVISOR

Dr. Ahmed bin Mahfoudh
College of Computers & IT
Taif University, KSA

Agenda / 24 segments

A complete walkthrough of design, build, test, and field validation of the Eqaab platform.

DURATION

~45 MIN

01 Title & Team

02 Agenda

03 Project Recap

04 Problem Statement

05 Literature & Gap

06 Objectives & KPIs

07 Real-World Use Cases

08 System Architecture

09 Hardware Stack

10 ROS 2 Software Stack

11 AI Detection Pipeline

12 IFF System

13 Backend & Comms

14 GCS Dashboard

15 Training & Dataset

16 Testing Methodology

17 Results & Performance

18 Live Demo

19 Cost Analysis

20 Objectives vs Achieved

21 Challenges & Solutions

22 Future Work

23 Conclusion

24 Q & A

Project Recap

Capstone I delivered a simulated prototype. Capstone II delivers a deployed, real-hardware system flying real missions.

PHASE SHIFT
SIM → FIELD

◇ CAPSTONE I · 2024 / 2025

Concept & Simulation

- 1 **Gazebo simulation**
Virtual drone, autonomous waypoint flight in SITL
- 2 **Basic YOLO prototype**
Off-the-shelf detection on recorded footage
- 3 **System design on paper**
Block diagrams, sensor selection, requirements
- 4 **No physical hardware**
No flight, no live communication, no real model

• CAPSTONE II · 2025 / 2026

Built. Trained. Flying.

- **Real assembled drone**
Carbon-fiber airframe, Pixhawk + RPi5 + Pi Cam
- **Full ROS 2 software stack**
Mission FSM, detection, IFF, alert publisher
- **Trained YOLOv8 model**
Custom dataset, 94.3% mAP@50, 8.3 FPS edge
- **Deployed cloud backend**
FastAPI + PostgreSQL + WSS over 4G LTE
- **Live GCS dashboard**
React + Leaflet, real-time alerts & commands

The Problem

Today's wide-area surveillance is built on fixed sensors and tired human operators — both fail exactly when threats become unconventional.

FAILURE MODES
4 IDENTIFIED

01 Fixed-camera blind spots

Static CCTV cannot cover wide, irregular terrain — borders, holy-site perimeters, remote infrastructure. Every fixed installation creates predictable, exploitable gaps in coverage.

02 Operator fatigue

Human watch-standers monitoring dozens of feeds miss critical events as attention degrades over hours. Vigilance decrements are well-documented and unavoidable.

03 Radar can't see small UAVs

Traditional radar is tuned for large aircraft. Small, low-altitude drones present a radar cross-section close to noise — they pass under conventional air defense entirely undetected.

04 Piloted UAVs replicate the fatigue problem

Existing deployed UAV solutions require dedicated human pilots per airframe — recreating the same fatigue and scaling bottleneck the system was meant to eliminate.

Literature Review

Each related work covers a slice. None integrate detection, autonomy, GPS-tagged alerts, IFF, and a live operator interface into one cohesive system.

STUDIES REVIEWED
5 + 1

REFERENCE	VEHICLES	HUMANS	DRONES	AUTONOMOUS	GPS	GCS UI	IFF
Yun et al. — Multi-UAV RL	—	—	—	✓	✓	—	—
Guettala et al. — Thermal human detection	—	✓	—	—	—	—	—
Yasmine et al. — Anti-drone YOLOv7	—	—	✓	—	—	—	—
Aydin & Singha — Drone detection YOLOv5	—	—	✓	—	—	—	—
Ghazlane et al. — YOLOv7 + DeepSort	✓	✓	—	—	—	—	—
EQAAB (this work)	✓	✓	✓	✓	✓	✓	✓

Research gap: no published work delivers an end-to-end autonomous surveillance UAV with multi-class onboard detection, IFF classification, and an operator-facing GCS — all on commodity hardware.

Objectives & KPIs

Five measurable goals, each tied to a verifiable performance indicator and an evidence source.

KPIS
5 / 5


01	Autonomous mission execution	A complete flight loop — takeoff, waypoint traversal, observation, and return-to-home — executed end-to-end with zero operator input .	FSM · WAYPOINTS · RTH
02	Onboard real-time detection	Sustained inference at ≥ 5 FPS on the edge device with no cloud round-trip. Detection latency must stay bounded even under thermal load over a full mission.	RPI5 · YOLOV8N
03	IFF classification	Every drone-class detection routed through a deterministic Friendly-vs-Unknown decision with fail-safe defaults toward UNKNOWN on any uncertainty.	REGISTRY · LOOKUP
04	GPS-tagged alerts over 4G LTE	Detection → alert → GCS render in under 3 seconds , end-to-end, including network hops. Payload is structured JSON over WSS — no video streaming.	WSS · JSON · TLS
05	Live GCS dashboard	A single operator pane with live map, telemetry, alert feed, and commands — updating in real time as the drone flies and detects.	REACT · LEAFLET

Real-World Use Cases

Three deployment scenarios that drove the requirements — and that the platform is built to serve from day one.

MISSION TYPES


3 PRIMARY

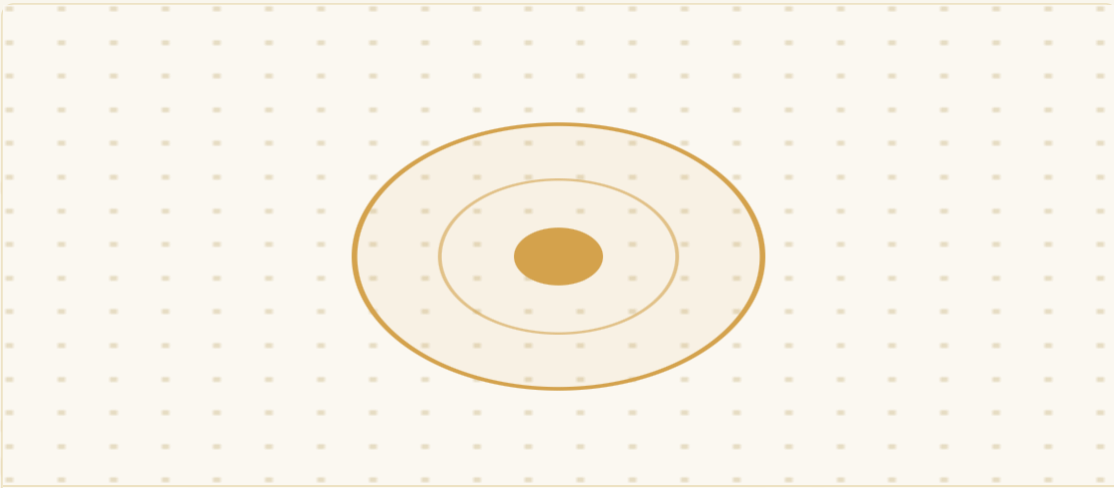

Scenario 01

Hajj Season Security


Aerial oversight of dense pilgrim crowds and unauthorized drone activity around Makkah and the holy sites — coverage no fixed sensor array can match.

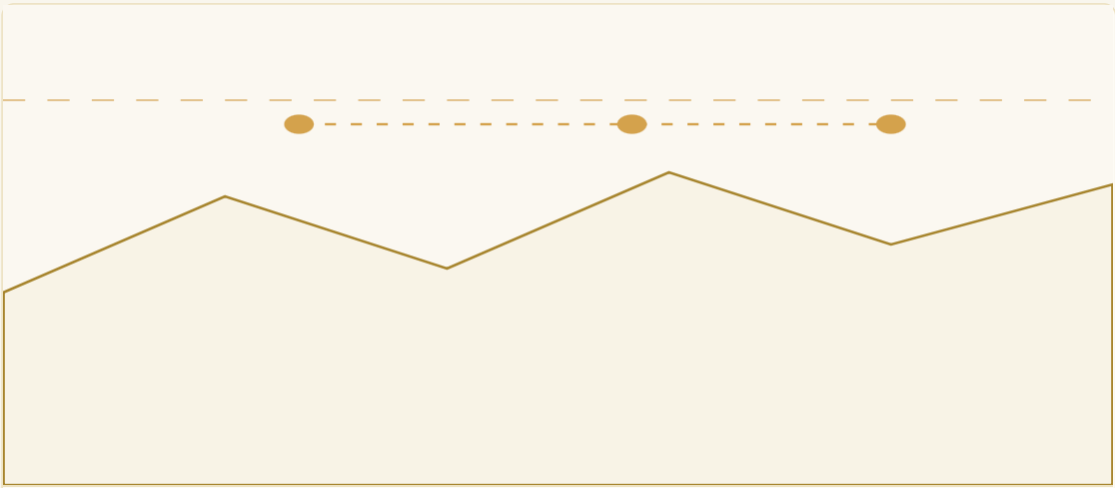

Scenario 02

Border Surveillance

Wide-area perimeter patrol across remote terrain where fixed cameras and radar coverage are economically and operationally infeasible.

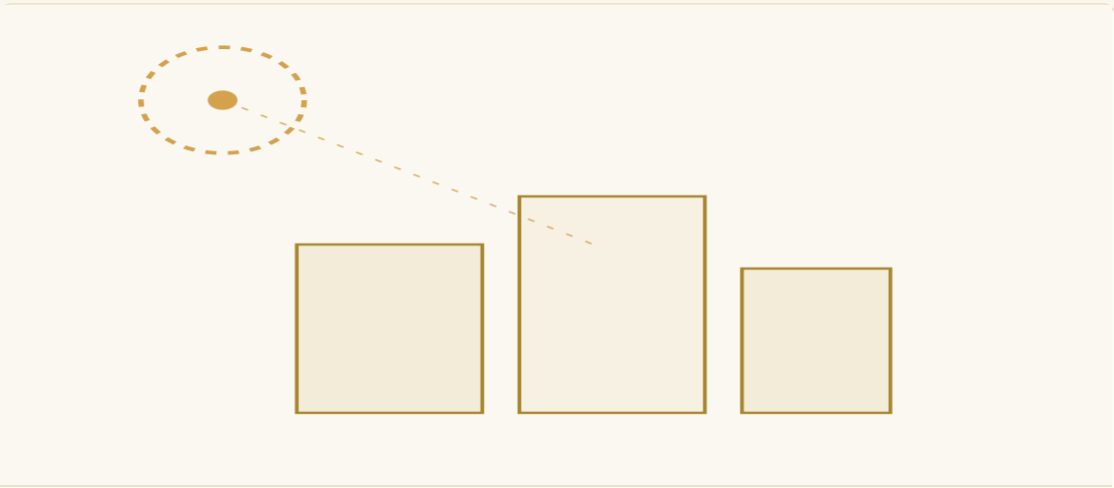

Scenario 03

Critical Infrastructure

Persistent surveillance over power plants, airports, refineries, and restricted facilities — including detection of small unauthorized UAVs entering protected airspace.

System Architecture


Three tiers — drone edge, cloud backend, operator interface — connected over 4G LTE with structured JSON only.

TIER S
3 LAYERS

DRONE EDGE · ONBOARD

CLOUD BACKEND · REGIONAL

GCS · OPERATOR

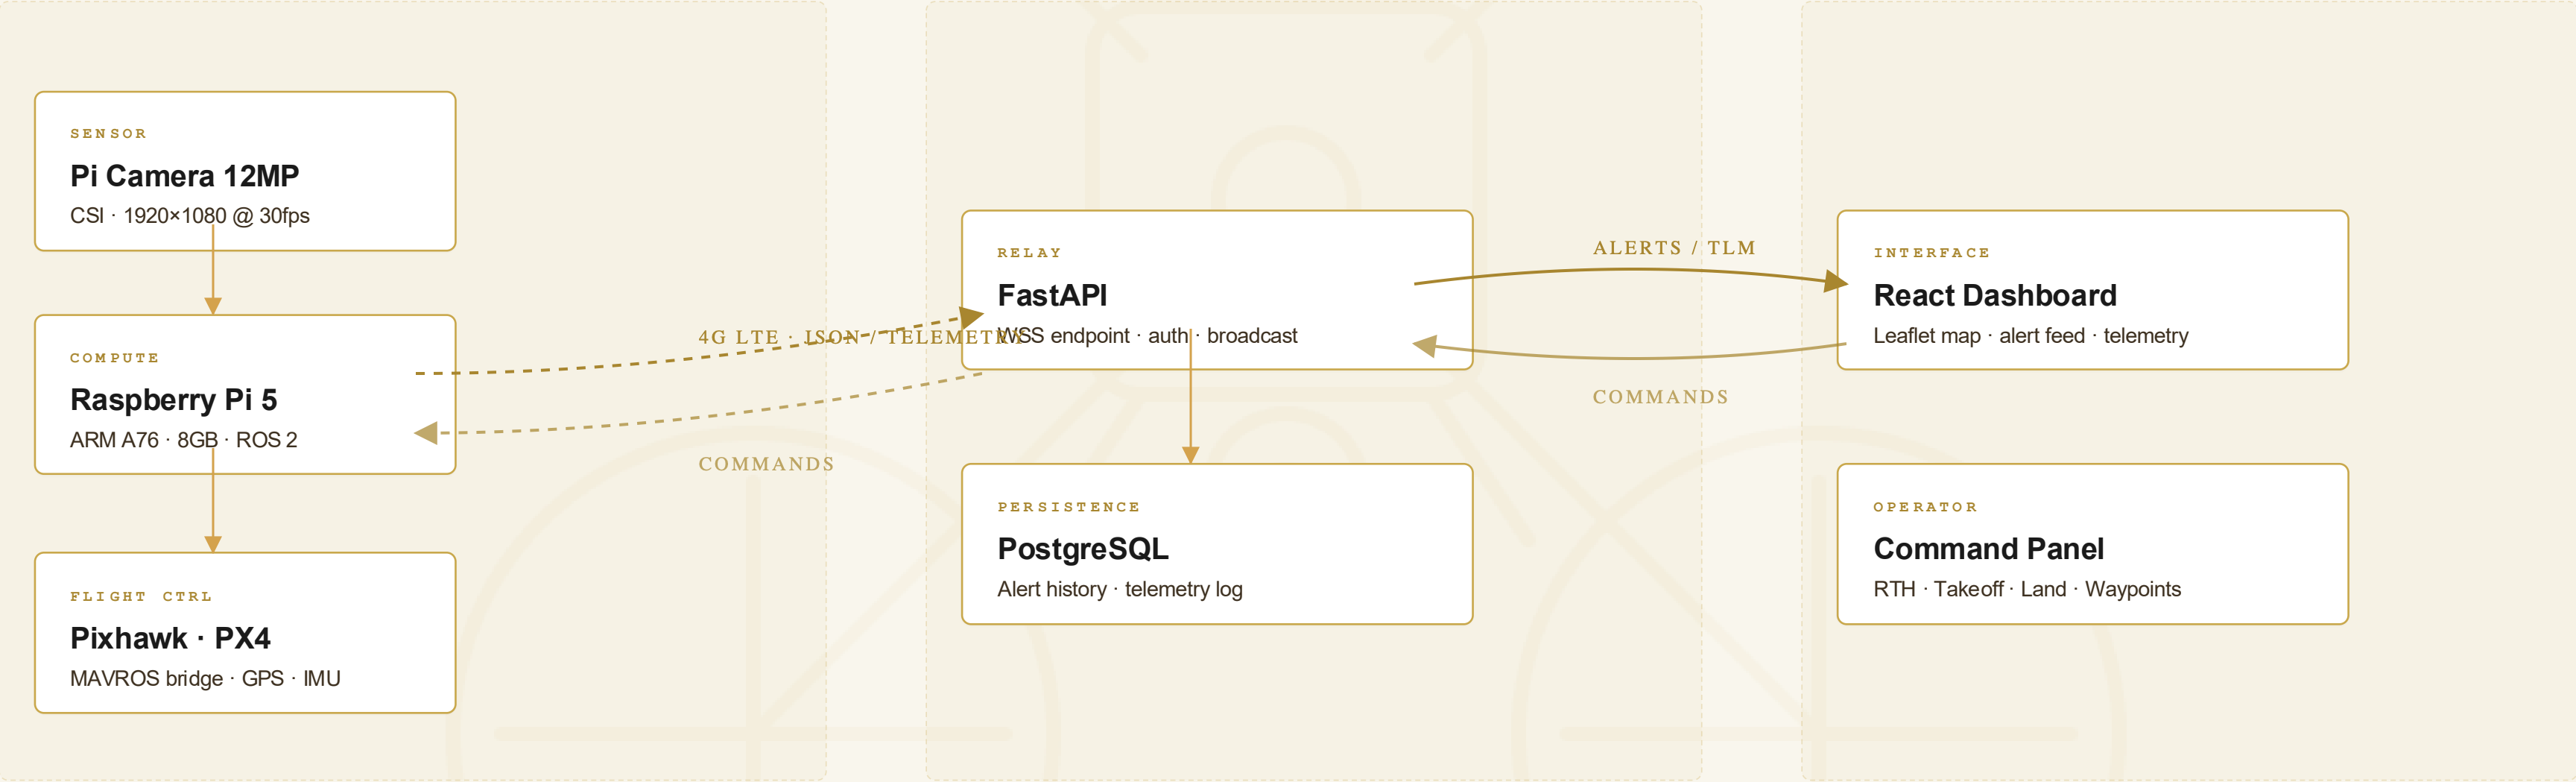

DATA POLICY

Only structured JSON alerts and telemetry cross the LTE link — no video streaming. Bandwidth requirement drops by approximately **95%**.

Hardware Stack

Off-the-shelf components, integrated and tuned. Production-grade behaviour from commodity hardware.

COMPONENTS
8 SUBSYSTEMS

A · BILL OF MATERIALS

Frame	Carbon-fiber quadcopter · 450mm wheelbase
Flight Controller	Pixhawk · PX4 firmware · 32-bit ARM
Companion Computer	Raspberry Pi 5 · Quad-core A76 · 8GB RAM
Camera	Pi Camera Module · 12MP CSI
GPS	u-blox M8N · ±2m accuracy
Comms	4G LTE USB dongle · global reach
Battery	LiPo 4S 5000mAh
RC Backup	2.4GHz receiver · manual override

B · FLIGHT SPECIFICATIONS

ALTITUDE	FLIGHT TIME	RANGE	GEOFENCE	FAILSAFE
~50 m	15–20 min	∞ 4G	Polygon	RTH @ 30%



PHOTO PLACEHOLDER


Insert hero photograph of the fully assembled **Eqaab** drone — propellers, gimbal, antenna mast visible.

ROS 2 Node Graph

Four cooperating nodes orchestrate mission, perception, identification, and uplink.


NODES

4 + MAVROS

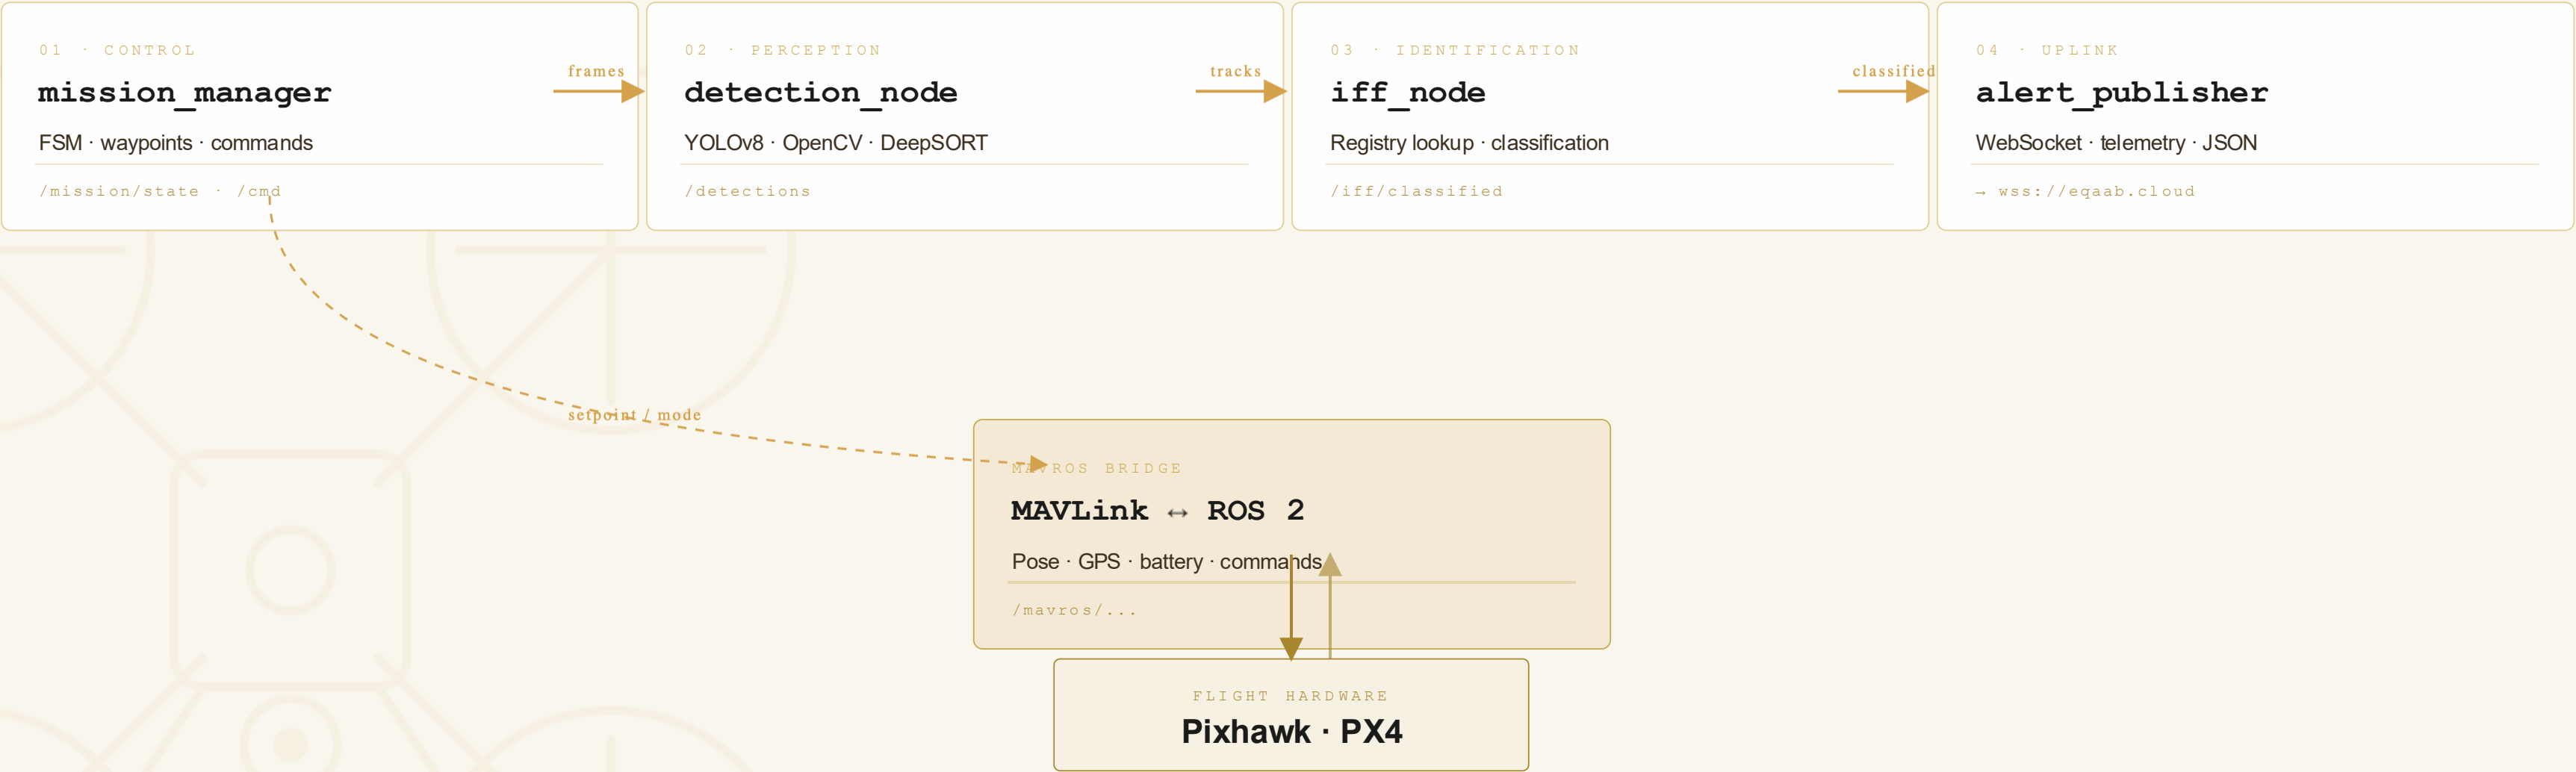

AI Detection Pipeline

A dual-model perception stack with tracking, GPS fusion, and identity classification — all on the edge device.

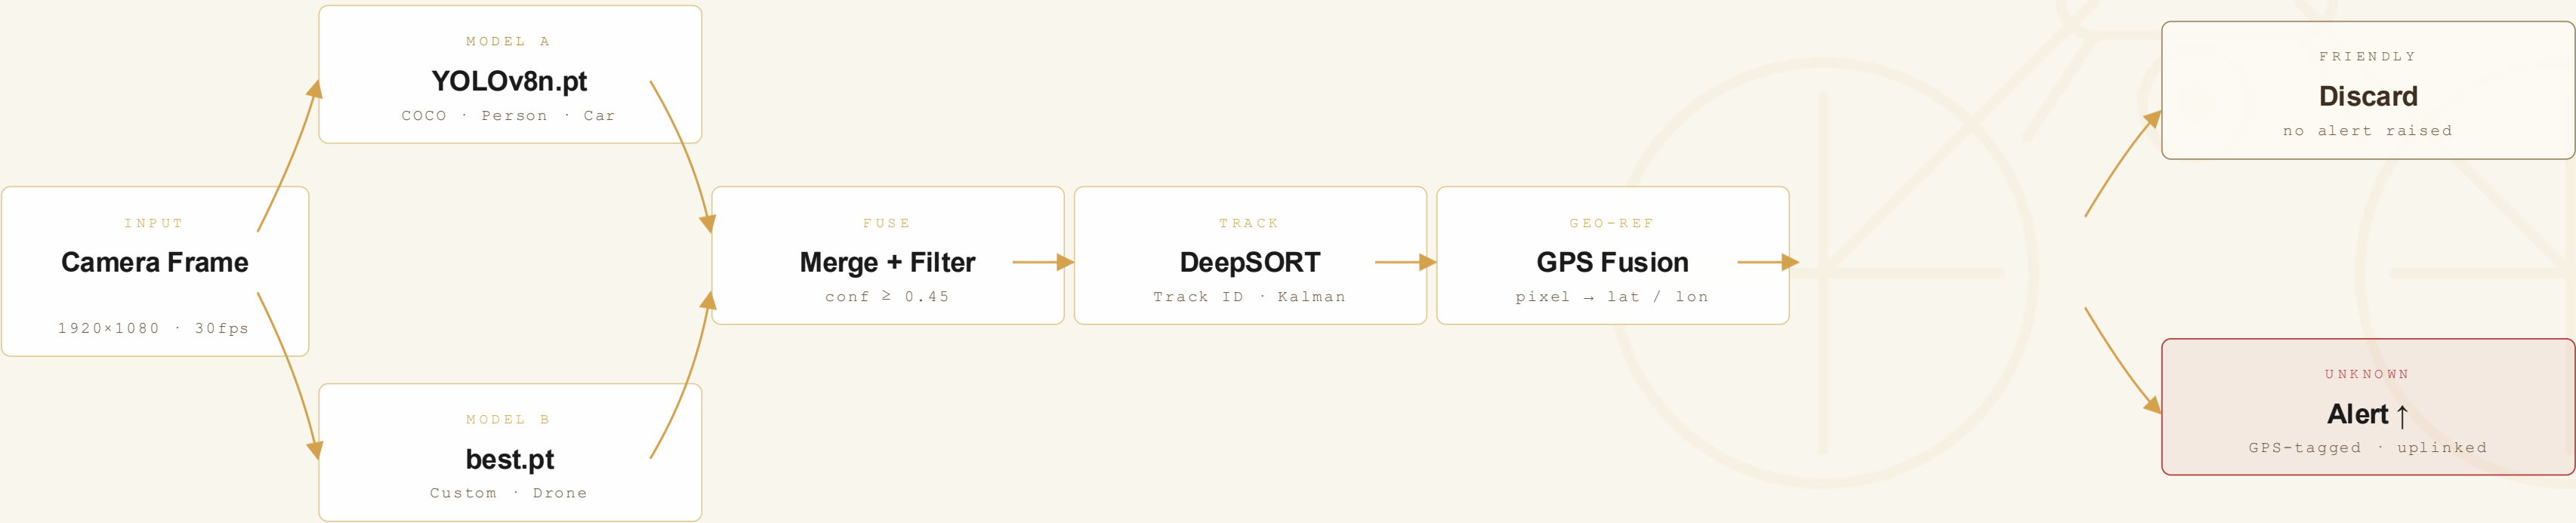


DESIGN NOTE

Dual-model architecture adopted to prevent **catastrophic forgetting** — single-model fine-tuning caused measurable degradation of COCO classes during early experiments.

IFF Decision Logic

A deterministic, fail-safe decision tree. Persons and cars never authenticate. Drones do — or get flagged.

FAIL-SAFE
→ **UNKNOWN**

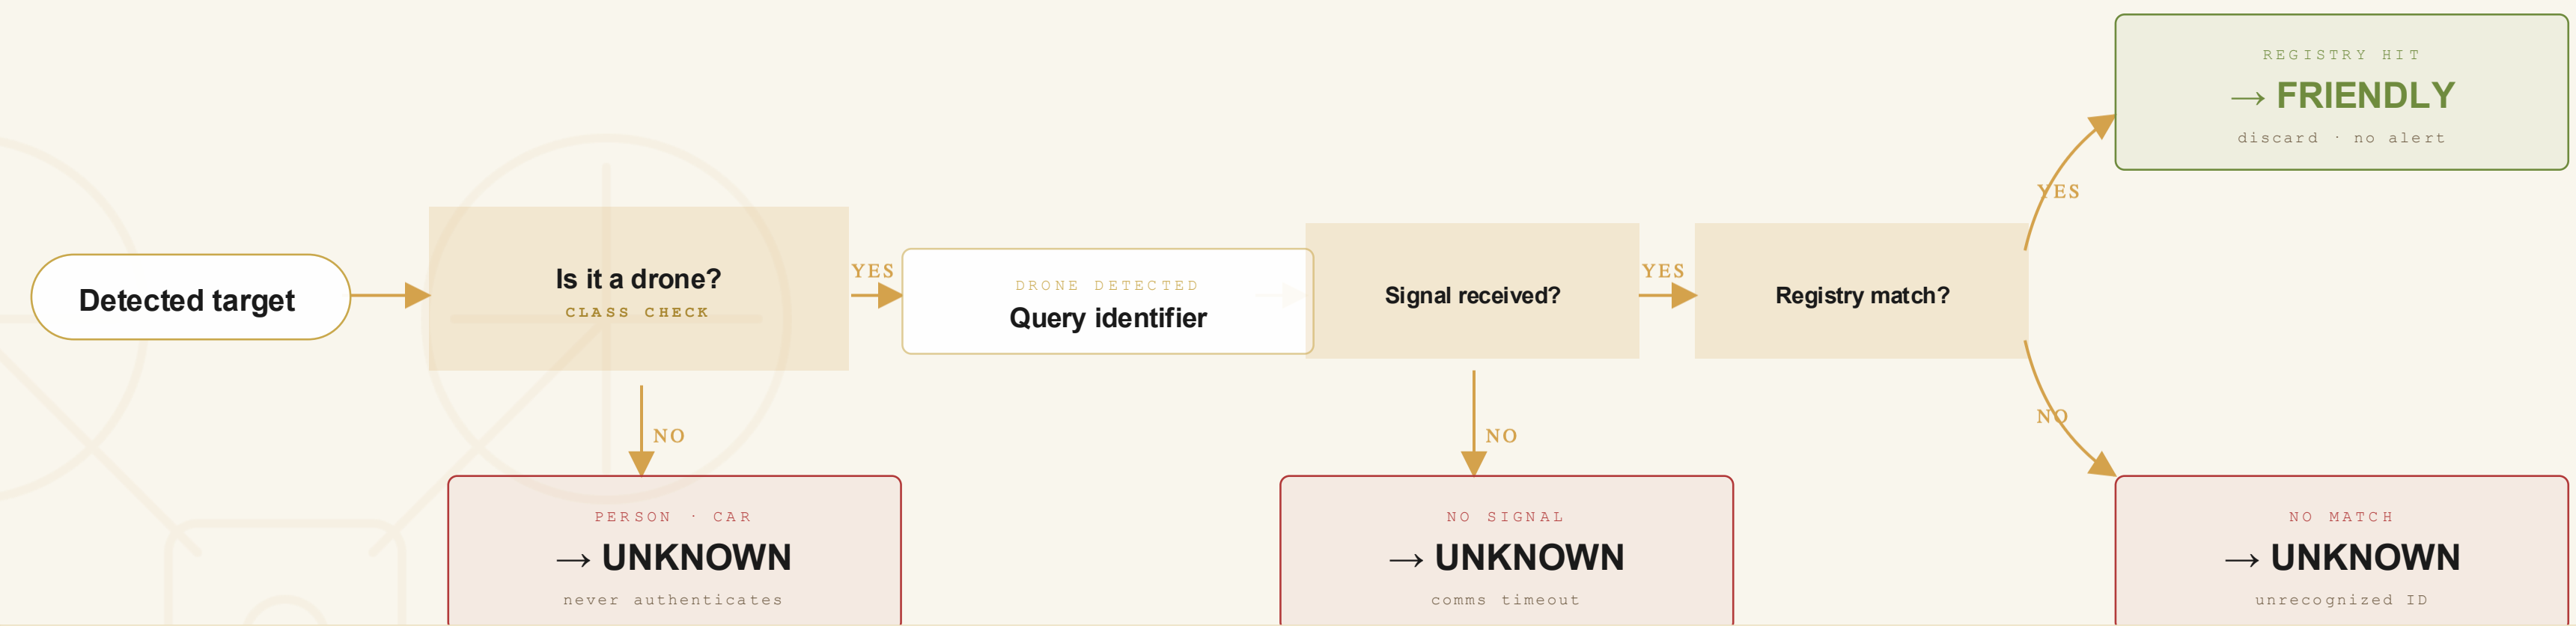


FAIL-SAFE Every failure path — class mismatch, missing signal, registry miss — defaults to **UNKNOWN**. The system raises false alerts rather than miss a threat.

Backend & Communication

A thin, opinionated cloud tier — relay, persist, broadcast. Nothing more.

ARCHITECTURE

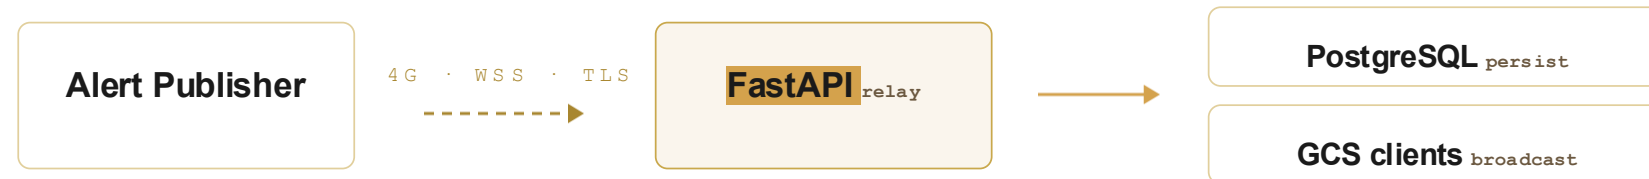

95%

BANDWIDTH SAVED

Structured JSON only — no video streaming over LTE. Cuts uplink requirement to a fraction of comparable telepresence systems.

MESSAGE · TELEMETRY

```
"type": "telemetry",
"drone_id": "EQB-01",
"ts": 1717938472,
"lat": 21.4373
```

MESSAGE · ALERT

```
{
  "type": "alert" ,
  "class": "drone" ,
  "iff": "UNKNOWN" ,
  "lat": 21.4391
```

```
"lon": 40.5103
```


GCS Dashboard

One pane of glass — map, alerts, telemetry, commands. Built with React + Leaflet.

LATENCY

~1.4S E2E



GCS DASHBOARD SCREENSHOT

Insert real GCS dashboard screenshot — should show the Leaflet map with the active drone marker and flight path, the real-time alert feed, and the telemetry bar with battery / altitude / speed / mode.

REF · EQB-GCS-01

01 Live Leaflet map

Drone position, heading, and flight path rendered in real time over satellite tiles.

02 Alert feed

Streaming list of GPS-tagged detections with class, IFF state, and confidence.

03 Telemetry bar

Battery · altitude · speed · flight mode at a glance.

04 Command panel

RTH · Takeoff · Land · Waypoint upload from the operator's seat.

Training & Dataset

Reproducible pipeline — open dataset, public framework, single GPU. Result is the `best.pt` shipped to the drone.

FINAL MAP@50

94.3%

A · DATASET

Composition

Source	Roboflow
Total images	~5,500
Classes	3 (drone · person · car)
Split	80 / 10 / 10
Augmentation	flip · brightness · mosaic · crop

B · TRAINING

Configuration

Platform	Kaggle T4 GPU
Framework	Ultralytics YOLOv8
Base model	yolov8n.pt
Epochs	100
Batch	16
Optimizer	AdamW



TRAINING CURVES

Insert `results.png` from Ultralytics — loss curves and mAP over 100 epochs.

REF · EQB-TR-01

Testing Methodology

Four stages — from individual ROS nodes up to live field flights — each with its own tooling and pass criteria.

STAGES
4 LEVELS

STAGE	WHAT WAS TESTED	METHOD	TOOL
UNIT	Individual ROS 2 nodes	Isolated node testing	<code>ros2 launch</code> · <code>pytest</code>
INTEGRATION	Full pipeline data flow	End-to-end message tracing	<code>rqt_graph</code> · terminal logs
SIMULATION	Autonomous mission FSM	Virtual flight	Gazebo · ArduPilot SITL
FIELD	Detection accuracy	Real flights · live targets	Physical drone + GCS



Unit

Each ROS node validated in isolation against mocked inputs.



Integration

Topic graph traced from camera frame to alert publish.



Simulation

FSM executed virtual missions in Gazebo before real flight.



Field

Eqaab flown against drone, vehicle, and human targets.

17 WHAT THE PLATFORM ACTUALLY DELIVERS

Results & Performance

Validated across model accuracy, edge inference, and end-to-end alert latency.

STATUS

ALL TARGETS MET

94.3%

MAP @ 0.5

Validation on held-out test split (550 images)

8.3fps

EDGE INFERENCE

On Raspberry Pi 5 · CPU-only · 640px input

91.7%

PRECISION

Averaged across 3 classes, conf ≥ 0.45

~1.4s

ALERT LATENCY

Detection → GCS render, measured end-to-end

PER-CLASS BREAKDOWN

CLASS	PRECISION	RECALL	F1	MAP@50
Drone	0.923	0.901	0.912	0.947
Person	0.914	0.889	0.901	0.938
Car	0.915	0.908	0.911	0.944
Macro avg	0.917	0.899	0.908	0.943



DETECTION SAMPLES

Insert detection example imagery — bounding boxes drawn over real footage of drone, person, and car targets.

REF · EQB-DET-01

18 THE SYSTEM IN MOTION

Live Demo

Full loop: drone detects target → onboard inference → IFF check → GPS-tagged alert → GCS map updates.

PLAYBACK
~45 SEC



DEMO VIDEO / GIF

Insert the demo recording — should walk through the full chain: drone detecting a target, onboard inference + IFF, GCS receiving the alert, and the map marker updating in real time.

REF · EQB-DEMO-01

A Detection

YOLOv8 identifies a drone target in the live camera frame; DeepSORT assigns a track ID.

B IFF + alert

Identifier query fails → target marked UNKNOWN → JSON alert published over WSS.

C GCS update

Backend relays the alert; React dashboard renders the GPS-tagged marker on the live map.

19 PRODUCTION-GRADE FOR 1% OF LEGACY COST

Cost Analysis

A complete intelligent surveillance platform — airframe through cloud — for less than a single high-end CCTV install.

TOTAL BUILD
2,690 SAR

EQAAB · THIS WORK

2,690 SAR · TOTAL

Carbon-fiber frame & motors	820
Pixhawk + PX4 stack	450
Raspberry Pi 5 (8GB)	380
Pi Camera Module	190
GPS · 4G dongle · battery	540
RC receiver · misc.	310

TRADITIONAL SURVEILLANCE

100,000s SAR

Fixed CCTV + tower install	100k+
Long-range radar	300k+
Piloted UAV system	500k+
Operator staffing (annual)	200k+
Maintenance & comms	recurring

~1%
BOM · TURN-KEY

Production-grade intelligent surveillance at roughly **1% of traditional infrastructure cost** — without sacrificing autonomy, identification, or operator control.

EQAAB · COST

20 WHAT WE PROMISED VS WHAT WE DELIVERED

Objectives **vs** Achieved

Five for five — every committed KPI met or exceeded, each backed by verifiable evidence.

RESULT
5 / 5
✓

OBJECTIVE	TARGET	ACHIEVED	EVIDENCE
Autonomous flight	Full mission	✓ Verified	Gazebo + field flights
Real-time detection	≥ 5 FPS	✓ 8.3 FPS	RPi5 benchmark · 640px
IFF classification	Friendly / Unknown	✓ Operational	Registry lookup tested
Alert transmission	< 3s latency	✓ ~1.4s	End-to-end measurement
GCS dashboard	Live map + commands	✓ Deployed	React dashboard live

5

OBJECTIVES SET

5

OBJECTIVES MET

2

EXCEEDED TARGET

Detection FPS exceeded target by **66%**; alert latency came in at less than **half** the requirement.

Challenges & Solutions

Three real engineering problems that shaped the final architecture.

PIVOTS

3 MAJOR

01

CHALLENGE

Catastrophic forgetting

Fine-tuning a single YOLOv8 model on the custom drone class measurably degraded its accuracy on the COCO person and car classes — making the model worse at the things it was already good at.



SOLUTION

Dual-model parallel architecture

Run the stock `yolov8n.pt` and the custom `best.pt` in parallel on every frame, then merge and filter. Each model stays specialised; nothing forgets.

02

CHALLENGE

4G LTE latency for piloting

Manual remote piloting over cellular incurs latency too high for safe low-altitude flight — control-loop lag became unacceptable as soon as we left line of sight.



SOLUTION

Fully autonomous FSM

Eliminate the manual control loop entirely. Operator issues *high-level* commands (RTH, takeoff, waypoints); the FSM executes locally with onboard sensors at deterministic rates.

03

CHALLENGE

CPU-only inference on RPi5

No GPU, no NPU. Larger YOLOv8 variants stalled below 3 FPS — well under our 5 FPS KPI — and risked thermal throttling during long missions.



SOLUTION

Nano variant + frame-rate cap

Switched to YOLOv8 nano, capped the inference loop, and kept the input at 640px. Sustained **8.3 FPS** with stable thermals and headroom for tracker overhead.

Future Work

Four directions that build directly on the v1 platform — none require throwing the architecture away.

ROADMAP

V2 · V3



V2 · COORDINATION

Multi-drone Coordination

Multiple Eqaab airframes sharing a single GCS — unified alert feed, deconflicted patrol routes, and cooperative tracking of fast-moving targets.



V2 · SENSOR

Thermal Imaging

Add a thermal payload alongside the RGB camera. Detection at night, through smoke, and against camouflaged targets — same pipeline, fused channels.



V3 · SECURITY

Cryptographic IFF

Replace proximity-based identifier matching with hardware-authenticated transponders. Public-key challenge / response — spoof-resistant by design.



V2 · PERFORMANCE

Edge Optimization

INT8 quantization and structured pruning of the YOLOv8 weights. Target: double the edge FPS without dropping mAP — opens headroom for larger backbones.

Conclusion

STATUS

DELIVERED

“Eqaab demonstrates that a seven-member student engineering team can design, build, and validate a complete production-grade intelligent aerial security platform — integrating autonomous flight, onboard AI, IFF classification, and live operator interfaces into a single cohesive system **at a fraction of traditional surveillance cost.**”

7

STUDENTS

24

WEEKS

1

FLYING DRONE

94.3%

mAP @ 50

THE TEAM

Abdulrahman Al-otaibiTeam Lead · Systems Integration

Turki Al-otaibiFlight Controller · PX4 tuning

Saeed Al-harhiPerception · YOLOv8 training

Rayan Al-ghamdiBackend · FastAPI · Postgres

Hossain Al-hubaileeGCS Frontend · React · Leaflet

Mohammed Al-sharifROS 2 Mission FSM · IFF

Omar Al-anziHardware Build · Field Testing

◇ THANK YOU ◇

Q & A

شكراً لكم

We welcome your questions — on architecture, training, comms, IFF, cost, or anything else.

Abdulrahman Al-otaibi

abdulrahman@tu.edu.sa

Turki Al-otaibi

turki@tu.edu.sa

Saeed Al-harathi

saeed@tu.edu.sa

Rayan Al-ghamdi

rayan@tu.edu.sa

Hossain Al-hubailee

hossain@tu.edu.sa

Mohammed Al-sharif

mohammed@tu.edu.sa

Omar Al-anzi

omar@tu.edu.sa

PROJECT ID

503593