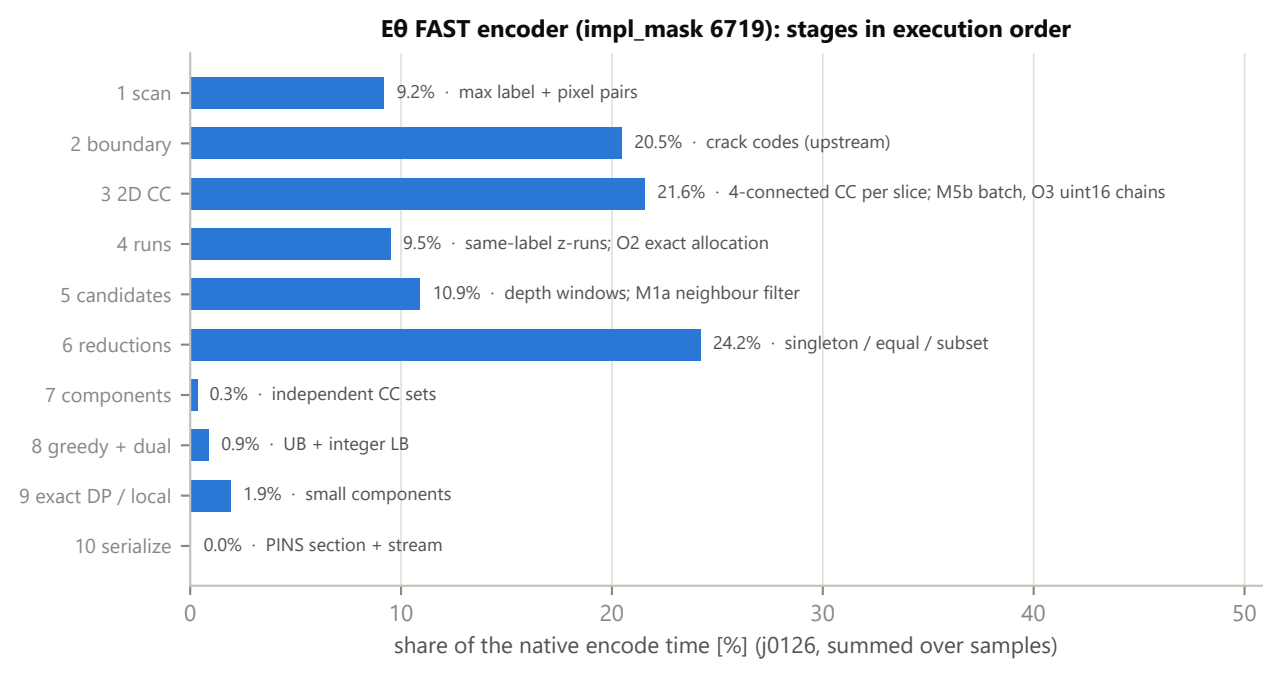
Eθ FAST encoder (impl_mask 6719): stages in execution order
1 scan
9.2% · max label + pixel pairs
2 boundary
20.5% · crack codes (upstream)
3 2D CC
21.6% · 4-connected CC per slice; M5b batch, O3 uint16 chains
4 runs
9.5% · same-label z-runs; O2 exact allocation
5 candidates
10.9% · depth windows; M1a neighbour filter
6 reductions
24.2% · singleton / equal / subset
7 components
0.3% · independent CC sets
8 greedy + dual
0.9% · UB + integer LB
9 exact DP / local
1.9% · small components
10 serialize
0.0% · PINS section + stream
0
10
20
30
40
50
share of the native encode time [%] (j0126, summed over samples)