



TIR CABLE

TIR CABLE - TRANSPARENT PVC COATED STEEL WIRE

NEW

Suitable for curtain side trailers


S187-42

- 42 meters long
- Including steel end terminals
- Transparent PVC coated
- Overall diameter ~ Ø5.6-6.0mm
- Brass coated Steel wire ~ 3mm²



Cable end terminals are fully compatible with EU standards

Thermal Properties: -40° / +80°

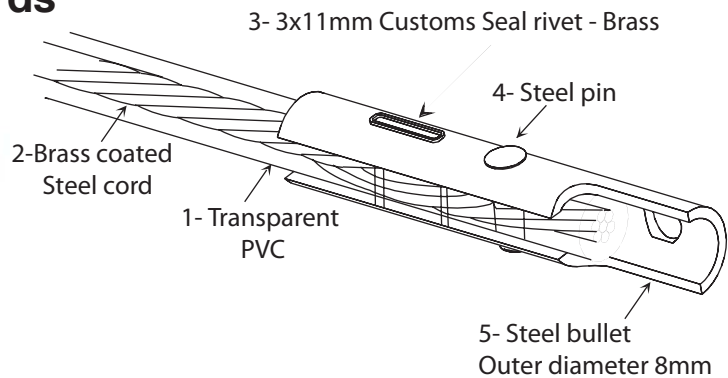

Product Code	Length
• S187-42	: 42 meters
• S187-40	: 40 meters
• S187-38	: 38 meters
• S187-36	: 36 meters
• S187-345	: 34.5 meters
• S187-34	: 34 meters
• S187-32	: 32 meters
• S187-30	: 30 meters
• S187-28	: 28 meters
• S187-24	: 24 meters

Also available in bulk packaging without end terminals



- S187-100: 100 meters**
S187-200: 200 meters
S187-300: 300 meters
S187-400: 400 meters
S187-500: 500 meters





TIR CABLE

TIR CABLE - TRANSPARENT PVC COATED STEEL WIRE

1- Transparent PVC Coating

ANALYSIS DESCRIPTION	ANALYSIS RESULT
Product / Color	DP-11 SOFT PVC GRANULE / Crystal
Hardness (ShoreA) / Density	64 ± 2 / 1,124±0,002 gr/cm ³
Tensile Strength (N/mm ²)	11,5 ± 0,5
Working Temperature (C°)	120
Elongation at break point (%)	400 ± 10

2- Brass Coated Steel Cord

Filament Diameter	Coating Thickness (μ)	Composition (%Cu)
d<0.27mm	0.20±0.04	63.5±2.5
0.27mm<d<0.32mm	0.24±0.04	63.5±2.5
d>0.32mm	0.30±0.04	63.5±2.5

3- Cupper Rivet (3x11mm)

Outside Diameter	Wall thickness (mm)	Composition (%Cu)
9mm	0.35-0.60	~ 99

5- Steel Cable End (Galvanized Steel)

PRODUCT					MECHANICAL SPECS													CHEMICAL COMPOUND %										
LABEL NO	WEIGHT (kg)	CAST NO	ROLL or PLATE NO	SLICE or PLATE PCS	TENSILE TEST				FOLD	Wg or BH	r chng	A/C or n chng	HARDNESS	IMPACT TEST DIR:				LOAD TEMP chng YIELD N/MM2	C %	MN %	P %	S %	SI %	AL %				
					NUM. PLACE	YIELD N/MM2	TENSILE N/MM2	% EL. 080						1	2	3	ORT											
0435465345	12450	4T14117687	24250305200		BE	238.3	344.2	36											0.054	0.227	0.006	0.004	0.009	0.039				

