



SAMER AUTOMOTIVE

Truck & Trailer Electrical Cables

2018



Manufactured by
 **ACAR**

ADR / GGVS
CERTIFIED



Part 9

IP 54
CERTIFIED





www.samer.com.tr

Spiral Cable with Plugs

ISO 1185 / ISO 4141-3	7P / 24V - N Type		
	SAMER Product Code	Working Length	Maximum Extension
	● R030-100	3.0 m	4.0 m
	● R030-101	3.5 m	4.5 m
	● R030-102	4.0 m	5.0 m
	● R030-103	4.5 m	5.5 m



ISO 3731 / ISO 4141-3	7P / 24V - S Type		
	● R030-110	3.0 m	4.0 m
	● R030-111	3.5 m	4.5 m
	● R030-112	4.0 m	5.0 m
	● R030-113	4.5 m	5.5 m

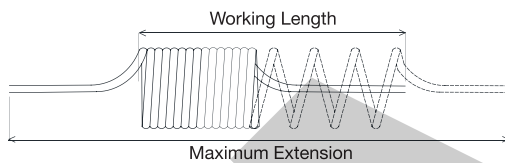



Specifications	Coil Material: Polyurethane
	Plug Material: Aluminum
	Coil Diameter: 40mm
	Inner Diameter: 20mm
Wire Thickness: 6x1.0mm + 1x1.5mm	

Spiral Cable with Plugs

ISO 1185 / ISO 4141-3	7P / 24V - N Type		
	SAMER Product Code	Working Length	Maximum Extension
	● R030-120	3.0 m	4.0 m
	● R030-121	3.5 m	4.5 m
	● R030-122	4.0 m	5.0 m
	● R030-123	4.5 m	5.5 m



ISO 3731 / ISO 4141-3	7P / 24V - S Type		
	● R030-130	3.0 m	4.0 m
	● R030-131	3.5 m	4.5 m
	● R030-132	4.0 m	5.0 m
	● R030-133	4.5 m	5.5 m

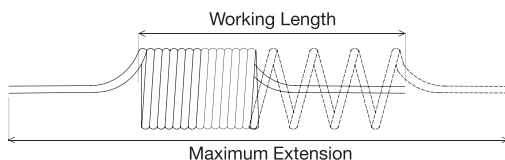

Specifications	Coil Material: Polyurethane
	Plug Material: Plastic
	Coil Diameter: 40mm
	Inner Diameter: 20mm
Wire Thickness: 6x1.0mm + 1x1.5mm	





Spiral Cable with Plugs

ISO 1185 / ISO 4141-4	7P / 24V - N Type		
	SAMER Product Code	Working Length	Maximum Extension
	● R030-200	3.0 m	4.0 m
	● R030-201	3.5 m	4.5 m
	● R030-202	4.0 m	5.0 m
	● R030-203	4.5 m	5.5 m



ISO 3731 / ISO 4141-4	7P / 24V - S Type		
	● R030-210	3.0 m	4.0 m
	● R030-211	3.5 m	4.5 m
	● R030-212	4.0 m	5.0 m
	● R030-213	4.5 m	5.5 m

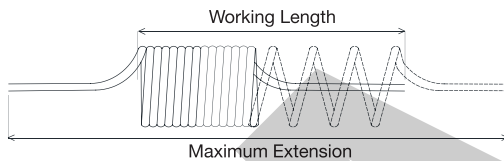


Wiring Diagram			
	Specifications		
	Coil Material: Polyurethane		
	Plug Material: Molded Plastic		
	Coil Diameter: 40mm		
	Inner Diameter: 20mm		
	Wire Thickness: 6x1.0mm + 1x1.5mm		


Spiral Cable with Plugs

ISO 1185 / ISO 4141-3	7P / 24V - N Type		
	SAMER Product Code	Working Length	Maximum Extension
	● R030-200M	3.0 m	4.0 m
	● R030-201M	3.5 m	4.5 m
	● R030-202M	4.0 m	5.0 m
	● R030-203M	4.5 m	5.5 m



ISO 3731 / ISO 4141-3	7P / 24V - S Type		
	● R030-210S	3.0 m	4.0 m
	● R030-211S	3.5 m	4.5 m
	● R030-212S	4.0 m	5.0 m
	● R030-213S	4.5 m	5.5 m

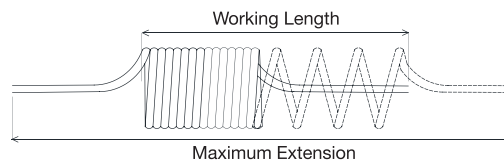


Wiring Diagram			
	Specifications		
	Coil Material: Polyurethane		
	Plug Material: Molded Plastic		
	Coil Diameter: 40mm		
	Inner Diameter: 20mm		
	Wire Thickness: 6x1.0mm + 1x1.5mm		




ABS 5 Pole Spiral Cable

5P / 24V with Plugs

ISO 7638 - 1	SAMER Product Code	Working Length	Maximum Extension
	● R030-160	3.0 m	4.0 m
	● R030-161	3.5 m	4.5 m
	● R030-162	4.0 m	5.0 m
	● R030-163	4.5 m	5.5 m

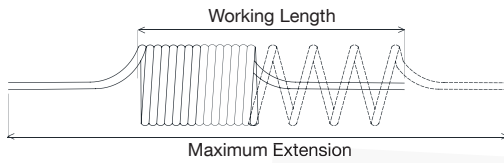

Wiring Diagram



Specifications

Coil Material: Polyurethane
Coil Diameter: 45mm
Inner Diameter: 20mm
Wire Thickness: 3x1.5mm + 2x2.5mm


ADR / GGVS
CERTIFIED




EBS 7 Pole Spiral Cable

7P / 24V with Plugs

ISO 7638 - 1	SAMER Product Code	Working Length	Maximum Extension
	● R030-170	3.0 m	4.0 m
	● R030-171	3.5 m	4.5 m
	● R030-172	4.0 m	5.0 m
	● R030-173	4.5 m	5.5 m

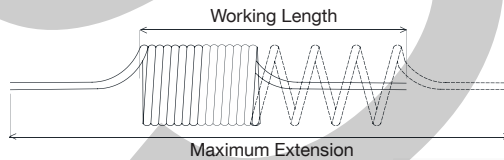

Wiring Diagram



Specifications


Coil Material: Polyurethane
Coil Diameter: 45mm
Inner Diameter: 20mm
Wire Thickness: 5x1.5mm + 2x2.5mm

ADR / GGVS
CERTIFIED




ABS 15 Pole Spiral Cable			
ISO 12098	15P / 24V with Plugs		
	SAMER Product Code	Working Length	Maximum Extension
	• R030-180	3.0 m	4.0 m
	• R030-181	3.5 m	4.5 m
	• R030-182	4.0 m	5.0 m
• R030-183	4.5 m	5.5 m	



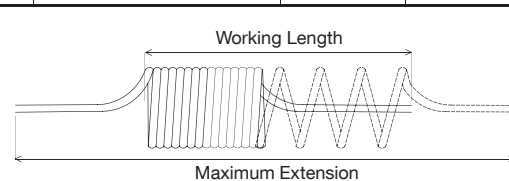


ADR / GGVS CERTIFIED





Wiring Diagram


Pin 1: Yellow	Pin 9: Orange
Pin 2: Green	Pin 10: Grey
Pin 3: Blue	Pin 11: White/Black
Pin 4: White	Pin 12: White/Blue
Pin 5: Black	Pin 13: White/Red
Pin 6: Brown	Pin 14: White/Green
Pin 7: Red	Pin 15: White/Brown
Pin 8: Pink	

Specifications

Coil Material: Polyurethane
Coil Diameter: 65mm
Inner Diameter: 30mm
Wire Thickness: 12x1.5mm + 3x2.5mm


ABS Adapter Cable			
ISO 12098 / ISO 1185 / ISO 3731	15P/2x7 24V / Plastic Plugs		
	SAMER Product Code	Working Length	Maximum Extension
	• R030-190P	3.0 m	4.0 m
	• R030-191P	3.5 m	4.5 m
	• R030-192P	4.0 m	5.0 m
• R030-193P	4.5 m	5.5 m	



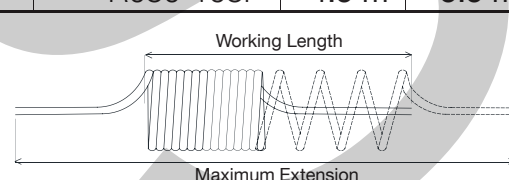


ADR / GGVS CERTIFIED





Wiring Diagram

Pin 1: Yellow / N Type	Pin 9: Green / S Type
Pin 2: Green / N Type	Pin 10: N/A
Pin 3: Blue / S Type	Pin 11: N/A
Pin 4: White / N-S Type	Pin 12: Brown / S Type
Pin 5: Black / N Type	Pin 13: Green / S Type
Pin 6: Brown / N Type	Pin 14: Black / S Type
Pin 7: Red / N Type	Pin 15: Blue / N Type
Pin 8: Yellow / S Type	

Specifications

Coil Material: Polyurethane
Coil Diameter: 40mm
Inner Diameter: 20mm
Wire Thickness: 2x(6x1.0mm + 1x1.5mm)



ISO 12098 / ISO 1185 / ISO 3731


ABS Adaptor Cable

15P/2x7 24V / Aluminum Plugs

SAMER Product Code	Working Length	Maximum Extension
• R030-190M	3.0 m	4.0 m
• R030-191M	3.5 m	4.5 m
• R030-192M	4.0 m	5.0 m
• R030-193M	4.5 m	5.5 m




S Type Aluminum Plug N Type Aluminum Plug

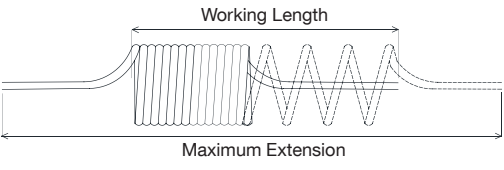







Wiring Diagram

Pin 1: Yellow / N Type	Pin 9: Green / S Type
Pin 2: Green / N Type	Pin 10: N/A
Pin 3: Blue / S Type	Pin 11: N/A
Pin 4: White / N-S Type	Pin 12: Brown / S Type
Pin 5: Black / N Type	Pin 13: Green / S Type
Pin 6: Brown / N Type	Pin 14: Black / S Type
Pin 7: Red / N Type	Pin 15: Blue / N Type
Pin 8: Yellow / S Type	

Specifications


Coil Material: Polyurethane
Coil Diameter: 40mm
Inner Diameter: 20mm
Wire Thickness: 2x(6x1.0mm + 1x1.5mm)

ISO 12098 / ISO 1185 / ISO 3731


ABS Adaptor Cable

15P/2x7 24V / Plastic Molded Plugs

SAMER Product Code	Working Length	Maximum Extension
• R030-190PM	3.0 m	4.0 m
• R030-191PM	3.5 m	4.5 m
• R030-192PM	4.0 m	5.0 m
• R030-193PM	4.5 m	5.5 m

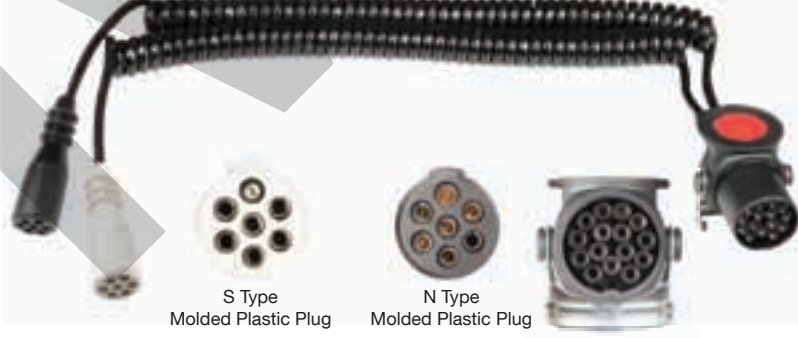


S Type Molded Plastic Plug N Type Molded Plastic Plug

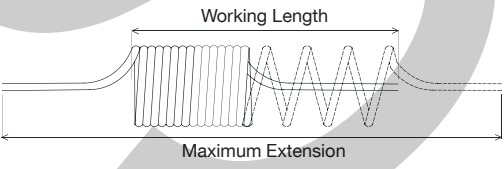







Wiring Diagram

Pin 1: Yellow / N Type	Pin 9: Green / S Type
Pin 2: Green / N Type	Pin 10: N/A
Pin 3: Blue / S Type	Pin 11: N/A
Pin 4: White / N-S Type	Pin 12: Brown / S Type
Pin 5: Black / N Type	Pin 13: Green / S Type
Pin 6: Brown / N Type	Pin 14: Black / S Type
Pin 7: Red / N Type	Pin 15: Blue / N Type
Pin 8: Yellow / S Type	

Specifications

Coil Material: Polyurethane
Coil Diameter: 40mm
Inner Diameter: 20mm
Wire Thickness: 2x(6x1.0mm + 1x1.5mm)





Spiral Cable with Plugs

ISO 1724	7P / 12V - N Type		
	SAMER Product Code	Working Length	Maximum Extension
	● R030-140	3.0 m	4.0 m
	● R030-141	3.5 m	4.5 m
	● R030-142	4.0 m	5.0 m
	● R030-143	4.5 m	5.5 m



ISO 3732	7P / 12V - S Type		
	● R030-150	3.0 m	4.0 m
	● R030-151	3.5 m	4.5 m
	● R030-152	4.0 m	5.0 m
	● R030-153	4.5 m	5.5 m


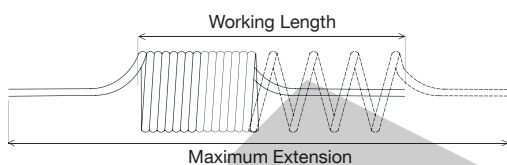


Specifications	Coil Material: Polyurethane
	Plug Material: Aluminium
	Coil Diameter: 40mm
	Inner Diameter: 20mm
Wire Thickness: 6x1.0mm + 1x1.5mm	

ABS Adaptor Cable

15P/2x7 24V / Aluminum Plugs

ISO 12098 / ISO 1185 / ISO 3731	SAMER Product Code	Working Length	Maximum Extension
	● R030-190PMS	3.0 m	4.0 m
	● R030-191PMS	3.5 m	4.5 m
	● R030-192PMS	4.0 m	5.0 m
	● R030-193PMS	4.5 m	5.5 m

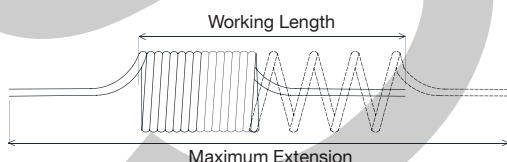
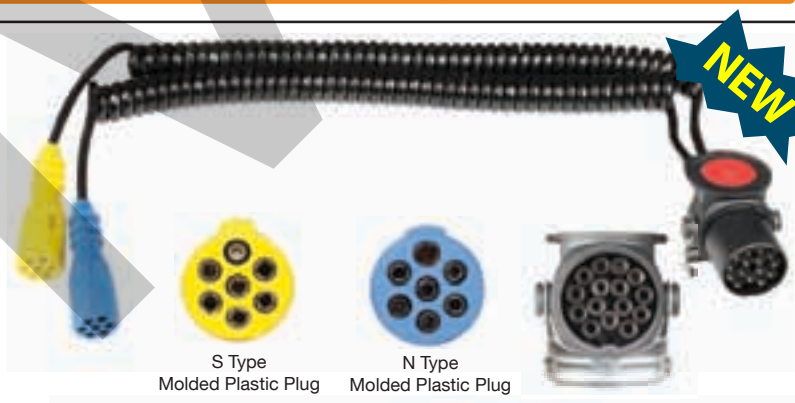


Wiring Diagram

Pin 1: Yellow / N Type	Pin 9: Green / S Type
Pin 2: Green / N Type	Pin 10: N/A
Pin 3: Blue / S Type	Pin 11: N/A
Pin 4: White / N-S Type	Pin 12: Brown / S Type
Pin 5: Black / N Type	Pin 13: Green / S Type
Pin 6: Brown / N Type	Pin 14: Black / S Type
Pin 7: Red / N Type	Pin 15: Blue / N Type
Pin 8: Yellow / S Type	

Specifications	Coil Material: Polyurethane
	Coil Diameter: 40mm
	Inner Diameter: 20mm
	Wire Thickness: 2x(6x1.0mm + 1x1.5mm)

ADR / GGVS CERTIFIED

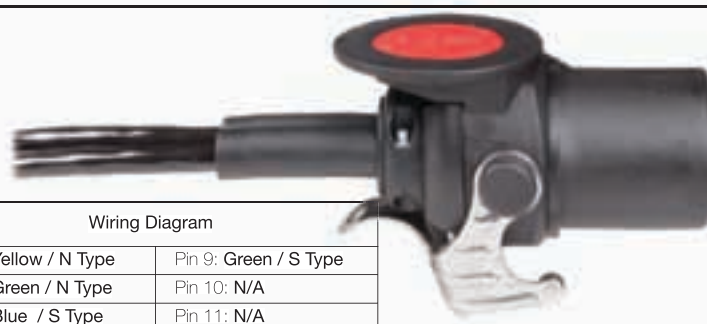

ABS Compact Adaptor

15P / 24V with Flat Terminals

**SAMER
Product Code**


Specification

● R010-06

13 Pins connected



ADR / GGVS
CERTIFIED



Pin Diagram (13 Pin - New Type)

Pin 1: Yellow / N Type	Pin 9: Green / S Type
Pin 2: Green / N Type	Pin 10: N/A
Pin 3: Blue / S Type	Pin 11: N/A
Pin 4: White / N-S Type	Pin 12: Brown / S Type
Pin 5: Black / N Type	Pin 13: Green / S Type
Pin 6: Brown / N Type	Pin 14: Black / S Type
Pin 7: Red / N Type	Pin 15: Blue / N Type
Pin 8: Yellow / S Type	

Specifications	White Cap: S Type Plug
	Black cap: N Type Plug
	Handle: Stainless Steel
	Plug Caps: Spring powered

12V Aluminium Plug

12V Socket - 7 pin

**SAMER
Product Code**

Specifications

- S070-03 - N Type / Screw Terminals
- S070-04 - S Type / Screw Terminals



12V Aluminium Socket

12V Socket - 7 pin

**SAMER
Product Code**

Specifications

- S080-03 - N Type / Screw Terminals
- S080-04 - S Type / Screw Terminals



24V Aluminium Plug

24V Plug - 7 pin

ISO 1185 (N) - ISO 3731 (S)

SAMER Product Code	Specifications
● S070-01	- N Type / Screw Terminals
● S070-02	- S Type / Screw Terminals
● S070-01A	- N Type / Flat Terminals
● S070-02A	- S Type / Flat Terminals



24V Plastic Plug

24V Plug - 7 pin

ISO 1185 (N) - ISO 3731 (S)

SAMER Product Code	Specifications
● R010-01	- N Type / Screw Terminals
● R010-02	- S Type / Screw Terminals



24V Aluminium Socket

24V Socket - 7 pin

ISO 1185 (N) - ISO 3731 (S)

SAMER Product Code	Specifications
● S080-01	- N Type / Screw Terminals
● S080-02	- S Type / Screw Terminals
● S080-01A	- N Type / Flat Terminals
● S080-02A	- S Type / Flat Terminals



24V Plastic Socket

24V Socket - 7 pin

ISO 1185 (N) - ISO 3731 (S)

SAMER Product Code	Specifications
● R020-01	- N Type / Screw Terminals
● R020-02	- S Type / Screw Terminals



ISO 7638-1			ABS Plug		
		24V Plug			
		SAMER	Specifications		
		Product Code			
		●R010-03	- 5 pin Plug		
			- With Flat Terminals		
			- For 5 pin cables		
		ADR & IP54 Certified			

ISO 7638-1			ABS Plug		
		24V Plug			
		SAMER	Specifications		
		Product Code			
		●R010-03-1	- 5 pin Plug		
			- With Screw Terminals		
			- For 5 pin cables		
		ADR & IP54 Certified			

EBS Plug			
ISO 7638-1	24V Plug		
	SAMER Product Code	Specifications	
	●R010-04	- 7 pin Plug	
		- With Flat Terminals	
- For 7 pin cables			
ADR & IP54 Certified			

EBS Plug			
ISO 7638-1	24V Plug		
	SAMER Product Code	Specifications	
	●R010-04-1	- 7 pin Plug	
		- With Screw Terminals	
- For 7 pin cables			
ADR & IP54 Certified			



ABS Plug		
ISO 12098	24V Plug	
	SAMER Product Code	Specifications
	●R010-05	- 15 pin Plug
		- With Flat Terminals
		- For 15 pin cables
ADR & IP54 Certified		

ABS Plug		
ISO 12098	24V Plug	
	SAMER Product Code	Specifications
	●R010-05-1	- 15 pin Plug
		- With Screw Terminals
		- For 15 pin cables
ADR & IP54 Certified		

ISO 12098			ABS Plug		
			24V Plug		
SAMER Product Code		Specifications			
●R010-05-2		- 15 pin Plug			
		- With Flat Terminals			
		- For 15 pin adaptors			
ADR & IP54 Certified					

ISO 12098			ABS Plug		
			24V Plug		
SAMER Product Code		Specifications			
●R010-05-3		- 15 pin Plug			
		- With Screw Terminals			
		- For 15 pin adaptors			
ADR & IP54 Certified					



ACAR METAL Kalip San ve Tic Ltd Sti

Organize Sanayi Bölgesi Esenkent Mah. Baysal sok. No:24 - Ümraniye / İstanbul - Turkey

has been granted to be capable of manufacturing according to the requirements of

ADR Part 9

for the following products on 2008-12-23:

✓ 7 pole 12/24V EBS connectors

✓ 15 pole 12/24V ABS connectors

in connection with enclosures **IP54**

Tests according to ADR part 9 were carried out on 7 and 15 pole ABS and EBS connectors for the electrical connection of towing and towed vehicles with 12V and 24V nominal DC Voltage supply. The 7 and 15 pole connectors for road vehicles passed all the tests without any damage or failure.

Report No: P08-0318a / P08-0318b

approved by **Brunel**
access to excellence

Brunel Car Synergies
Dinnendahlstr. 9
44809 Bochum
GERMANY
www.brunel.de

Manufactured by

 **ACAR**

SAMER AUTOMOTIVE

Truck & Trailer Electrical Cables

Esenkent Mahallesi Baysal Sk. No:24 34760 Ümraniye / İstanbul - TURKEY

Tel: +90 216 364 73 19 - 20 Fax: +90 216 466 59 43 info@samer.com.tr

www.samer.com.tr