

## Features

- Normally Open Configuration: Ensures reliable operation
- Polypropylene Housing: Provides durability and resistance to various chemicals
- Easy Assembly: Designed for installation from outside the tank
- FDA Approved: Meets stringent safety and compliance standards
- 

## RS PRO Float Switch- Level Sensor, NO Output, Horizontal, Polypropylene

RS Stock No.: 0307108



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

Introducing the RS PRO Float Switch – a state-of-the-art vertical float magnetic level sensor designed to transform liquid level detection. Encased in stainless steel and featuring a form-A normally closed ruthenium contact, this ultra-small float switch excels in applications such as coffee machines and maintaining optimal water levels in tanks.

## Electrical Specifications


| Electrical Characteristics |        | @ 25 °C |
|----------------------------|--------|---------|
| Contact form               |        | A       |
| Contact rating max.        | W / VA | 50      |
| Switching voltage max.     | VDC    | 200     |
|                            | VAC    | 250     |
| Switching current max.     | A      | 1.5     |
| Carry current max.         | A      | 2       |
| Breakdown voltage min.     | VDC    | 400     |
| Total resistance max.      | mΩ     | 200     |

| Environmental Characteristics |    |            |
|-------------------------------|----|------------|
| Operating temperature         | °C | -20 to +65 |
| Storage temperature           | °C | -20 to +65 |

| Mechanical Characteristics            |                     |                        |
|---------------------------------------|---------------------|------------------------|
| Density of float typ.*                | g / cm <sup>3</sup> | 0.7                    |
| Recommended minimum gravity of medium | g / cm <sup>3</sup> | Density of float + 20% |

\* in delivery condition


## Dimensions in mm

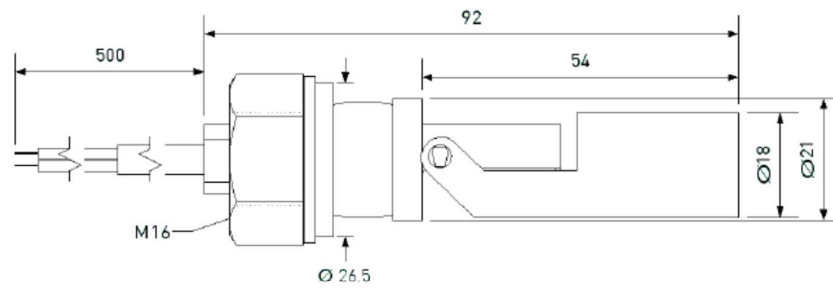

## Material Information

|                  | Material                                                | Colour |
|------------------|---------------------------------------------------------|--------|
| HOUSING          | PP                                                      | black  |
| Cable            | UL 2464, AWG 22, 20mm dismantelt4mm stripped and tinned | Black  |
| Nut              | PP, M 16 x 12 mm                                        | black  |
| Float            | PP                                                      | black  |
| Potting compound | Epoxy                                                   | black  |
| Sealing ring     | EPDM                                                    | black  |
| Washer           | PPID 16.5 x OD 28.7 x H2.0 mm                           | black  |

## Operation View

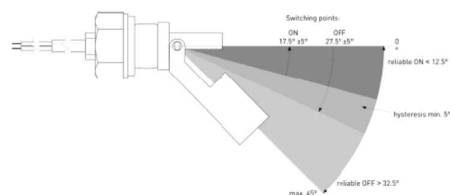


## Remarks

When mounted near ferromagnetic parts switching distance of PLS-092A-6PPH may vary.

Electromagnetical influences and magnetic fields may change the switching behaviour of the Level Sensor.

## Mounting

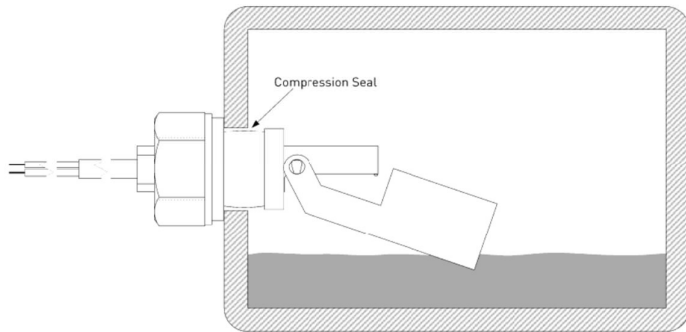

When mounted stem up,  
operating functions are reversed.