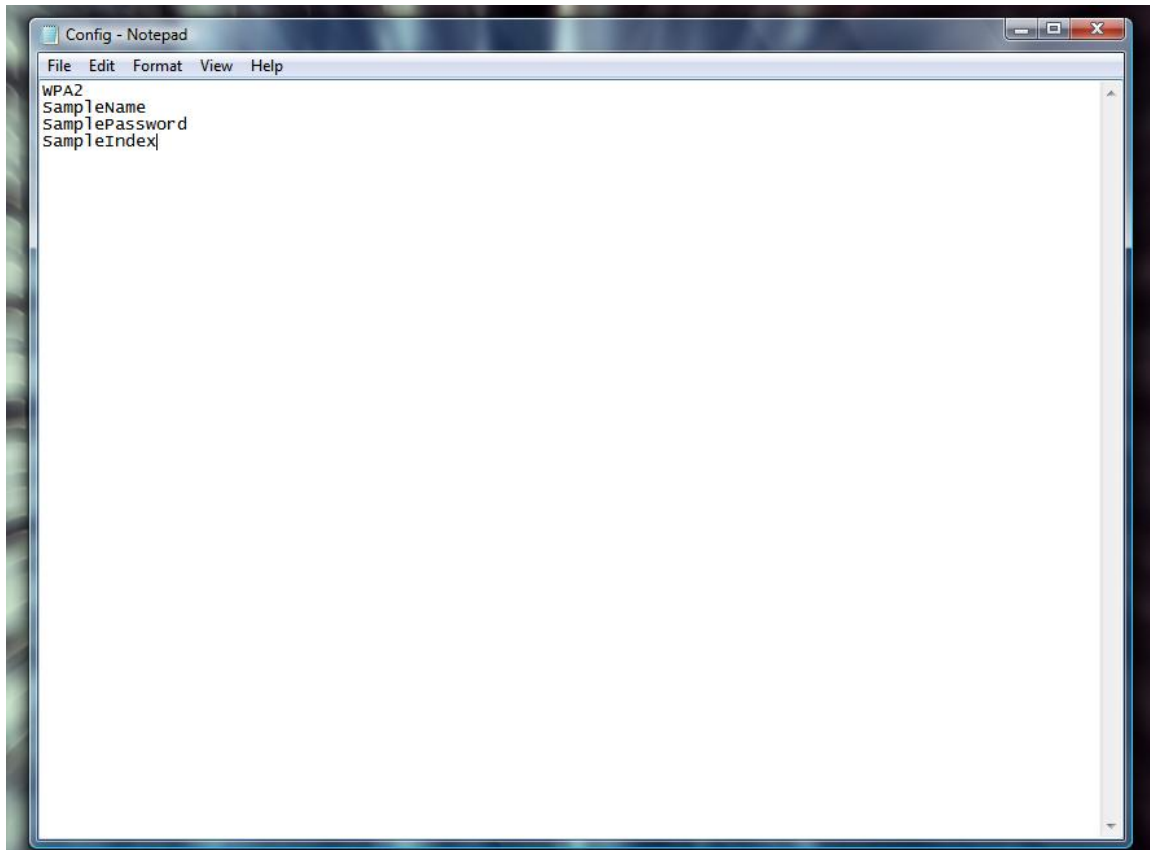# Hardware Configuration

⚠️ Always have the SmartSocket™ unplugged before opening the lid, shock and electrocution may occur.

Step 1: Configuring Network Settings

Verify Smart Socket is unplugged.

Remove the mircoSD from the SmartSocket™.

Create a file called Config.txt on the root of the microSD card.

The first line is the Network Security type, this can be WPA2, WEP, or NONE.
The second line is the network name.
The third line is the network security password, if there is no password write none in this line.
The fourth line is the network key index (for WEP networks) use 1 if not a WEP network.

Put mircoSD card back in SmartSocket™, close lid and plug in.

Setup is complete.