



The MG Car Co.

SOS IM6 Test line Facility

Date: 24-Dec-2025



1. Tester line NCA HLA parameter addition and teaching
2. Tester line I ACC Booth Modification For front and rear radar
3. Care 2 Line booth modification for AVM and LDW
4. Tester line I DVT parameter addition

Test line for LS6: NCA/HLA & DVT



MORRIS GARAGES
Since 1924

Sr No	Description	IM6	Machine
1	Track width	F 1698 R 1707	2000
2	Width	1988	2400
3	Wheelbase	2950	3200



SOS:

- 1) NCA/HLA parameters addition
- 2) NCA and head lamp teaching
- 3) DVT software changes for TPMS, Dynamic brake, VCU etc.

Test line for LS6: Front and rear Radar calibration



MORRIS GARAGES

SN	Description	For IM6	Available
1	Rear end space required for gantry	3400	4000
2	Front target plate	350*350 to 700*700	760*660




- GAI shop ACC station will be modified
- for front and rear radar

SOS:

- New Rear gantry with 2 target plates
- Replacement of current ACC target plate
- Machine software modification
- Panel hardware addition and wiring
- Prove out of present models with new ACC plate

Installation Position of Radars

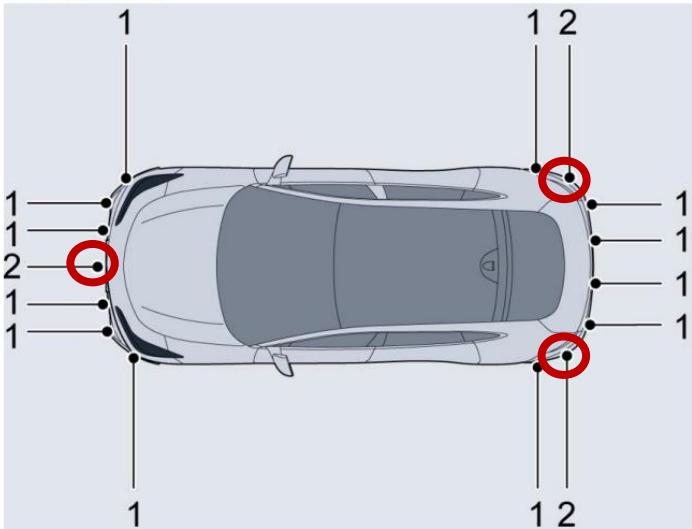

1. Ultrasonic radar
2. Millimeter-wave radar

MGI booth



China booth


Test line for LS6: Front and rear Radar calibration



MORRIS GARAGES
Since 1924

Installation Position of Radars

Front Radar for ACC

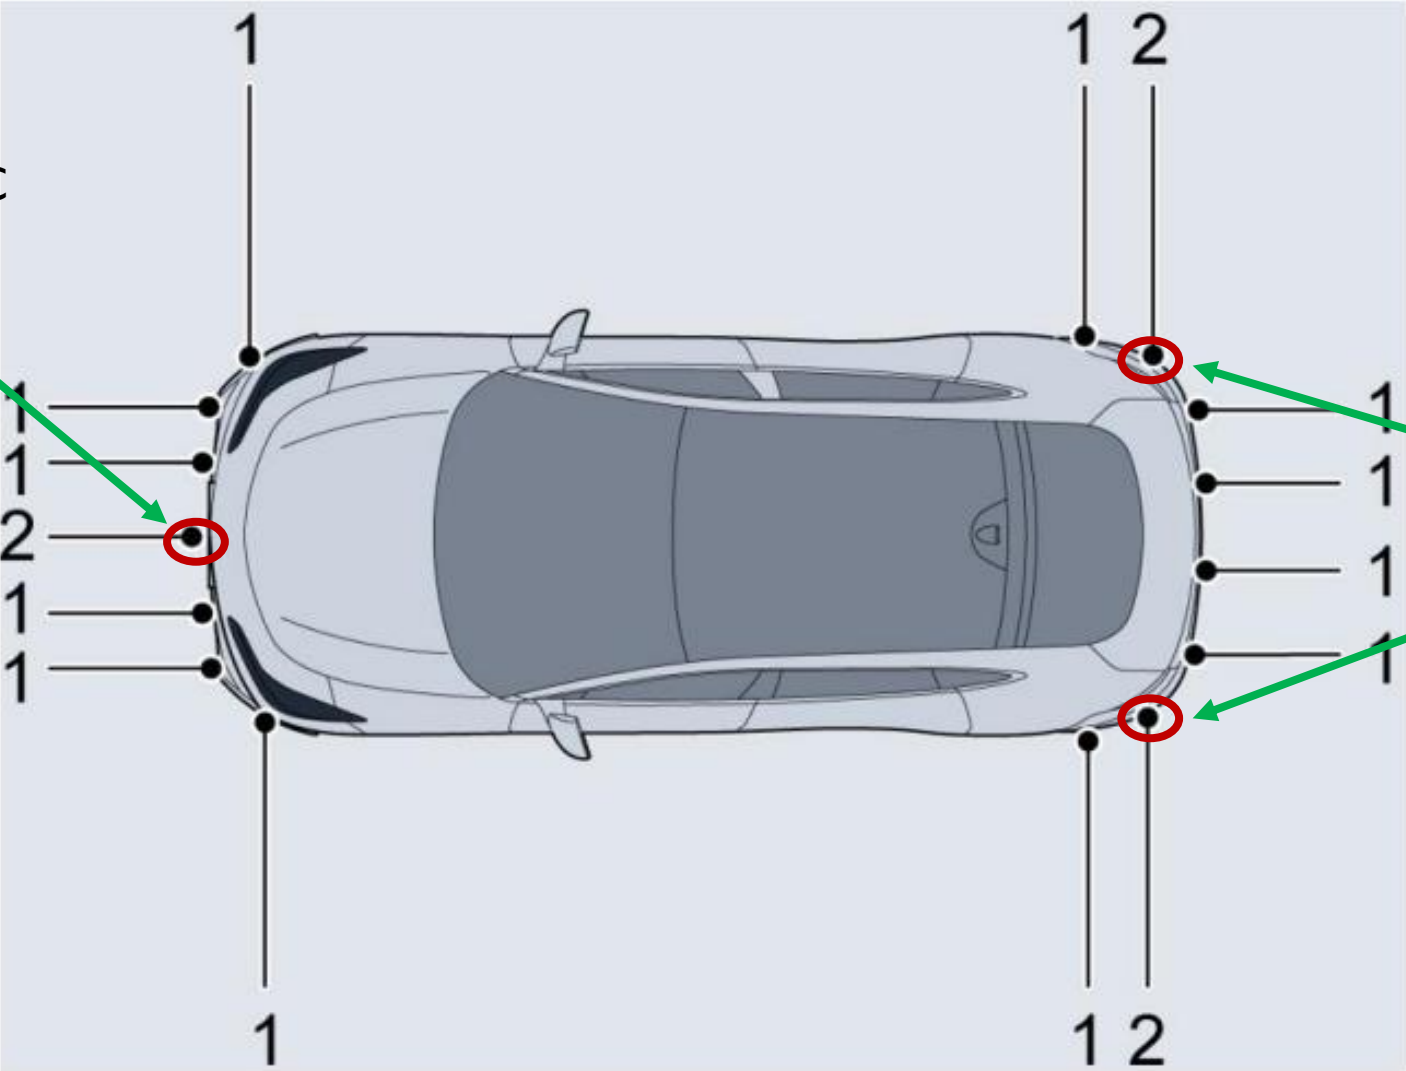

Rear Radar for BSD

- 1. Ultrasonic radar
- 2. Millimeter-wave radar

Test line for LS6: Camera calibration




MORRIS GARAGES
Since 1924

Sr No	Description	For IM6	Available at care 2
1	Booth length	25 meter	27 meter
2	Booth width	7 meter	5.5 meter/10 meters
3	Booth Height	4 meter	3/10 meter

Current care 2 booth width and height is NOK Need to vacate booth for AVM/LDW

SOS:

- Tester 2 ACC booth centering unit booth relocation to care line
- AVM target patterns
- New panel with PC and software
- 30 No of 32" screen and mounting
- All Booth accessories for vehicle testing

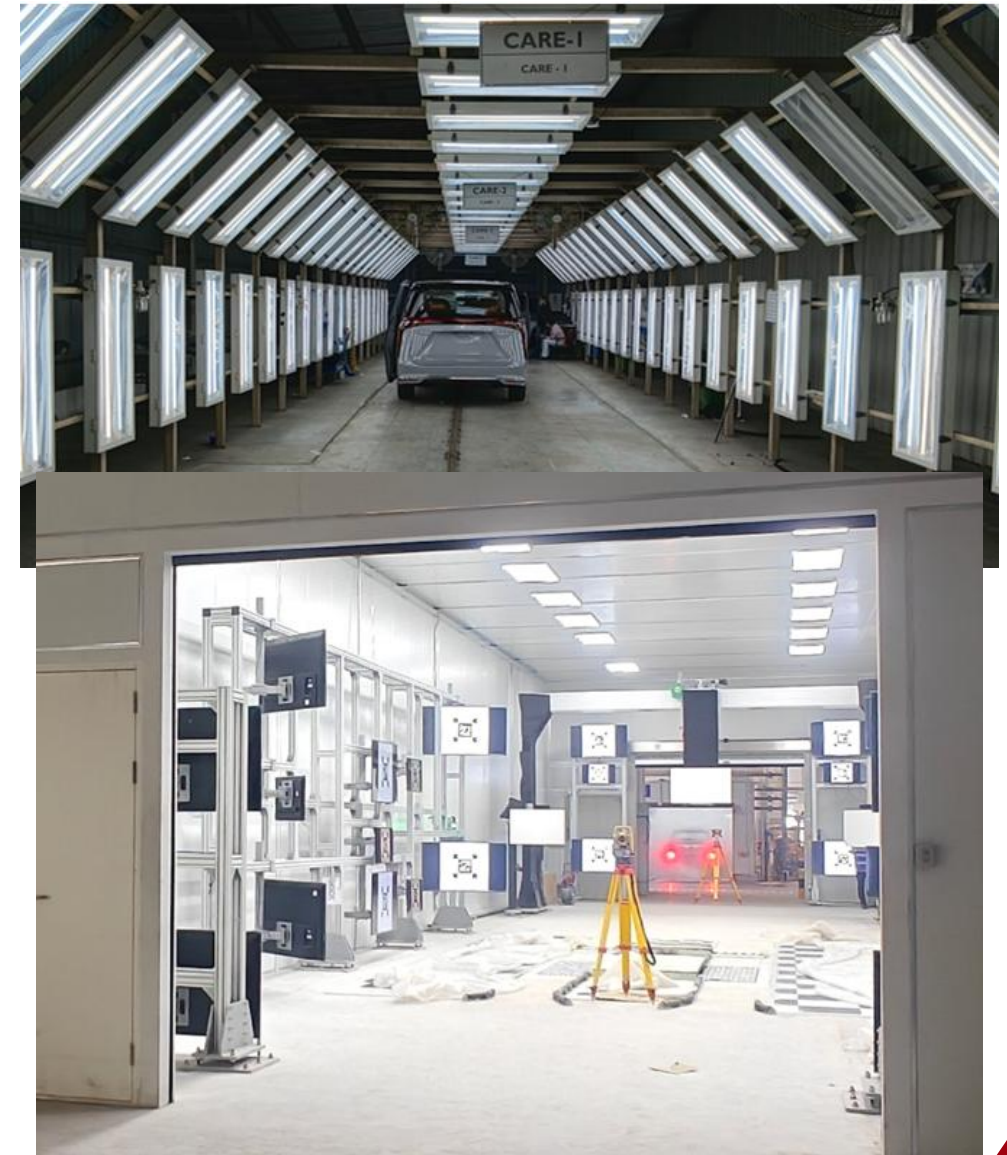


China AVM/LDW booth

Test line for LS6: Camera calibration




MORRIS GARAGES
Since 1924

Installation Position of Cameras

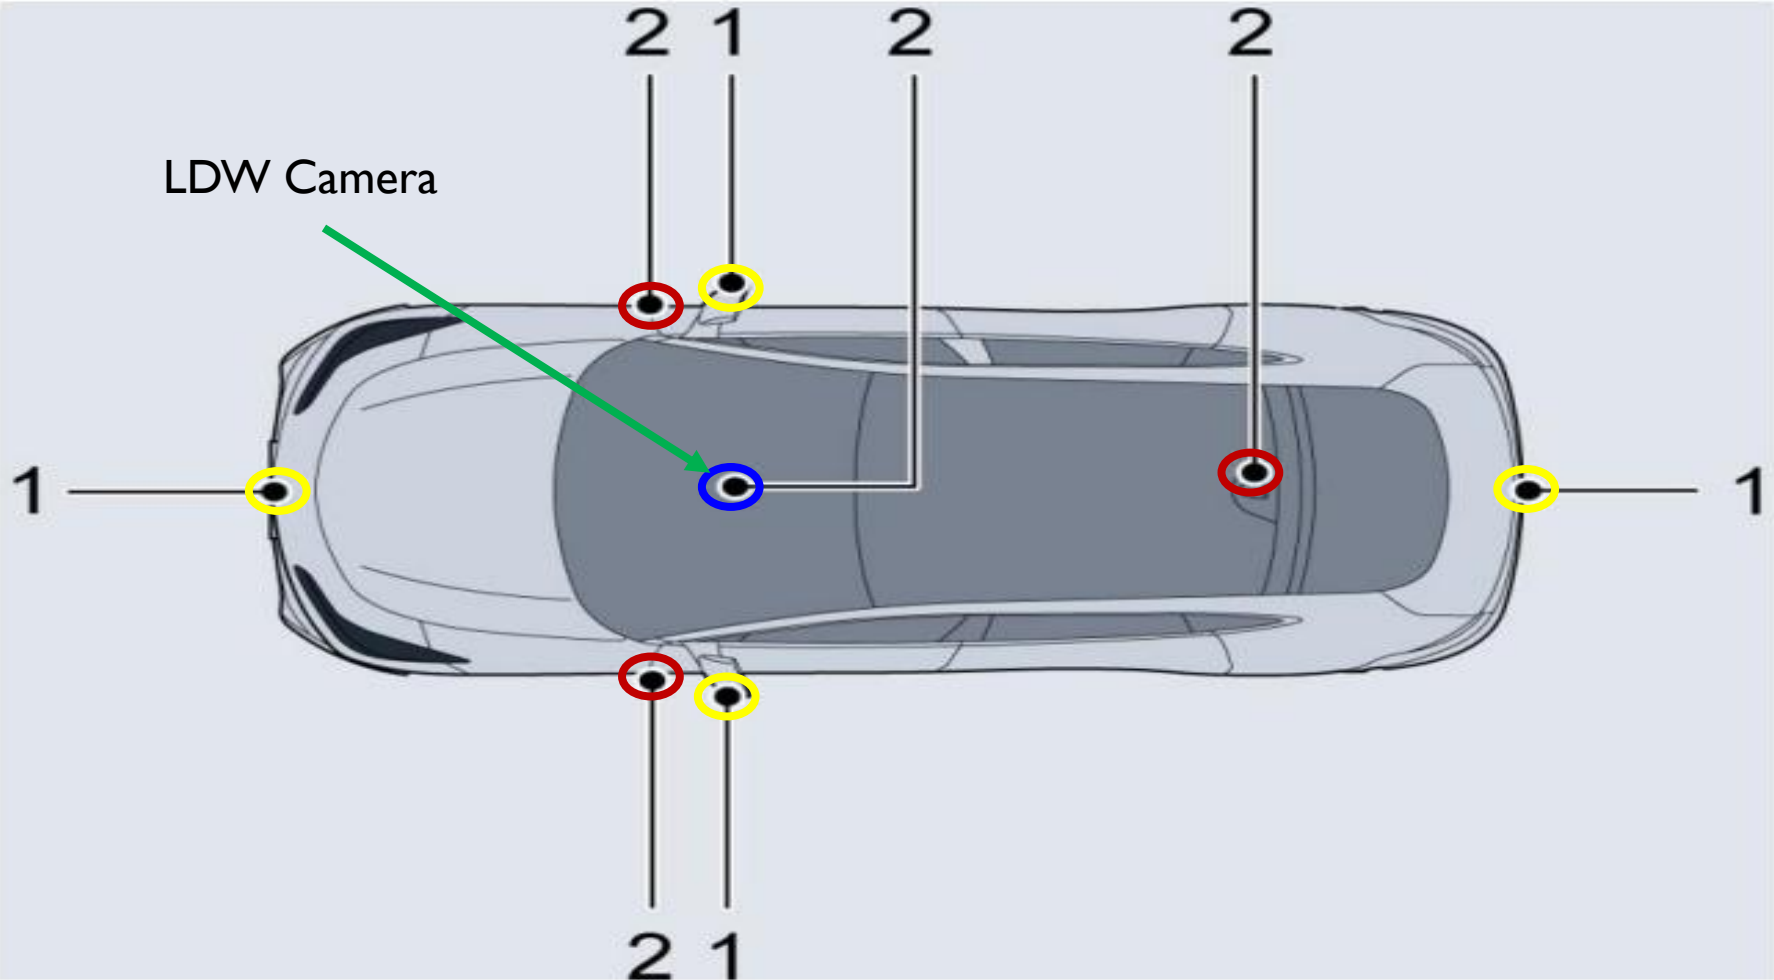

panoramic view: 8.5m long * 5.2m wide.

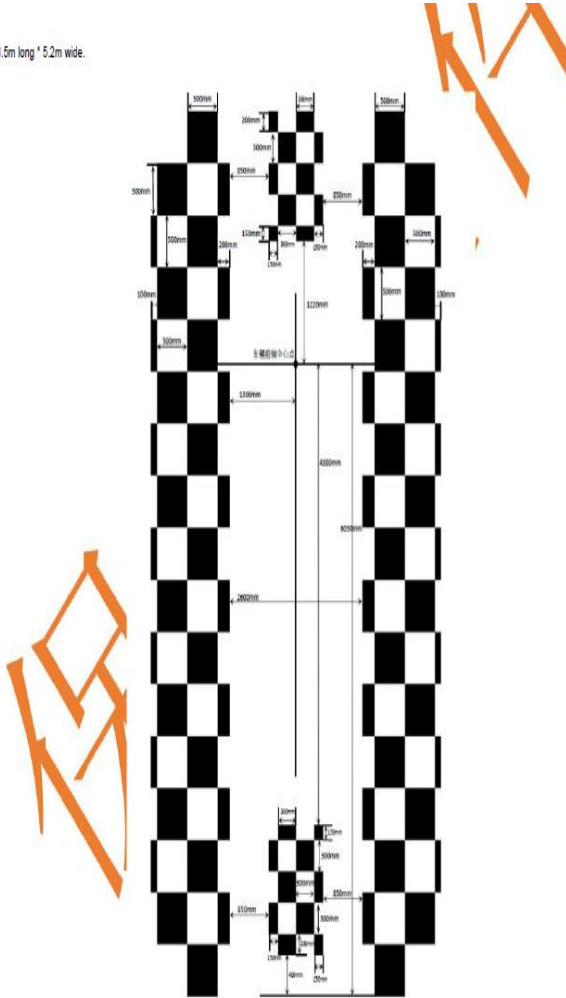

- 1. Surround-view camera
- 2. Periscopic-view camera

AVM Camera



MORRIS GARAGES
Since 1924

THANK YOU