

DrawDiff Comparison Report

Part number: P-001 | Job: af2a6b15-69e6-45db-937c-0a09c2c7cdb9 | Generated: 2026-05-05T01:26:42+00:00

Summary

0 Critical	7 Significant	1 Minor	0 Uncertain	6 Views compared
---------------	------------------	------------	----------------	---------------------

Title Block

Field	Original	Revised
part_number		
revision	TS	
material		
tolerance		
drawn_by		
date		

Revision Block

Added in revised

No revision entries on revised drawing.

Removed from original


No revision entries on original drawing.

Annotated Drawings


Severity: Critical Significant Minor Uncertain

Sheet 1 — boxes mark views with detected changes.

Original

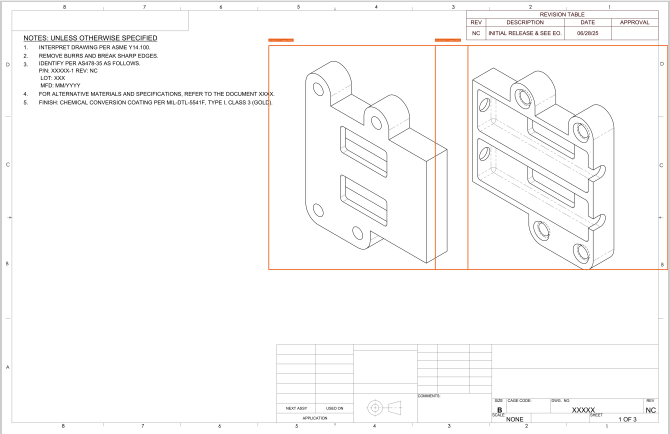


Revised

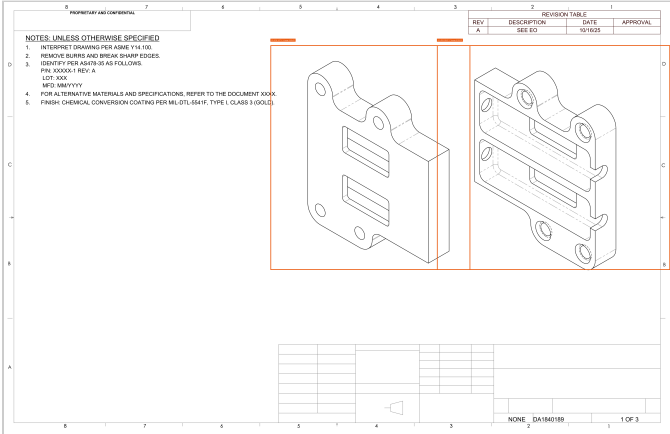


Sheet 2 — boxes mark views with detected changes.

Original

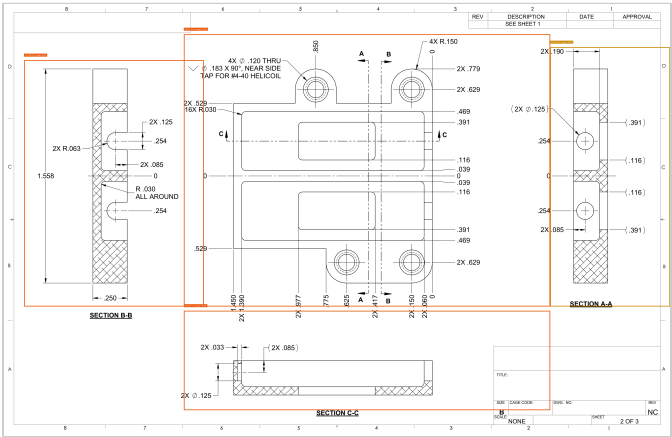

Revised

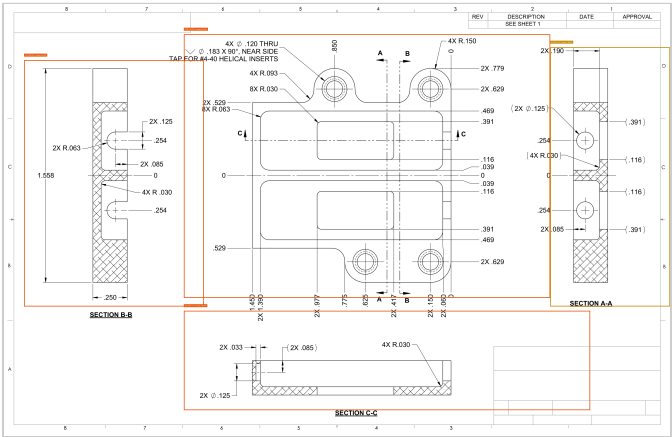

View-by-view Changes


title_block [TITLE_BLOCK]

Severity	Field	Zone	Original	Revised	Conf.	Rationale
SIGNIFICANT	revision	Title Block	TS	—	1.00	title_block.revision changed from 'TS' to None

revision_block [REVISION_BLOCK]


No textual changes recorded for this view.

ISO_VIEW_LEFT [MATCHED]

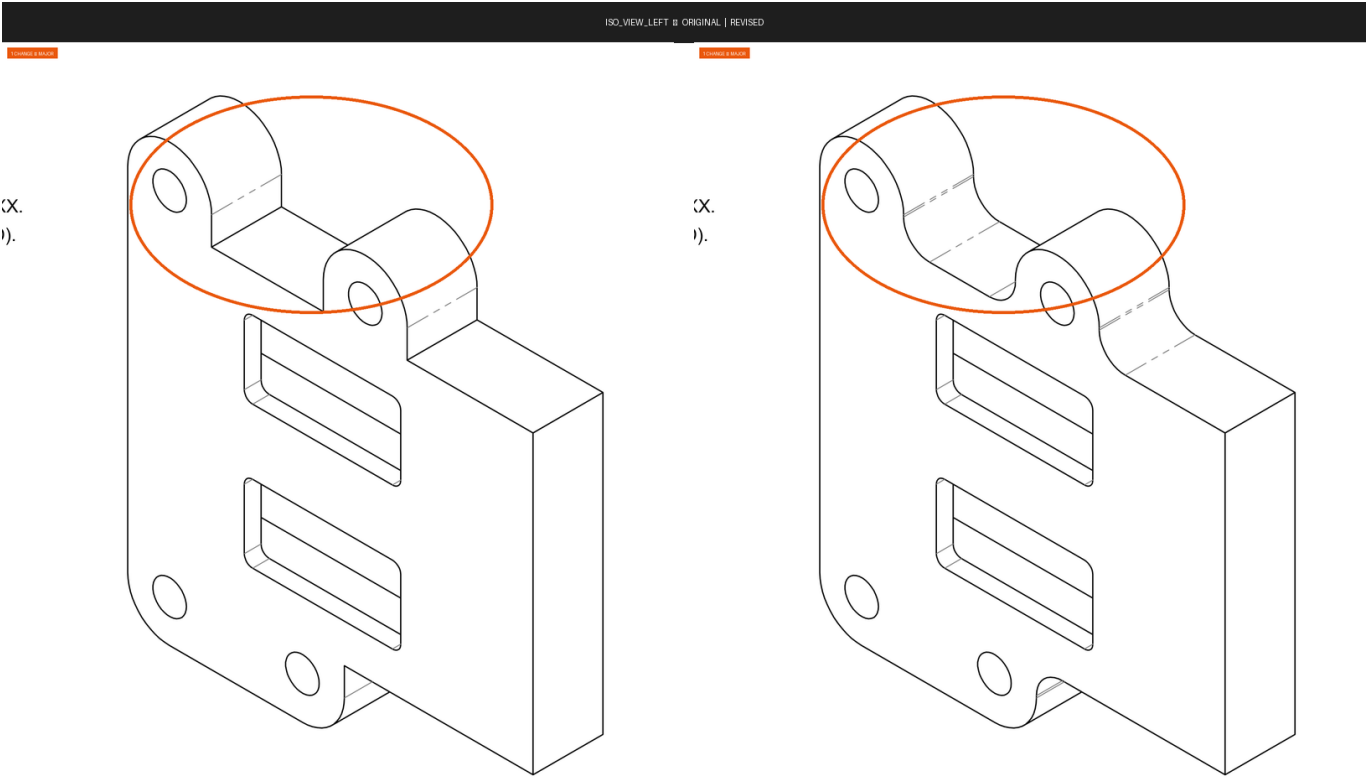


Severity	Field	Zone	Original	Revised	Conf.	Rationale
SIGNIFICANT	geometry	A4	Top hinge/ bracket arm has a flat/straight upper profile with a sharp step transition to the cylindrical boss	Top hinge/bracket arm has a curved/ radiused upper profile with smooth fillet transitions connecting to the cylindrical boss	0.82	The upper bracket arm geometry changed from a flat-topped stepped profile to a smoothly curved radiused profile, indicating a design change to the bracket lug that affects stress concentration and potentially fit/function.

ISO_VIEW_RIGHT [MATCHED]

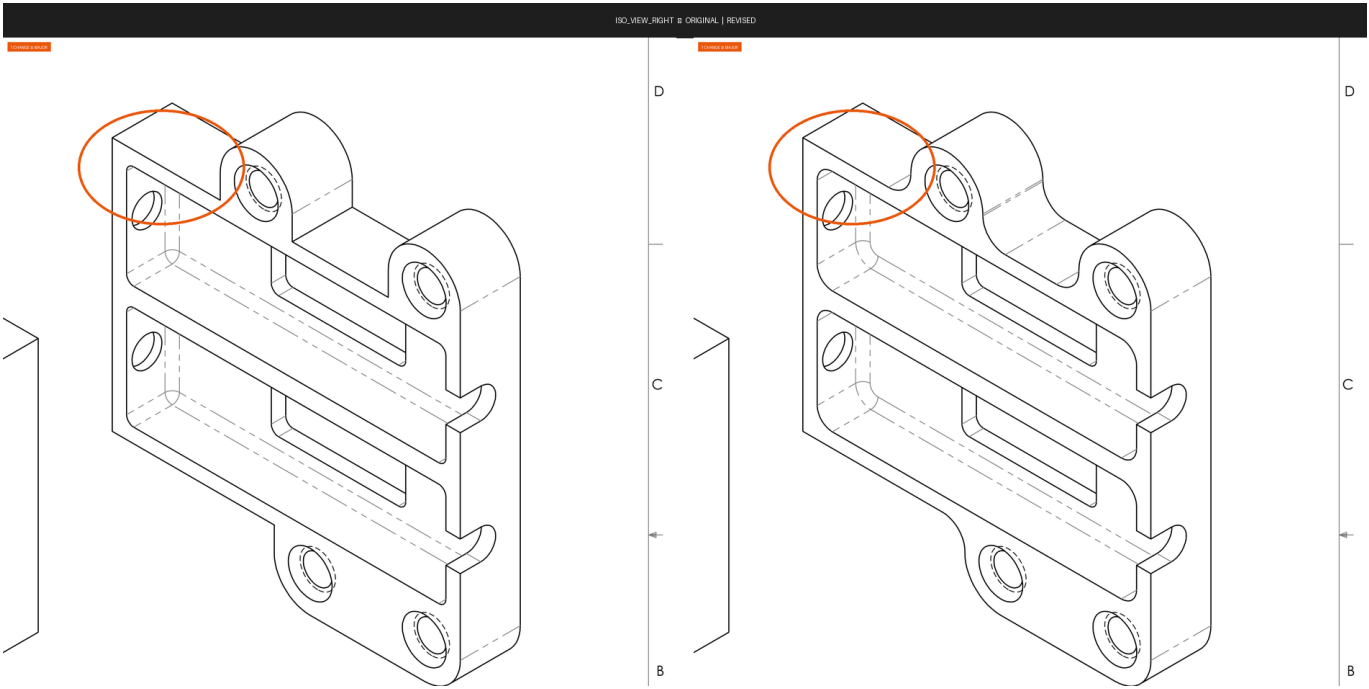


Severity	Field	Zone	Original	Revised	Conf.	Rationale
SIGNIFICANT	geometry	A3	Square/sharp upper-left corner on front face top edge	Chamfered/ rounded upper-left corner on front face top edge	0.72	The top-left corner of the front face plate appears to have a chamfer or fillet added in the revised view, changing the geometry from a sharp corner to a relieved corner.

SECTION B-B [MATCHED]

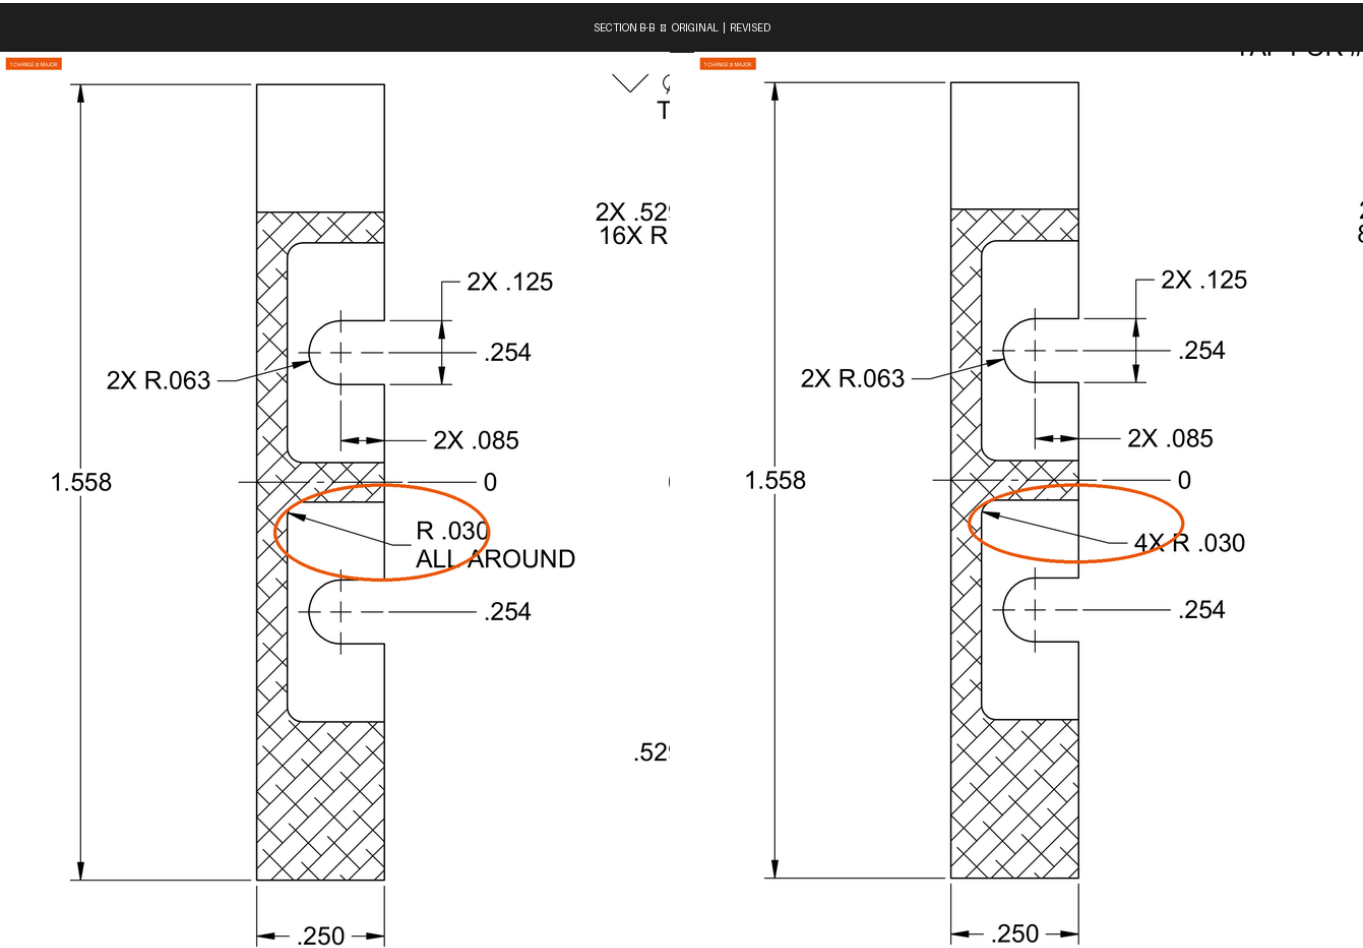


Severity	Field	Zone	Original	Revised	Conf.	Rationale
SIGNIFICANT	callout	B7	R .030 ALL AROUND	4X R .030	0.92	The radius callout changed from 'R .030 ALL AROUND' to '4X R .030', replacing the all-around specification with an explicit count of 4 instances, which changes the scope and interpretation of where the radius applies.

FRONT_VIEW [MATCHED]

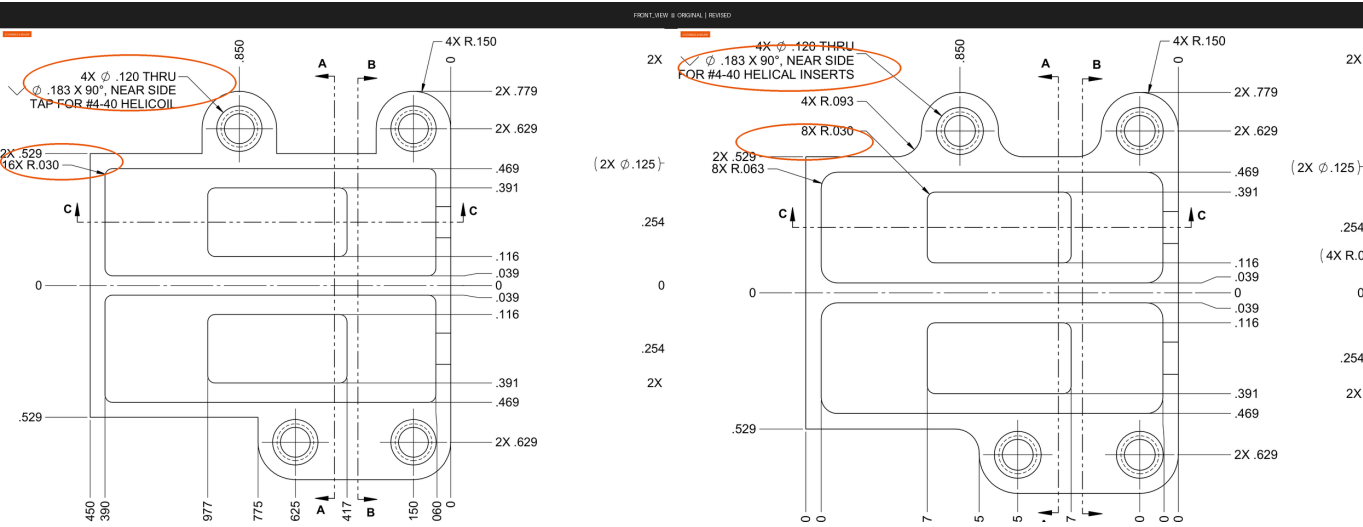


Severity	Field	Zone	Original	Revised	Conf.	Rationale
SIGNIFICANT	note	A6	TAP FOR #4-40 HELICOIL	FOR #4-40 HELICAL INSERTS	0.92	The thread insert callout wording changed from 'TAP FOR #4-40 HELICOIL' to 'FOR #4-40 HELICAL INSERTS', which alters the manufacturing instruction and supplier/brand specification for the threaded inserts.
SIGNIFICANT	annotation	A6	16X R.030	8X R.030	0.90	The count of R.030 corner radii changed from 16X to 8X, indicating a reduction in the number of these radii applied to the part geometry.

SECTION A-A [MATCHED]

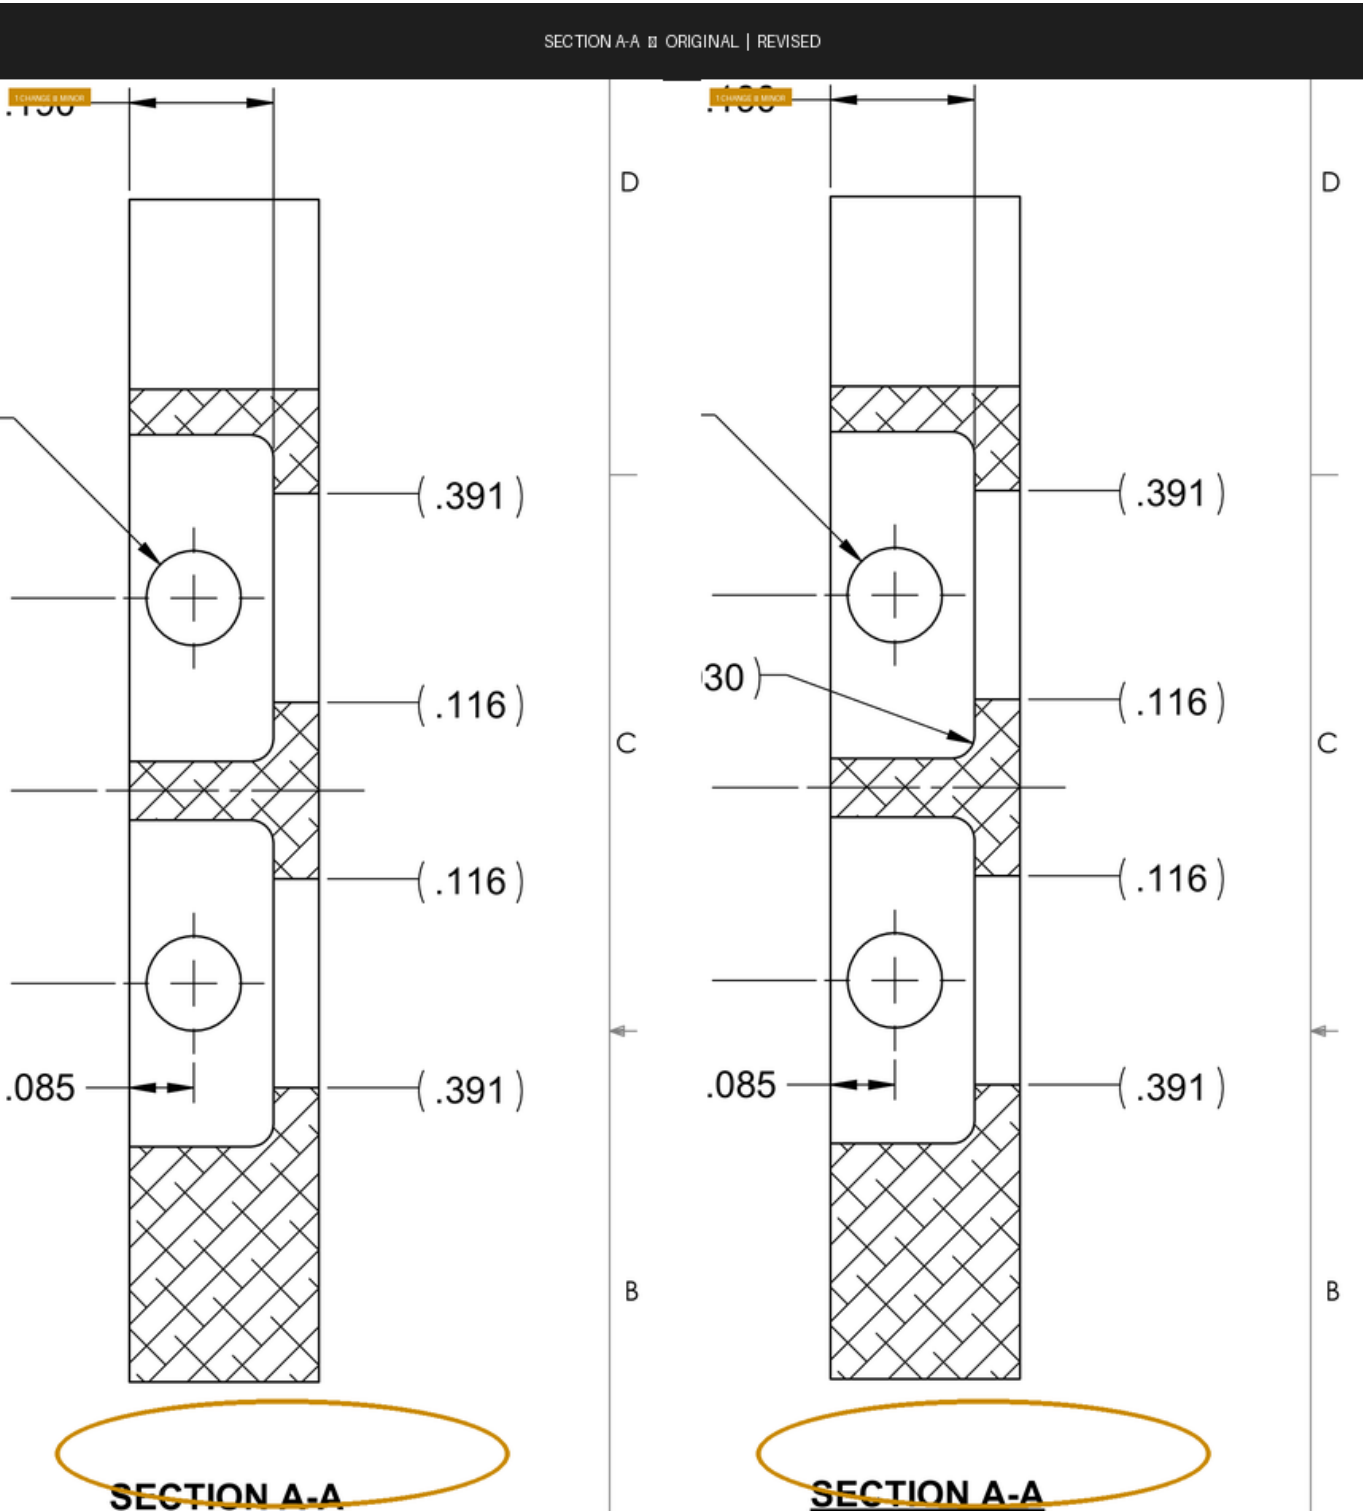

Severity	Field	Zone	Original	Revised	Conf.	Rationale
MINOR	annotation	C1	SECTION A-A (no underline)	SECTION A-A (underlined)	0.82	The view label 'SECTION A-A' appears underlined in the revised drawing but was not underlined in the original, representing a drafting/documentation formatting change.

SECTION C-C [MATCHED]

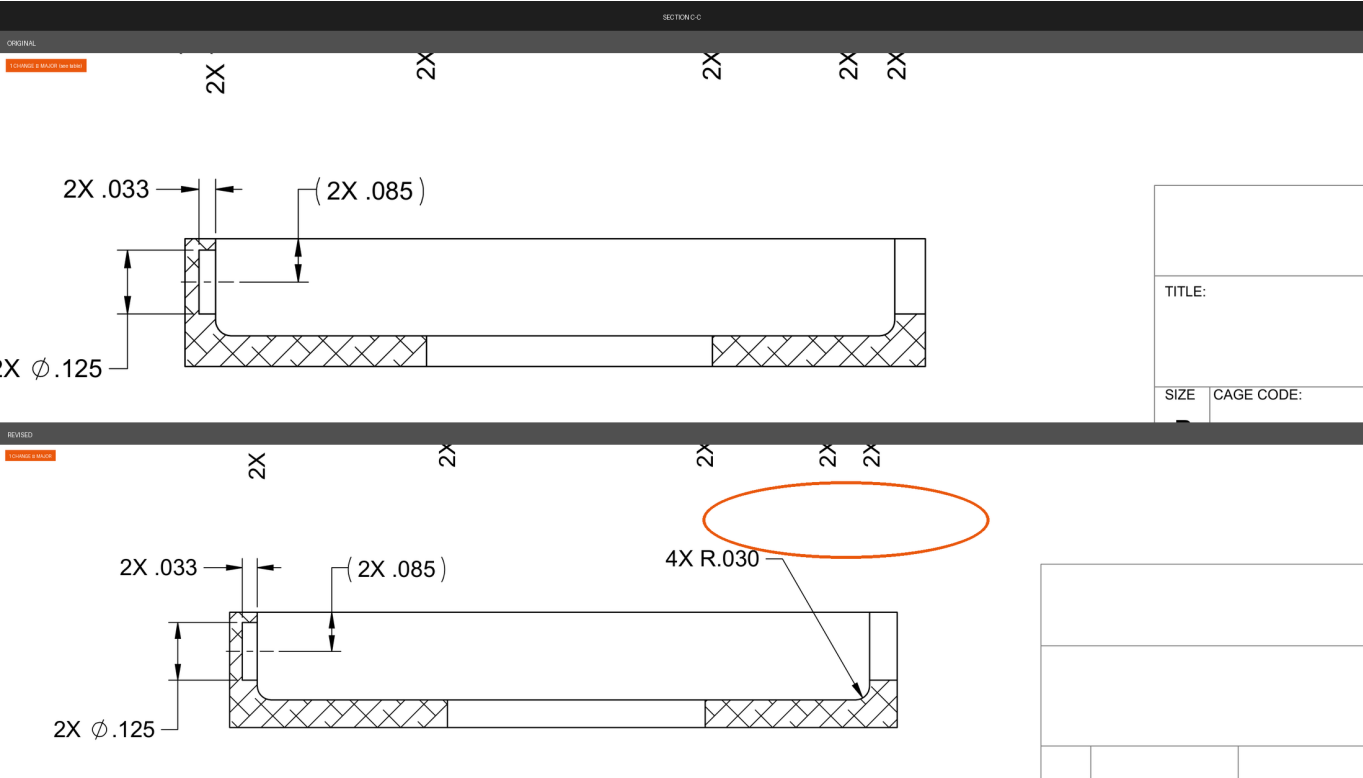

Severity	Field	Zone	Original	Revised	Conf.	Rationale
SIGNIFICANT	callout	D3	—	4X R.030	0.92	A new radius callout '4X R.030' has been added in the revised drawing, specifying corner radii that were not previously called out, which affects manufacturing and part geometry.

Legend

- **CRITICAL** — Affects structural integrity, safety, interchangeability, or regulatory compliance.
 - **SIGNIFICANT** — Affects manufacturing scope, cost, or lead time. No safety risk but requires re-planning.
 - **MINOR** — Clarity, formatting, or documentation change. No manufacturing impact.
 - **UNCERTAIN** — Confidence below 0.65. Requires human review.
- ⚠ **AI-generated** — requires human verification before release to manufacturing.