

VEGA SERIES™

TOPCON Cell Technology

POWER OUTPUT RANGE

605Wp – 630W

MODULE CODE
BVM8611M-XXXR-H-HC-BF-DG

PV MODULE TECHNOLOGY

Bifacial I Double Glass

PV MODULE EFFICIENCY


23.32% Max Module Efficiency
Power Tolerance 0~+5W

PV MODULE POWER RANGE

605W | 610W | 615W | 620W | 625W | 630W

PV MODULE DESIGN

Silver Frame I Double Glass
Split Module Design

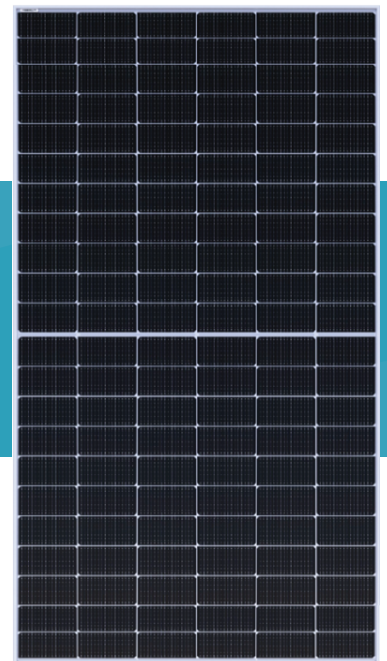

PRODUCT FEATURES + BENEFITS



Design to Perform

- High energy yield and faster ROI
- High efficiency up to 23.32%
- Improved incident angle modifier
- Improved low irradiance performance
- Lower temperature coefficient -0.30%/K



Build to Last

- Resistance to harsh environments
 - Wind loads up to 2400Pa
 - Snow loads up to 5400Pa
 - Hail impact size 25mm
- Lower impact from temperature efficiency behavior
 - Anti-LeTID performance
 - Anti-PID performance
 - Backed by 3rd party testing validation
- Multi-busbar, half-cut cells to enhance
 - Micro crack resistance
 - Impact of inter-row resistance
 - Improve current flow



Best Value

- TOPcon cell technology with 80±5% bifaciality
- Lower Balance of system cost (BOS)
- Reduced levelized cost of energy (LCOE)
- Faster return on investment (ROI)

PRODUCT WARRANTY


Warranty Terms

12 Year product warranty
30 Year linear product warranty

Power Degradation

First year power degradation no more than 1%
Subsequent annual power degradation no more than 0.4%

■ Output Linear Warranty
■ Standard Warranty

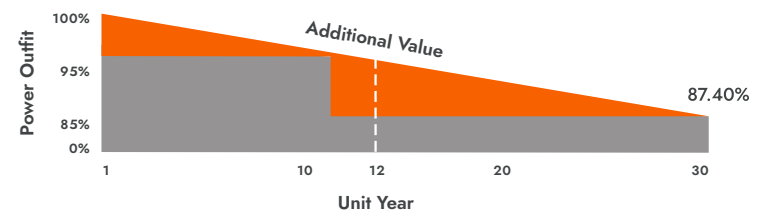

PRODUCT CERTIFICATIONS & TESTS

UL 61730 | IEC 61215 | IEC 61730 | CE Listed

IEC 62716, IEC 61701 Ammonia, Salt mist corrosion test

IEC TS 62804-1, IEC 60068-2-68PID test, Dust and Sand test

IEC 61730-2 (UL790) Fire Class C

Management System I Certificates

ISO 9001 | Quality management system

ISO 14001 | Environmental management system

ISO 45001 | Occupational health and safety management system

*Please contact Boviet Solar representative for a full list of certificates according to local requirements and PV module product type.

A RELIABLE, TRUSTED, LONG-TERM INDUSTRY PARTNER

BloombergNEF

Tier 1
PV Module
Manufacturer

PVEL member of group **kiwa**

PVEL PV Module
Reliability Scorecard
Top Performer

BLACK & VEATCH

B&V Successful
Independent
Manufacturing Assessment



Supply chain
traceability
protocol



Environmental,
Social, & Governance
Program



Made in
Vietnam since
2013

ELECTRICAL CHARACTERISTICS | STC

Maximum Power (Pmax)	605W	610W	615W	620W	625W	630W
Maximum Power Current (Imp)	14.78A	14.83A	14.88A	14.93A	14.98A	15.03A
Maximum Power Voltage (Vmp)	40.94V	41.14V	41.34V	41.54V	41.73V	41.92V
Short Circuit Current (Isc)	15.79A	15.84A	15.89A	15.94A	15.99A	16.07A
Open Circuit Voltage (Voc)	48.05V	48.25V	48.45V	48.65V	48.85V	49.05V
Module Efficiency	22.40%	22.58%	22.77%	22.95%	23.14%	23.32%
Power Tolerance	0~+5W	0~+5W	0~+5W	0~+5W	0~+5W	0~+5W

STC: AM1.5 Irradiance 1000W/m, 25° C

ELECTRICAL CHARACTERISTICS | NOCT

Maximum Power (Pmax)	605W	610W	615W	620W	625W	630W
Maximum Power (Pmax)	457.50W	461.28W	465.06W	468.84W	472.62W	476.40W
Maximum Power Current (Imp)	11.99A	12.03A	12.07A	12.11A	12.15A	12.19A
Maximum Power Voltage (Vmp)	38.16V	38.35V	38.54V	38.72V	38.90V	39.08V
Short Circuit Current (Isc)	12.69A	12.73A	12.77A	12.81A	12.85A	12.91A
Open Circuit Voltage (Voc)	45.02V	45.20V	45.39V	45.58V	45.77V	45.96V

NOCT: AM 1.5 Irradiance 800W/m², 20° C, Wind speed 1m/s

MECHANICAL CHARACTERISTICS

Solar Cell	Monocrystalline I TOPCon I 210x182mm Cell Half-cut cell I 16 Busbar I 132 cell I (6x18) pieces in series
Solar Modules	Bifacial I Silver Frame I Double Glass Dimensions: 93.78x 44.65 x 1.3 inch I 2382 x 1134 x 33 mm Weight: 71.65 lb.±5% I 32.5 kg ±5%
Module Front Glass	2.0 mm(0.079in) High transparency, low iron, AR coated Tempered Glass
Module Frame	Silver Frame I 33 mm I 1.3 inch Aluminum Alloy Frame I Anodized I Ultra Strong
Module Junction Box	IP68 rated I 3 bypass diodes I Split junction box design
Module Output Cable	4mm² I Length:(+)-350mm,(-)350mm
Module Connector	JM 608
Module Back Glass	2.0 mm(0.079in) AR coated Semi-Tempered Glass
Module Encausulant	POE/EVA/EPE
Module Fire Type	Type 29 Fire rated

PACKING INFORMATION

Pieces per pallet:	33 PCS
Pallets per container (40HQ):	16 Pallets
Pieces per container (40HQ):	528 PCS
Pallet Weight:	1122.5 kg (2474.68 lb)
Pallet Dimension:	95.04 x 44.69 x 49.49 inch (2414 x 1135 x 1257 mm)

THERMAL CHARACTERISTICS

Pmax Temperature Coefficient	-0.30%/K
Voc Temperature Coefficient	-0.25%/K
Isc Temperature Coefficient	+0.046%/K

NOCT 113±35.6°F


MAXIMUM RATING

Operating Temperature	-40°F~185°F
Maximum Series Fuse Rating	30A
Maximum System Voltage	1500V DC
Bifacial Ratio	80±5%

BIFACIAL OUTPUT-BACKSIDE POWER GAIN


10%	Pmax(W)	665.5W	671W	676.5W	682W	687.5W	693W
	Module efficiency (%)	24.64%	24.84%	25.04%	25.25%	25.45%	25.66%
20%	Pmax(W)	726W	732W	738W	744W	750W	756W
	Module efficiency (%)	26.88%	27.10%	27.32%	27.54%	27.77%	27.99%

PV Module: Mechanical Drawing

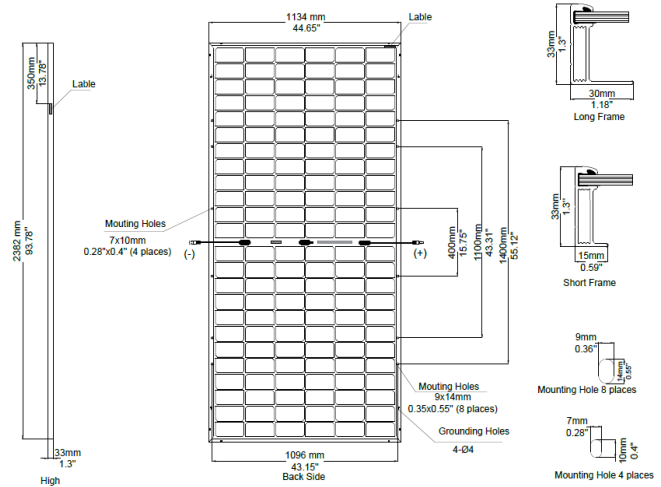

PV Module: IV Curve

Irradiance: AM 1.5, 1000W/m² (630)W

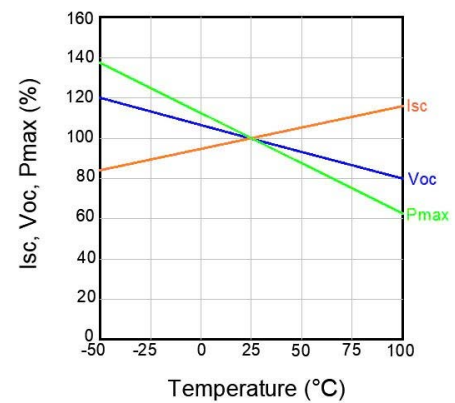

PV Module: IV Curve

I-V Curves at Different Irradiances (630W)
Test Temperature: 25°C

