

INL1-4: Distribution systems (COMSOL)

Pipe	Outer Diameter (cm)	Inner Diameter (cm)
Main	7.61	7.21
A	7	6.6
B	7	6.6
C	7	6.6
D	5.4	5.1
E	5.4	5.1
F	3.5	3.2

Table 1: Chosen diameters of the Copper Pipes



Mass flow rate of pump kg/s

Compute

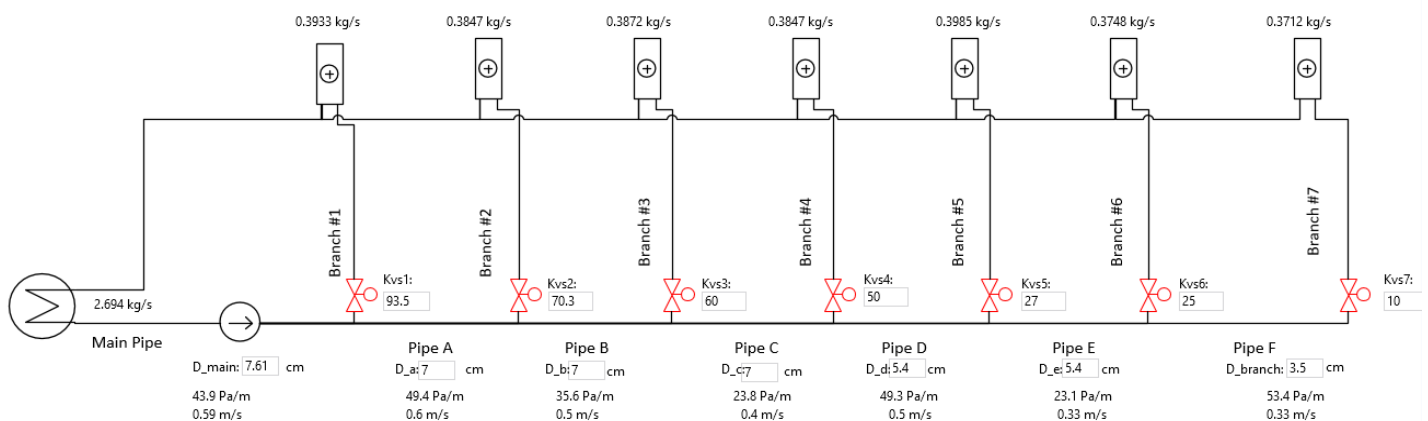


Fig1: Test Application in the COMSOL Application Builder

Branch	Mass Flow Rate (kg/s)	Loss Coefficient
1	0.3933	93.5
2	0.3847	70.3
3	0.3872	60
4	0.3847	50
5	0.3985	27
6	0.3748	25
7	0.3712	10

Table 2: Balance value settings from COMSOL Multiphysics Simulations