

DOUBLE INLET BACKWARD CURVED IMPELLER 250 SERIES




Technical Specification*

TYPE	I/P SUPPLY	AMPS (A)	WATTS (W)	RPM	AIRFLOW		STATIC-PR (mm-wc)	dBA	CAP. µf	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
					(CMH)	(CFM)					
SDB 250 BC S2	230V, 1Ø, 50Hz	2.0	450	2750	1600	941	85	85	12.5	60	15
SDB 250 BC T2	415V, 3Ø, 50Hz	0.75	400	2750	1600	941	85	85	..	60	15

*Tolerance ±5% on Specified values

Dimensional Drawing

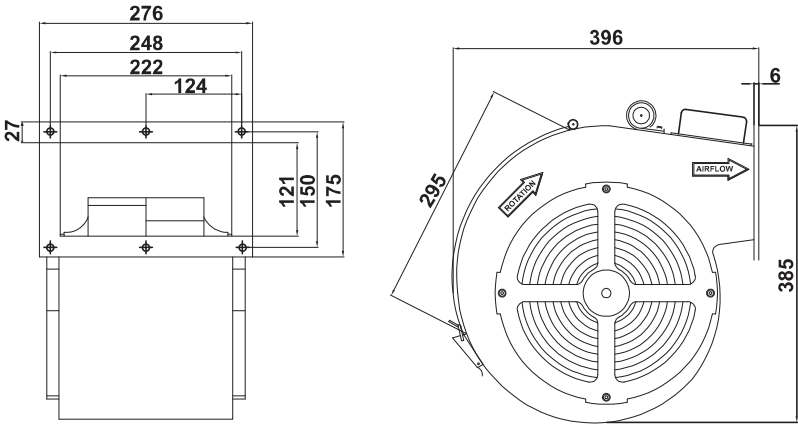

Performance Chart

