

CONVENTIONAL DOUBLE INLET DOUBLE BLOWER




Technical Specification*

TYPE	I/P SUPPLY	AMPS (A)	WATTS (W)	RPM	AIRFLOW		STATIC-PR	dBA	CAP. µf	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
					(CMH)	(CFM)	(mm-wc)				
SDB 75 S2	230V, 1Ø, 50Hz	2.40	520	2750	2500	1470	50	75	8	60	9

*Tolerance ±5% on Specified values

Dimensional Drawing

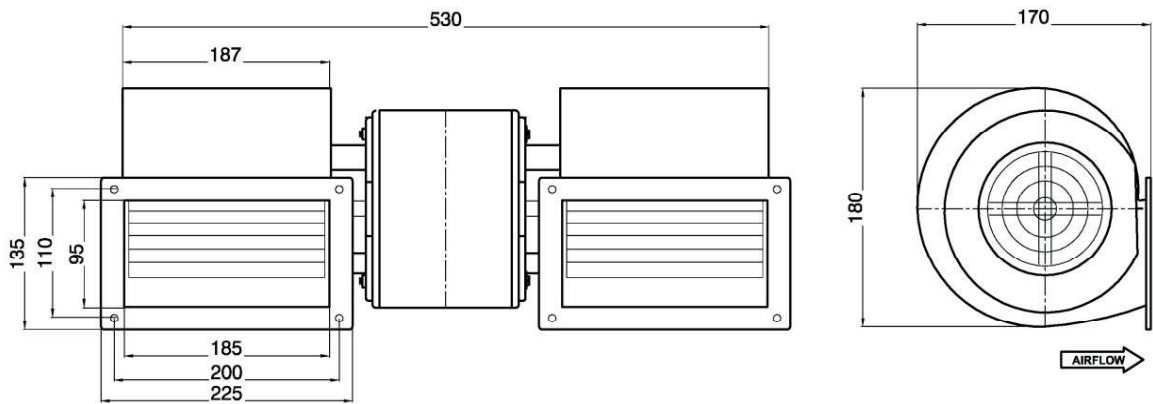

Performance Chart

