


INDUCTION MOTORS

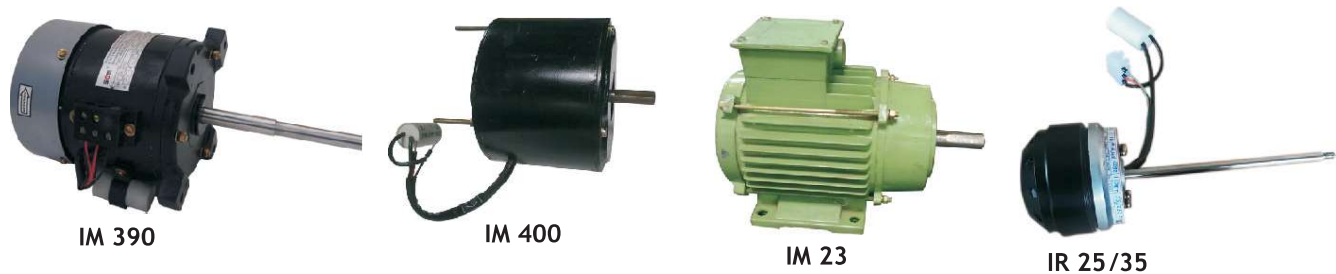


Technical Specification*


TYPE	I/P SUPPLY	AMPS (A)max	FULL LOAD WATTS (W)	RPM	CAP. µf	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
IM 390 S4	230V, 1Ø, 50Hz	0.5	150	1400	4	60	6
IM 390 T4	415V, 3Ø, 50Hz	0.4	150	1400	..	60	6
IM 400 S4	230V, 1Ø, 50Hz	0.65	165	1450	3.15	60	6.5
IM 23 S4	230V, 1Ø, 50Hz	3.0	950	1450	12.5	60	8.5
IM 23 S2	230V, 1Ø, 50Hz	7.0	1500	2900	25	60	8.2
IR 25 SS	230V, 1Ø, 50Hz	0.45	90	2600	2	60	2.2
IR 35 SS	230V, 1Ø, 50Hz	0.60	120	2800	4	60	3.2

*Tolerance ±5% on Specified values


Product Drawing

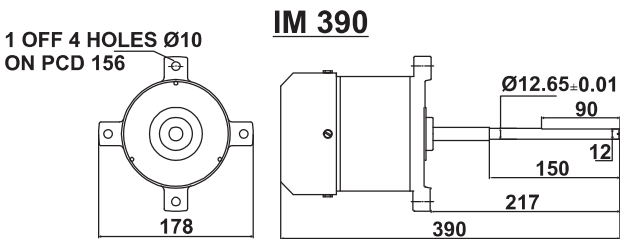


IM 390

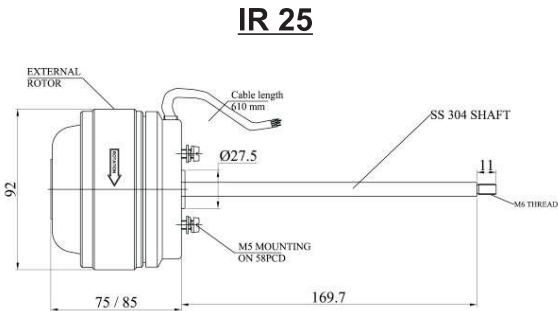

IR 25

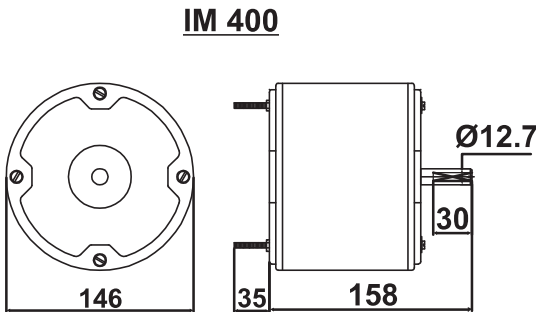

IM 400

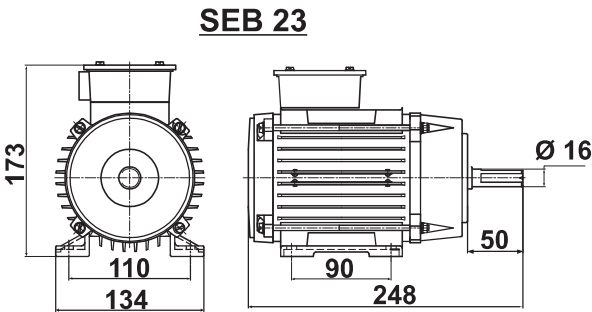

SEB 23