

INLINE DUCT FAN



Technical Specification*


TYPE	I/P SUPPLY	AMPS (A)	WATTS (W)	RPM	AIRFLOW		STATIC-PR (mm-wc)	dBA	CAP. μf	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
					(CMH)	(CFM)					
SID 100 S2	230V, 1Ø, 50Hz	0.35	80	2600	300	176	30	52	2	60	3.5
SID 100 S4	230V, 1Ø, 50Hz	0.3	70	1400	175	103	16	52	2	60	3.5
SID 150 S2	230V, 1Ø, 50Hz	0.45	120	2600	650	382	38	54	2.5	60	4.5
SID 150 T2	415V, 3Ø, 50Hz	0.17	85	2600	650	382	38	56	..	60	4.5
SID 200 S2	230V, 1Ø, 50Hz	0.6	150	2600	1100	647	50	60	4	60	6
SID 200 T2	415V, 3Ø, 50Hz	0.3	150	2500	1120	659	50	60	..	60	6
SID 250 S2	230V, 1Ø, 50Hz	0.65	160	2650	1600	941	55	63	5	60	6
SID 250 T2	415V, 3Ø, 50Hz	0.30	155	2500	1500	882	52	62	..	60	6.2

*Tolerance ±5% on Specified values

Dimensional Details

TYPE	A	B	C	D
SID 100 S2/S4	97	320	30	240
SID 150 S2/T2	147	360	30	250
SID 200 S2/T2	197	404	35	250
SID 250 S2	247	404	35	260

Dimensional Drawing

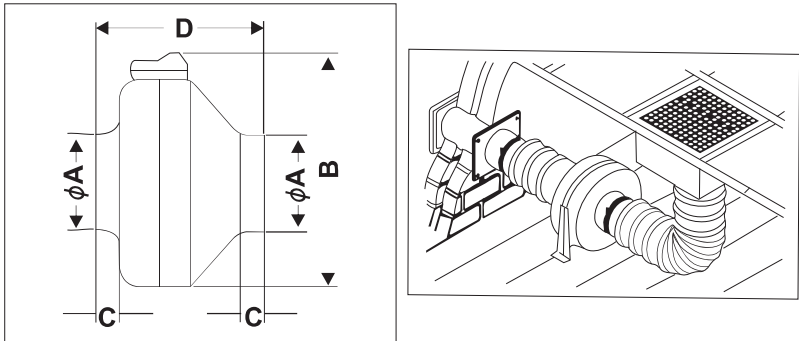

Performance Chart

