

DOUBLE INLET FORWARD CURVED IMPELLER 133 SERIES





Technical Specification*

TYPE	I/P SUPPLY	AMPS (A)	WATTS (W)	RPM	AIRFLOW		STATIC-PR (mm-wc)	dBA	CAP. μf	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
					(CMH)	(CFM)					
SDB 133 T4	415V, 3Ø, 50Hz	0.38	100	1450	550	324	30	55	..	60	4.2
SDB 133 S2/35	230V, 1Ø, 50Hz	0.80	180	2300	825	485	44	60	3.15	60	4.2
SDB 133 S2/25	230V, 1Ø, 50Hz	0.5	140	1750	620	365	38	55	2.5	60	4.3
SDB 133 S4	230V, 1Ø, 50Hz	0.25	60	1400	500	295	28	55	2.0	60	4.2
SDB 133 T2	415V, 3Ø, 50Hz	0.25	175	2450	850	500	45	60	..	60	3.8

*Tolerance ±5% on Specified values

Dimensional Drawing

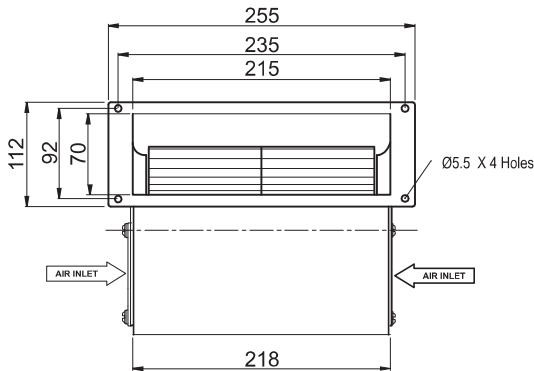

Performance Chart

