

DOUBLE INLET FORWARD CURVED IMPELLER 150 SERIES




Technical Specification\*

| TYPE       | I/P SUPPLY     | AMPS (A) | WATTS (W) | RPM  | AIRFLOW |       | STATIC-PR (mm-wc) | dBA | CAP. µf | ADMISSIBLE AMBIENT TEMP | WEIGHT Kg |
|------------|----------------|----------|-----------|------|---------|-------|-------------------|-----|---------|-------------------------|-----------|
|            |                |          |           |      | (CMH)   | (CFM) |                   |     |         |                         |           |
| SDB 150 S2 | 230V, 1Ø, 50Hz | 2        | 450       | 2700 | 1200    | 706   | 50                | 76  | 12.5    | 60                      | 8.5       |
| SDB 150 T2 | 415V, 3Ø, 50Hz | 0.75     | 430       | 2600 | 1200    | 706   | 50                | 76  | ..      | 60                      | 8.5       |
| SDB 150 S4 | 230V, 1Ø, 50Hz | 0.4      | 100       | 1440 | 620     | 365   | 14                | 61  | 4       | 60                      | 8.5       |
| SDB 150 T4 | 415V, 3Ø, 50Hz | 0.65     | 130       | 1450 | 620     | 365   | 14                | 61  | ..      | 60                      | 8.5       |

\*Tolerance ±5% on Specified values

Dimensional Drawing

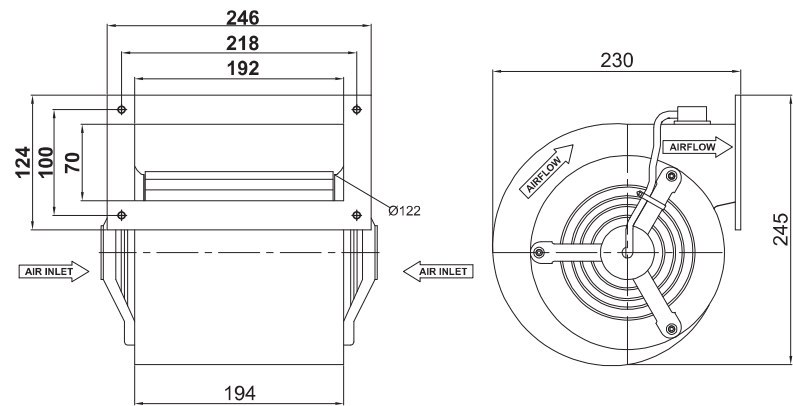

Performance Chart

