

DOUBLE INLET FORWARD CURVED IMPELLER 180 SERIES




Technical Specification\*

| TYPE       | I/P SUPPLY     | AMPS (A) | WATTS (W) | RPM  | AIRFLOW |       | STATIC-PR (mm-wc) | dBA | CAP. µf | ADMISSIBLE AMBIENT TEMP | WEIGHT Kg |
|------------|----------------|----------|-----------|------|---------|-------|-------------------|-----|---------|-------------------------|-----------|
|            |                |          |           |      | (CMH)   | (CFM) |                   |     |         |                         |           |
| SDB 180 S2 | 230V, 1Ø, 50Hz | 4.2      | 950       | 2550 | 2150    | 1265  | 70                | 80  | 15      | 60                      | 14        |
| SDB 180 T2 | 415V, 3Ø, 50Hz | 1.25     | 750       | 2550 | 2150    | 1265  | 70                | 80  | ..      | 60                      | 14        |
| SDB 180 S4 | 230V, 1Ø, 50Hz | 1.2      | 260       | 1350 | 1300    | 765   | 22                | 67  | 8       | 60                      | 14        |

\*Tolerance ±5% on Specified values

Dimensional Drawing

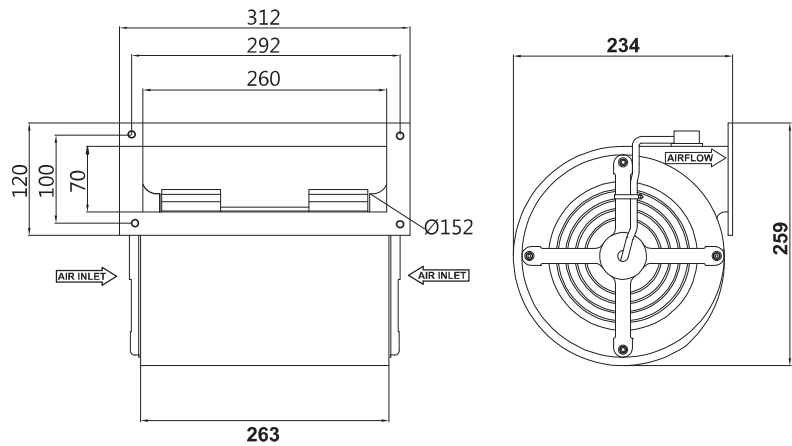

Performance Chart

