


AXIAL FAN EXTERNAL ROTOR PRESS FIT IMPELLER

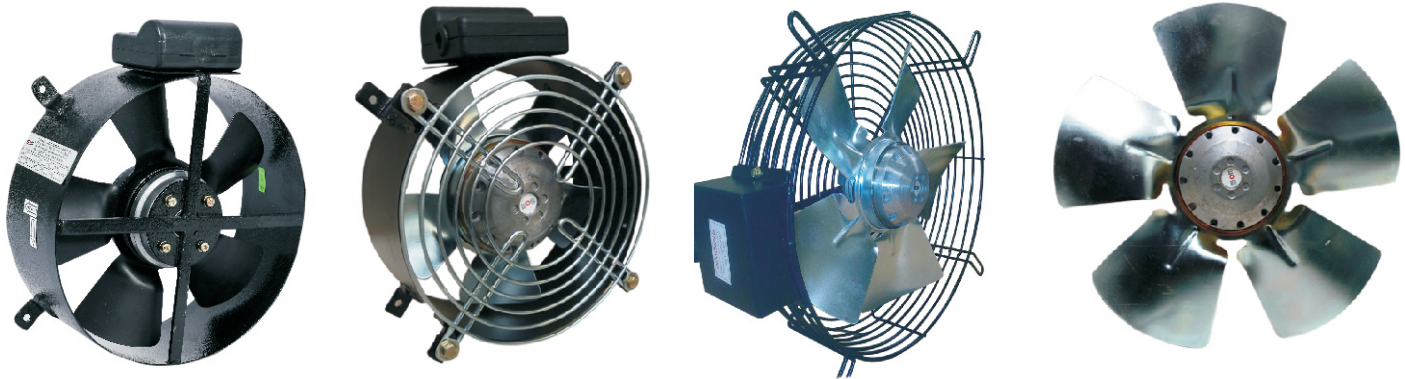

Technical Specification*


TYPE	I/P SUPPLY	AMPS (A)	WATTS (W)	RPM	AIRFLOW		STATIC-PR (mm-wc)	dBA	CAP. μf	Fan Dia D(mm)	Height H(mm)	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
					(CMH)	(CFM)							
CM 130 S2/B2	230V, 1Ø, 50Hz	0.15	25	2850	300	176	16	50	1	128	65	60	1.05
CM 150 S2/B2	230V, 1Ø, 50Hz	0.15	30	2850	350	206	20	52	1.5	148	65	60	1.05
CM 200 S4/B4	230V, 1Ø, 50Hz	0.25	45	1400	425	250	8	50	1.5	197	78	60	2
CM 200 S2/B2	230V, 1Ø, 50Hz	0.3	60	2750	900	529	26	65	2	197	78	60	2.25
6AF3S2/B2	415V, 3Ø, 50Hz	0.17	40	2880	350	206	18	60	..	148	78	60	1.90
8AF 3B4/S4	415V, 3Ø, 50Hz	0.35	50	1400	425	250	8	50	..	197	78	60	2
8AF 3B2/S2	415V, 3Ø, 50Hz	0.2	90	2800	900	529	26	65	..	197	78	60	2
CM 250 S4/B4	230V, 1Ø, 50Hz	0.25	65	1400	850	500	10	50	2.5	248	87	60	2.25
CM 250 S2/B2	230V, 1Ø, 50Hz	0.6	140	2600	1700	1000	35	72	3.15	248	87	60	2.25
10AF 3B2/S2	415V, 3Ø, 50Hz	0.25	130	2650	1700	1000	35	72	..	248	87	60	2.25
10AF 3B4/S4	415V, 3Ø, 50Hz	0.25	80	1475	1000	588	9	50	..	248	87	60	2
CM 300 B4/S4	230V, 1Ø, 50Hz	0.3	75	1400	1750	1029	12	64	3.15	298	88	60	2.5
12AF 3B4/S4	415V, 3Ø, 50Hz	0.30	75	1350	1750	1029	12	64	..	298	88	60	2.5
CM 300 B2/S2	230V, 1Ø, 50Hz	0.7	165	2450	2300	1353	20	65	4	298	88	60	2.5
12AF 3B2/S2	415V, 3Ø, 50Hz	0.30	150	2450	2300	1353	20	73	..	298	88	60	2.5

Note: 'S' indicates Suction type, 'B' indicates Blowing type

*Tolerance +5% on Specified values

PRODUCT DRAWING

Dimensional Drawing

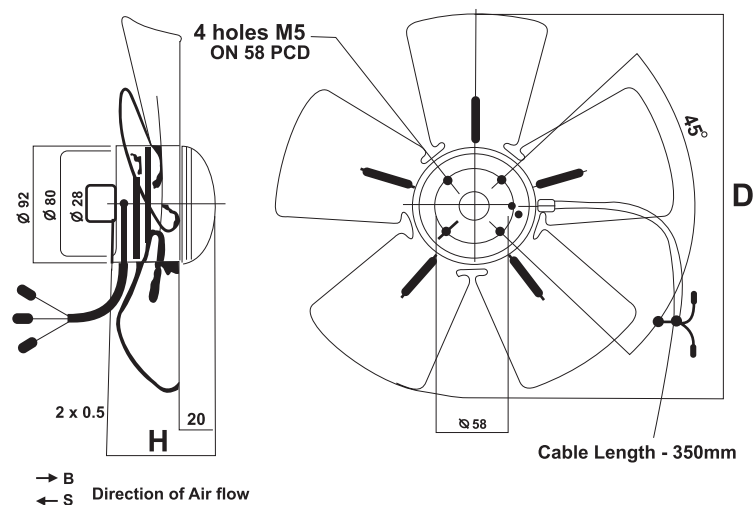

Performance Chart

