


AXIAL FAN EXTERNAL ROTOR RIVETED IMPELLER



Fan with FG

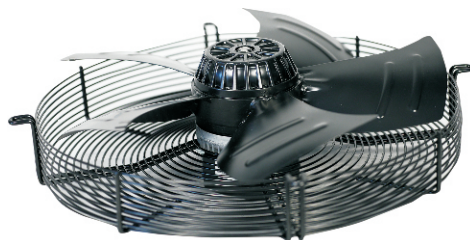

Fan with BG



Fan with Casing

Technical Specification*


TYPE	I/P SUPPLY	AMPS (A)	WATTS (W)	RPM	AIRFLOW (CMH) (CFM)		STATIC-PR (mm-wc)	dBA	CAP. μf	Fan Dia D(mm)	Height H(mm)	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
CM 350 B4/S4	230V, 1Ø, 50Hz	0.75	165	1400	2900	1706	22	64	6	348	110	60	4
CM 400 B4/S4	230V, 1Ø, 50Hz	1	220	1350	4200	2471	26	69	6	398	120	60	4.5
CM 450 B4/S4	230V, 1Ø, 50Hz	1.6	350	1350	5800	3412	28	68	6	446	135	60	5.8
14AF 3B4/S4	415V, 3Ø, 50Hz	0.4	145	1400	2900	1706	22	64	..	348	110	60	4
16AF 3B4/S4	415V, 3Ø, 50Hz	0.5	220	1350	4200	2471	26	69	..	398	120	60	4.5
18AF 3B4/S4	415V, 3Ø, 50Hz	0.6	280	1350	5800	3412	28	68	..	446	135	60	5.7
20AF 3S4	415V, 3Ø, 50Hz	0.85	420	1350	6800	4000	13	70	..	496	125	60	9.5

*Tolerance ±5% on Specified values



PRODUCT DRAWING

Dimensional Drawing

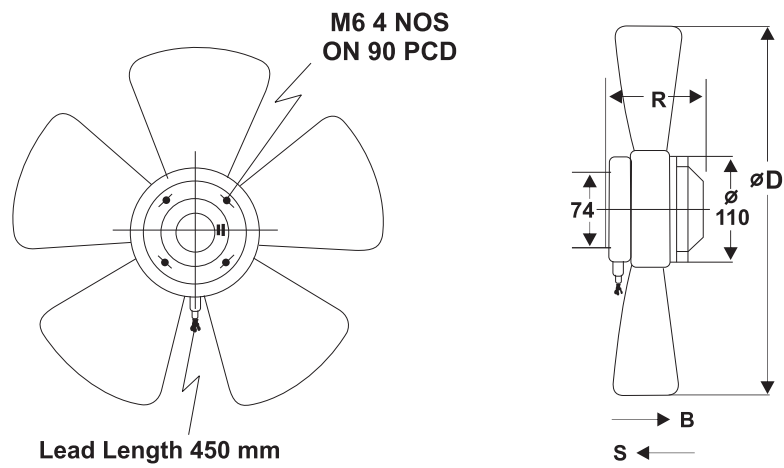

Performance Chart

