


CONVENTIONAL DOUBLE INLET DOUBLE BLOWER

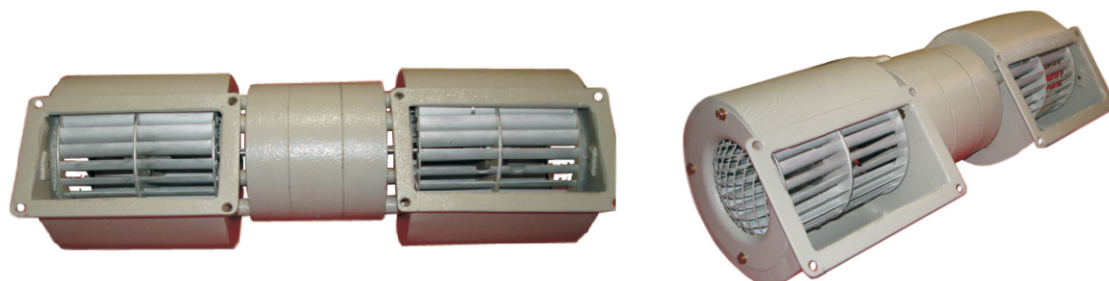

Technical Specification*

TYPE	I/P SUPPLY	AMPS (A)	WATTS (W)	RPM	AIRFLOW		STATIC-PR (mm-wc)	dBA	CAP. μ f	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
SDB 53 S2	230V, 1 ϕ , 50Hz	0.70	165	2800	800	471	40	77	5	60	4.5
SDB 53 S4	230V, 1 ϕ , 50Hz	0.40	75	1400	350	206	15	60	2	60	4.5
SDB 55 S2	230V, 1 ϕ , 50Hz	0.80	190	2800	1150	676	40	75	5	60	5
SDB 60 S2	230V, 1 ϕ , 50Hz	1.0	235	2500	1250	735	45	80	5	60	5.3


*Tolerance $\pm 5\%$ on Specified values

Dimensional Details


TYPE	A	B	C	D	E	F	G	H	I	J
SDB 53 S2	127	105	110	50	96	72	342	145	140	148
SDB 53 S4	122	98	110	50	96	72	342	145	140	148
SDB 55 S2	162	96	148	84	135	70	420	145	139	145
SDB 60 S2	125	120	110	50	96	94	345	150	160	170

Note: ALL DIMENSIONS ARE IN mm


Dimensional Drawing

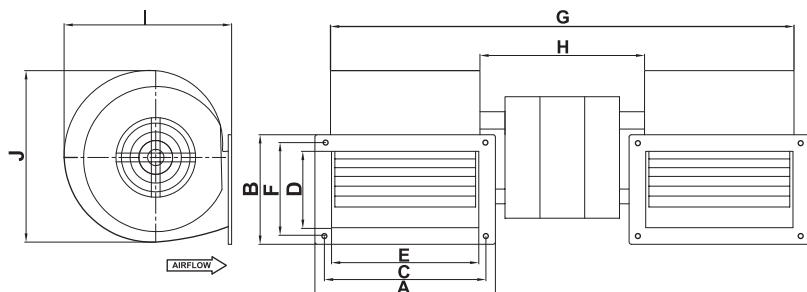

Performance Chart

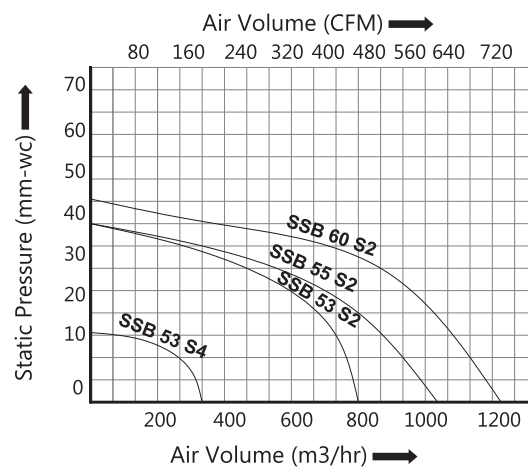

CONVENTIONAL DOUBLE INLET DOUBLE BLOWER

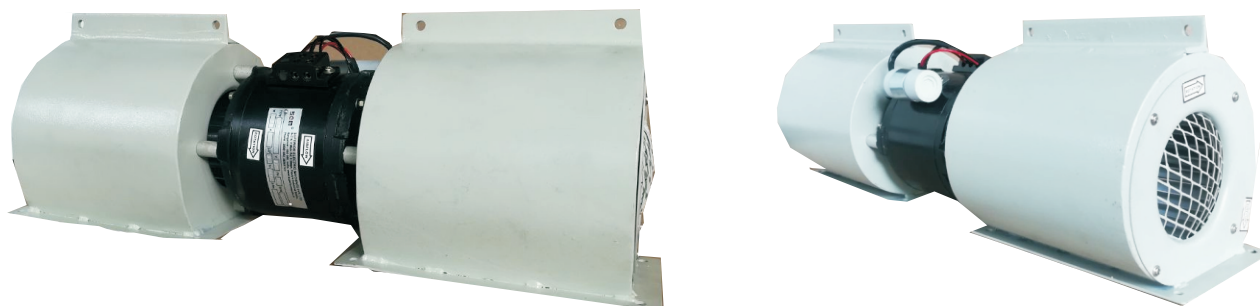


Technical Specification*

TYPE	I/P SUPPLY	AMPS (A)	WATTS (W)	RPM	AIRFLOW		STATIC-PR (mm-wc)	dBA	CAP. μf	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
					(CMH)	(CFM)					
SDB 75 S2	230V, 1Ø, 50Hz	2.40	520	2750	2500	1470	50	75	8	60	9

*Tolerance ±5% on Specified values

Dimensional Drawing

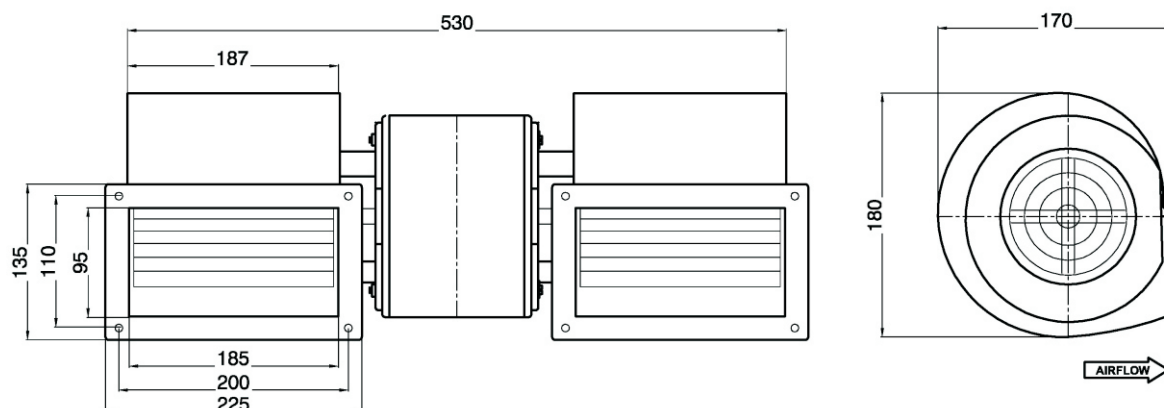

Performance Chart

