


CONVENTIONAL SINGLE INLET BLOWER

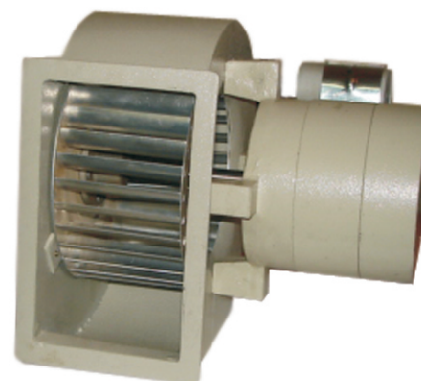

Technical Specification*

TYPE	I/P SUPPLY	AMPS (A)	WATTS (W)	RPM	AIRFLOW		STATIC-PR (mm-wc)	dBA	CAP. μ f	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
					(CMH)	(CFM)					
SSB 53 S2	230V, 1 ϕ , 50Hz	0.45	90	2750	450	265	42	65	4	60	3.4
SSB 55 S2	230V, 1 ϕ , 50Hz	0.50	120	2750	600	353	42	66	4	60	3.8
SSB 60 S2	230V, 1 ϕ , 50Hz	0.65	160	2750	650	382	45	68	4	60	4
SSB 63 S2	230V, 1 ϕ , 50Hz	0.7	170	2750	700	412	45	70	5	60	4.5


*Tolerance $\pm 5\%$ on Specified values

Dimensional Details

TYPE	A	B	C	D	E	F	G	H	I	J
SSB 53 (DI)	122	98	110	50	96	72	225	140	148	75*75
SSB 55 (DI)	162	96	148	84	135	70	260	139	145	75*75
SSB 60 (DI)	125	120	110	50	96	94	225	160	170	90*90
SSB 53 (SI)	120	186	105	145	90	160	228	202	220	105

Note: ALL DIMENSIONS ARE IN mm
 DI - Double inlet
 SI - Single inlet

Dimensional Drawing

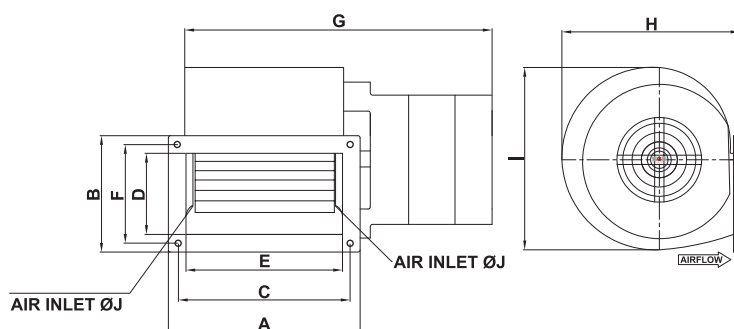

Performance Chart

