

DOUBLE INLET FORWARD CURVED IMPELLER 133 SERIES





Technical Specification*

TYPE	I/P SUPPLY	AMPS (A)	WATTS (W)	RPM	AIRFLOW		STATIC-PR (mm-wc)	dBA	CAP. μ f	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
					(CMH)	(CFM)					
SDB 133 T4	415V, 3 ϕ , 50Hz	0.38	100	1450	550	324	30	55	..	60	4.2
SDB 133 S2/35	230V, 1 ϕ , 50Hz	0.80	180	2300	825	485	44	60	3.15	60	4.2
SDB 133 S2/25	230V, 1 ϕ , 50Hz	0.5	140	1750	620	365	38	55	2.5	60	4.3
SDB 133 S4	230V, 1 ϕ , 50Hz	0.25	60	1400	500	295	28	55	2.0	60	4.2
SDB 133 T2	415V, 3 ϕ , 50Hz	0.25	175	2450	850	500	45	60	..	60	3.8

*Tolerance $\pm 5\%$ on Specified values

Dimensional Drawing

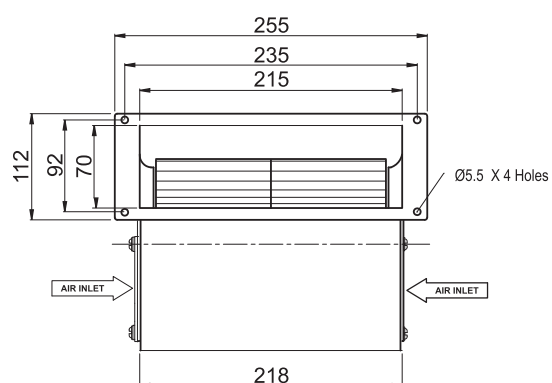

Performance Chart

