

DOUBLE INLET FORWARD CURVED IMPELLER 140 SERIES




Technical Specification*

TYPE	I/P SUPPLY	AMPS (A)	WATTS (W)	RPM	AIRFLOW		STATIC-PR (mm-wc)	dBA	CAP. μ f	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
					(CMH)	(CFM)					
SDB 140 S2	230V, 1 $\emptyset$, 50Hz	1.25	250	2450	900	529	47	72	6	60	5.3
SDB 140 S4	230V, 1 $\emptyset$, 50Hz	0.5	110	1400	620	365	25	65	4	60	5.3
SDB 140 T2	415V, 3 $\emptyset$, 50Hz	0.35	250	2300	850	500	46	72	..	60	5.3

*Tolerance $\pm 5\%$ on Specified values

Dimensional Drawing

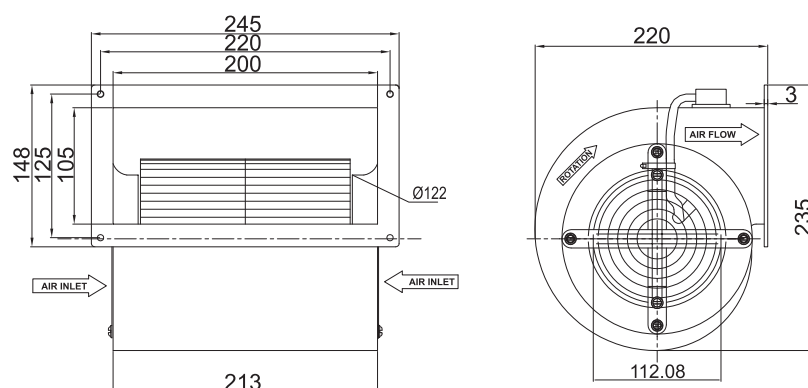

Performance Chart

